




POWERED BY:
PREMIER
premier.partners

An interpretation of:
**Unicredit Tower, César Pelli &
Vertical Forest, Stefano Boeri Architetti, MILAN (Italy), 2014**

PROFILES FOR WALLS

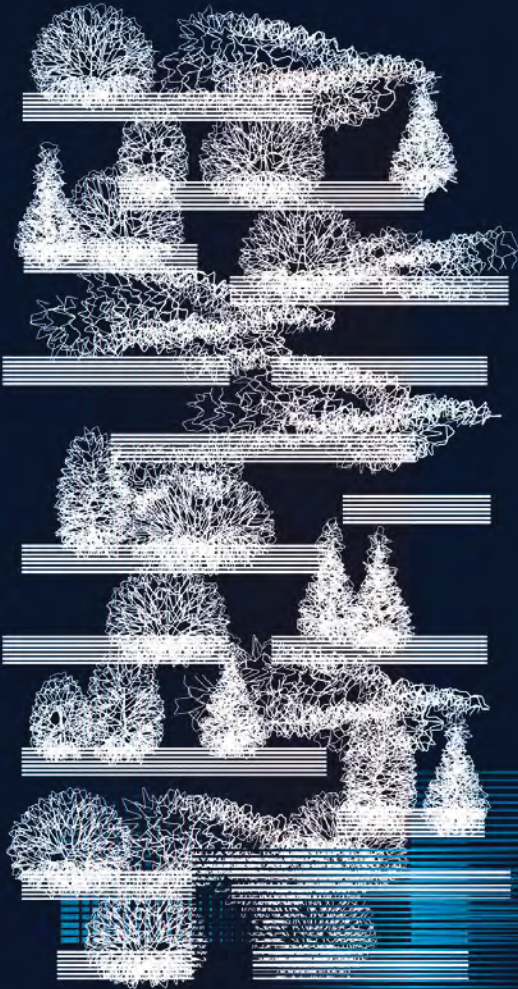


POWERED BY:

PREMIER
premier.partners


PROJOLLY SQUARE

POLISHED, SUPER POLISHED, SANDED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

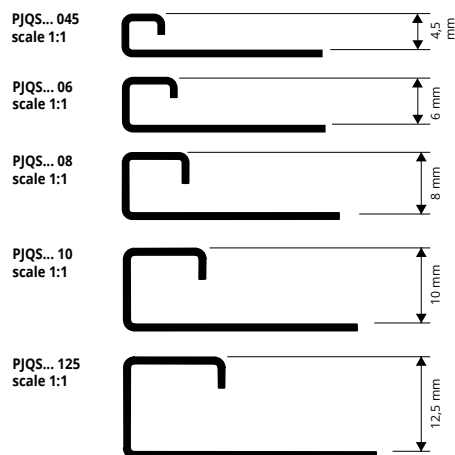

PJQSAC/S 11 & PJQSACML 11 AVAILABLE H 11 mm
PJQSAC/S 15 & PJQSACML 15 AVAILABLE H 15 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

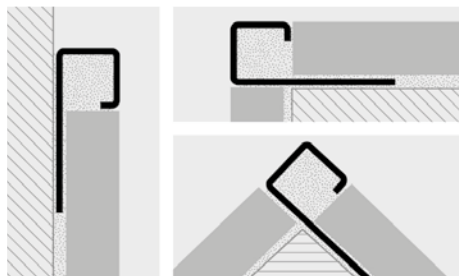

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROJOLLY SQUARE is a square corner bead profile in polished, super polished, sanded, brushed stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - Pack 20 Pcs - 54 lm (H 4,5 - 108 lm) - 8/10 mm

Article	H mm	€/lm	€/Pc
PJQSAC 045	4,5	9,58	25,87
PJQSAC 06	6	10,08	27,22
PJQSAC 07	7	10,37	28,00
PJQSAC 08	8	10,68	28,84
PJQSAC 09	9	10,95	29,57
PJQSAC 10	10	11,25	30,38
PJQSAC 11	11	11,69	31,56
PJQSAC 125	12,5	11,89	32,10
PJQSAC 15	15	12,96	34,99

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
thermo Packed

bar length 2,7 lm - Pack 20 Pcs - 54 lm - 8/10 mm

Article	H mm	€/lm	€/Pc
PJQSACML 045	4,5	12,89	34,80
PJQSACML 06	6	13,61	36,75
PJQSACML 07	7	14,11	38,10
PJQSACML 08	8	14,63	39,50
PJQSACML 09	9	15,29	41,28
PJQSACML 10	10	15,97	43,12
PJQSACML 11	11	16,28	43,96
PJQSACML 125	12,5	16,54	44,66
PJQSACML 15	15	18,59	50,19

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.



Brushed STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - Pack 20 Pcs - 54 lm (H 4,5 - 108 lm) - 8/10 mm

Article	H mm	€/lm	€/Pc
PJQSACS 045	4,5	11,11	30,00
PJQSACS 06	6	11,69	31,56
PJQSACS 07	7	12,89	34,80
PJQSACS 08	8	14,11	38,10
PJQSACS 09	9	14,47	39,07
PJQSACS 10	10	14,82	40,01
PJQSACS 11	11	15,07	40,69
PJQSACS 125	12,5	15,46	41,74
PJQSACS 15	15	16,42	44,33

SANDED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - Pack 20 Pcs - 54 lm - 8/10 mm

Article	H mm	€/lm	€/Pc
PJQSACSB 07	7	14,66	39,58
PJQSACSB 08	8	15,09	40,74
PJQSACSB 09	9	15,46	41,74
PJQSACSB 10	10	15,81	42,69
PJQSACSB 125	12,5	16,60	44,82

COLOURS



CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED, SUPER POLISHED, SATIN AND SANDED FINISH ST. STEEL AISI 304/1.4301-V2A / PLASTIC

* Capsules & end caps of the on demand profiles are also on demand

CAPSULES and END CAPS - POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSAC .../...	045/06/07/08/09/10/11/125/15	148,76	31,29
TPJQSAC .../...	045/06/07/08/09/10/11/125/15	28,13	6,13

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJQSAC 045/10

CAPSULES and END CAPS - SANDED STAINLESS STEEL AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACSB .../...	07/08/09/10/125	187,52	39,38
TPJQSACSB .../...	07/08/09/10/125	28,13	6,13

Choose the desired pack. & height
Ex.: 8 mm capsule in 10 Pcs Pack - CPJQSACSB 08/10

CAPSULES and END CAPS - BRUSHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACS .../...	045/06/07/08/09/10/11/125/15	167,23	35,12
TPJQSACS .../...	045/06/07/08/09/10/11/125/15	28,13	6,13

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJQSACS 045/10

JOINTS - PLASTIC


Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ .../...	045/06/07/08/09/10/11/125/15	26,81	5,87

Choose the desired pack. & height
Ex.: 4,5 mm joint in 10 Pcs Pack - GIJQ 045/10

CAPSULES - SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACML .../...	045/06/07/08/09/10/11/125/15	185,23	38,96
TPJQSACML .../...	045/06/07/08/09/10/11/125/15	25,58	5,58

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJQSACML 045/10

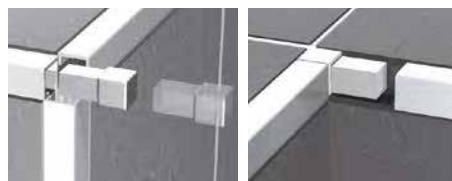

JOINT

CAPSULE

END CAP



GIJQ .../...



CPJQS... /...



TPJQS... /...

News 2022

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole Packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOLLY SQUARE is a square corner bead profile in polished stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section and the availability of special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PROJOLLY SQUARE

POLISHED, BRUSHED STAINLESS STEEL
AISI 316LL/1.4404-V4A



POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A
with protective film
bar length 2,7 LM - Pack 20 Pcs - 54 lm - 8/10 mm



Article	H mm	€/lm	€/Pc
PJQSACM 08	8	13,86	37,42 *
PJQSACM 10	10	14,61	39,45
PJQSACM 11	11	15,20	41,04
PJQSACM 125	12,5	15,45	41,72

COLOURS



ACM - Polished stainless st.
AISI 316LL



BRUSHED STAINLESS STEEL AISI 316LL/1.4404-V4A
with protective film
bar length 2,7 LM - Pack 20 Pcs - 54 lm - 8/10 mm



Article	H mm	€/lm	€/Pc
PJQSACMS 10	10	18,99	51,27 *
PJQSACMS 11	11	19,77	53,38 *
PJQSACMS 125	12,5	20,08	54,22 *

COLOURS



ACMS - Brushed stainless st.
AISI 316LL

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PJQSACM 08
scale 1:1



PJQS... 10
scale 1:1



PJQS... 11
scale 1:1



PJQS... 125
scale 1:1



INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS

STAINLESS STEEL AISI 316LL

Capsules & end caps of the on demand profiles are also on demand *

CAPSULES and END CAPS - POLISHED STAINLESS STEEL AISI 316LL/1.4404

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACM .../...	08/10/11/12,5	193,32	40,58
TPJQSACM .../...	08/10/11/12,5	36,47	7,30

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs PACMk - CPJQSACM 10/10

CAPSULES and END CAPS - BRUSHED STAINLESS STEEL AISI 316LL/1.4404


Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSACMS .../...	10/11/125	193,32	40,58
TPJQSACMS .../...	10/11/125	36,47	7,30

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs PACMk - CPJQSACMS 10/10

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ .../...	08/10/11/125	26,81	5,87

Choose the desired pack. & height
Ex.: 8 mm joint in 10 Pcs Pack - GIJQ 08/10



END CAP



TPJQSACM .../...

CAPSULE



CPJQSACM .../...

JOINT



GIJQ .../...



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole Packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.



PROJOLLY SQUARE is a square corner bead profile in chromed brass or antique brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section and elegance and the availability of special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY SQUARE

CHROMED BRASS, BRUSHED AND ANTIQUE BRASS




CHROMED BRASS thermo Packed
bar length 2,7 lm - Pack 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PJQSOC 045	4,5	18,95	51,16
PJQSOC 06	6	21,63	58,40
PJQSOC 08	8	25,57	69,04
PJQSOC 10	10	27,30	73,71
PJQSOC 125	12,5	28,30	76,41



BRUSHED BRASS thermo Packed
bar length 2,7 lm - Pack 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PJQSOS 045	4,5	12,60	34,02
PJQSOS 06	6	14,65	39,56
PJQSOS 08	8	16,01	43,23
PJQSOS 10	10	17,06	46,06
PJQSOS 125	12,5	17,75	47,93

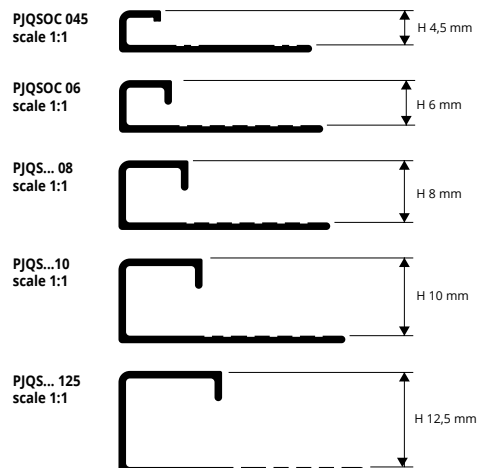

ANTIQU BRASS thermo Packed bar length 2,7 lm
Pack 20 Pcs - 54 lm (PJQSOB 125 - Pack 10 Pcs)

Article	H mm	€/lm	€/Pc
PJQSOB 08	8	32,29	87,18
PJQSOB 10	10	35,07	94,69
PJQSOB 125	12,5	37,01	99,93


COLOURS



INSTRUCTIONS FOR LAYING

1. Choose "PROJOLLY SQUARE" according to the tile thickness.
2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

EXAMPLES OF LAYING

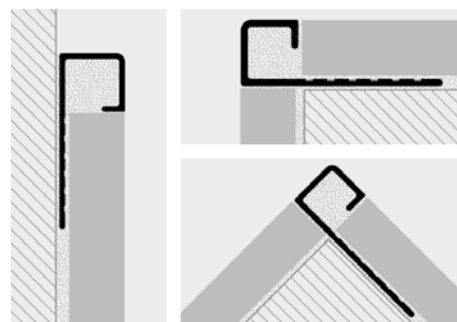

CAPSULES, END CAPS and THREE-WAYS JOINTS

CHROMED BRASS - PLASTIC

Capsules & end caps of the on demand profiles are also on demand *

CAPSULES and END CAPS - CHROMED BRASS

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSOC .../...	045/06/08/10/125	151,66	31,86
TPJQSOC .../...	045/06/08/10/125	28,61	6,02

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSOS 10/10

CAPSULES and END CAPS - ANTIQUE BRASS

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSOS .../...	08/10/125	195,01	41,05
TPJQSOS .../...	08/10/125	36,82	3,86

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSOS 10/10

CAPSULES and END CAPS - BRUSHED BRASS

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSOS .../...	045/06/08/10/125	151,66	31,86
TPJQSOS .../...	045/06/08/10/125	28,61	6,02

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSOS 10/10

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ .../...	045/06/08/10/125	26,81	5,87

Choose the desired pack. & height
Ex.: 8 mm joint in 10 Pcs Pack - GIJQ 08/10

JOINT



GIJQ .../...

CAPSULE




CPJQSOC .../...

END CAP




TPJQSOC .../...




PROJOLLY SQUARE

ANODIZED AND POLISHED ALUMINIUM

PROJOLLY SQUARE is a square corner bead profile in anodized and polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance, the availability in eight finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.

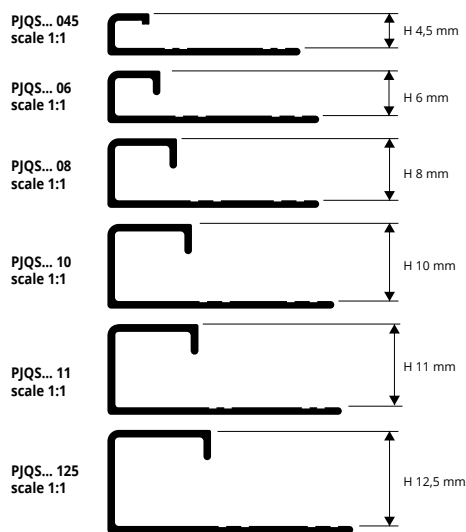

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

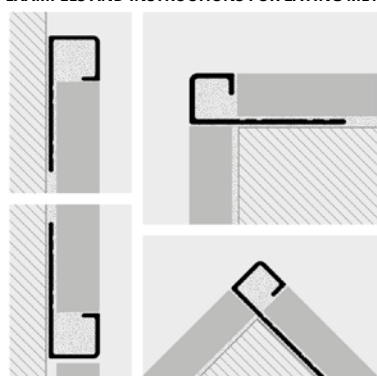

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



ANODIZED ALUMINIUM thermo Packed (silver-gold-copper-titanium-black)
bar length 2,7 lm - Pack 40 Pcs - 108 lm (H 12,5 mm - Pack 20 Pcs - 54 lm)

Article	H mm	€/lm	€/Pc
PJQSAA 045	4,5	5,37	14,50
PJQSAA 06	6	5,37	14,50
PJQSAA 08	8	5,41	14,61
PJQSAA 10	10	5,81	15,69
PJQSAA 11	11	6,28	16,96
PJQSAA 125	12,5	6,64	17,93
PJQSAO 08	8	6,20	16,74
PJQSAO 10	10	6,70	18,09
PJQSAO 125	12,5	7,41	20,01
PJQSAR 045	4,5	6,83	18,44
PJQSAR 06	6	7,15	19,31
PJQSAR 08	8	7,41	20,01
PJQSAR 10	10	7,79	21,03
PJQSAR 125	12,5	8,31	22,44
PJQSAT 045	4,5	5,63	15,20
PJQSAT 06	6	5,94	16,04
PJQSAT 08	8	6,20	16,74
PJQSAT 10	10	6,70	18,09
PJQSAT 11	11	7,09	19,14
PJQSAT 125	12,5	7,41	20,01
PJQSNE 08	8	10,26	27,70
PJQSNE 10	10	10,88	29,38
PJQSNE 11	11	12,13	32,75
PJQSNE 125	12,5	13,62	36,77



POLISHED ALUMINIUM thermo Packed (chrome-gold-titanium-copper-black)
bar length 2,7 lm - Pack 40 Pcs - 108 lm (H 12,5 mm - Pack 20 Pcs - 54 lm)

Article	H mm	€/lm	€/Pc
PJQSBC 045	4,5	8,87	23,95
PJQSBC 06	6	8,87	23,95
PJQSBC 08	8	8,95	24,16
PJQSBC 10	10	9,84	26,57
PJQSBC 11	11	10,47	28,27
PJQSBC 125	12,5	11,11	30,00
PJQSBO 08	8	8,95	24,16
PJQSBO 10	10	9,84	26,57
PJQSBO 125	12,5	11,11	30,00
PJQSBP 045	4,5	8,87	23,95
PJQSBP 06	6	8,87	23,95
PJQSBP 08	8	8,95	24,16
PJQSBP 10	10	9,84	26,57
PJQSBP 125	12,5	11,11	30,00
PJQSBT 045	4,5	8,87	23,95
PJQSBT 06	6	8,87	23,95
PJQSBT 08	8	8,95	24,16
PJQSBT 10	10	9,84	26,57
PJQSBT 11	11	10,47	28,27
PJQSBT 125	12,5	11,11	30,00
PJQSBN 08	8	11,51	31,08
PJQSBN 10	10	12,18	32,89
PJQSBN 11	11	12,56	33,91
PJQSBN 125	12,5	12,99	35,07

COLOURS

ANODIZED				
AA - Anod. silver alum.	AO - Anod. gold alum.	AR - Anod. copper alum.	AT - Anod. titanium alum.	NE - Anod. black alum.
POLISHED				
BC - Pol. chrome alum.	BO - Pol. gold alum.	BR - Pol. copper alum.	BT - Pol. titanium alum.	BN - Pol. black alum.

CAPSULES, END CAPS and THREE-WAYS JOINTS

* Capsules & end caps of the on demand profiles are also on demand

ANODIZED AND POLISHED ALUMINIUM / PLASTIC

CAPSULES and END CAPS - ANODIZED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSAA .../...	045/06/08/10/11/125	60,97	13,40
TPJQSAA .../...	045/06/08/10/11/125	28,13	6,13
CPJQSAO .../...	8/10/125	69,07	14,68
TPJQSAO .../...	8/10/125	28,13	6,13
CPJQSAR .../...	045/06/08/10/125	69,07	14,68
TPJQSAR .../...	045/06/08/10/125	28,13	6,13
CPJQSAT .../...	045/06/08/10/11/125	69,07	14,68
TPJQSAT .../...	045/06/08/10/11/125	28,13	6,13
CPJQSNE .../...	08/10/11/125	89,84	19,75
TPJQSNE .../...	08/10/11/125	28,13	6,13

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSAA 10/10

CAPSULES and END CAPS - POLISHED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSBC .../...	045/06/08/10/11/125	60,97	13,40
TPJQSBC .../...	045/06/08/10/11/125	28,13	6,13
CPJQSBO .../...	8/10/125	69,07	14,68
TPJQSBO .../...	8/10/125	28,13	6,13
CPJQSBP .../...	045/06/08/10/125	69,07	14,68
TPJQSBP .../...	045/06/08/10/125	28,13	6,13
CPJQSBT .../...	045/06/08/10/11/125	69,07	14,68
TPJQSBT .../...	045/06/08/10/11/125	28,13	6,13
CPJQSBN .../...	08/10/11/125	89,84	19,75
TPJQSBN .../...	08/10/11/125	28,13	6,13

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSBC 10/10

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ .../...	045/06/08/10/11/125	26,81	5,87

Choose the desired pack. & height
Ex.: 8 mm joint in 10 Pcs Pack - GIJQ 08/10



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOLLY SQUARE is a square corner bead profile in brushed and tiltex aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance, the availability in eight finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY SQUARE

BRUSHED POLISHED AND
ANODIZED BRUSHED TILTEX ALUMINIUM



BRUSHED POLISHED ALUM. thermo Packed (silver-gold-copper titanium-black)
bar length 2,7 lm - Pack 40 Pcs - 108 lm (H 12,5 mm - Pack 20 Pcs - 54 lm)

Article	H mm	€/lm	€/Pc
PJQSBS 045	4,5	9,64	26,03
PJQSBS 06	6	9,96	26,89
PJQSBS 08	8	10,08	27,22
PJQSBS 10	10	10,86	29,32
PJQSBS 11	11	11,51	31,08
PJQSBS 125	12,5	12,26	33,10
PJQSRS 045	4,5	9,64	26,03
PJQSRS 06	6	9,96	26,89
PJQSRS 08	8	10,08	27,22
PJQSRS 10	10	10,86	29,32
PJQSRS 125	12,5	12,26	33,10
PJQSTS 045	4,5	9,64	26,03
PJQSTS 06	6	9,96	26,89
PJQSTS 08	8	10,08	27,22
PJQSTS 10	10	10,86	29,32
PJQSTS 11	11	11,51	31,08
PJQSTS 125	12,5	12,26	33,10
PJQSBOS 08	8	10,08	27,22
PJQSBOS 10	10	10,86	29,32
PJQSBOS 125	12,5	12,26	33,10
PJQSBAS 10	10	10,86	29,32
PJQSBAS 125	12,5	12,26	33,10
PJQSNS 08	8	13,11	35,40
PJQSNS 10	10	14,11	38,10
PJQSNS 11	11	14,98	40,45
PJQSNS 125	12,5	15,94	43,04

ANOD. BRUSHED TILTEX ALUM. thermo Packed (silver-copper-titanium)
- bar length 2,7 lm - Pack 40 Pcs - 108 lm (H 12,5 mm - Pack 20 Pcs - 54 lm)


Article	H mm	€/lm	€/Pc
PJQSBX 06	6	11,36	30,67
PJQSBX 08	8	12,72	34,34
PJQSBX 10	10	13,61	36,75
PJQSBX 11	11	14,31	38,64
PJQSBX 125	12,5	15,07	40,69
PJQSRX 06	6	11,36	30,67
PJQSRX 08	8	12,72	34,34
PJQSRX 10	10	13,61	36,75
PJQSRX 125	12,5	15,07	40,69
PJQSTX 06	6	11,36	30,67
PJQSTX 08	8	12,72	34,34
PJQSTX 10	10	13,61	36,75
PJQSTX 11	11	14,31	38,64
PJQSTX 125	12,5	15,07	40,69

COLOURS

BRUSHED POLISHED		
BS - Br. polish, silver alum.	BOS - Br. polish, gold alum.	RS - Br. polish, copper alum.
TS - Br. polish, titanium alum.	NS - Br. polish, black alum.	BRAS - Br. polish, antique bronze alum.
ANOD. BRUSHED TILTEX		
BX - Silver TILTEX	RX - Copper TILTEX	TX - Titanium TILTEX

PJQS... 045 scale 1:1		H 4,5 mm
PJQS... 06 scale 1:1		H 6 mm
PJQS... 08 scale 1:1		H 8 mm
PJQS... 10 scale 1:1		H 10 mm
PJQS... 11 scale 1:1		H 11 mm
PJQS... 125 scale 1:1		H 12,5 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

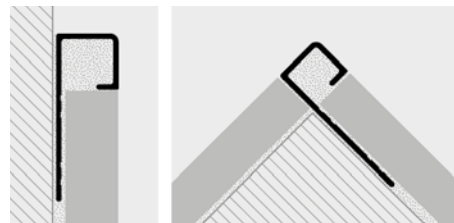

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS

ANODIZED BRUSHED POLISHED ALUMINIUM, TILTEX / PLASTIC

Capsules & end caps of the on demand profiles are also on demand *

CAPSULES and END CAPS - BRUSHED POLISHED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSBS .../...	045/06/08/10/11/125	69,07	14,68
TPJQSBS .../...	045/06/08/10/11/125	28,13	6,13
CPJQSRS .../...	045/06/08/10/125	69,07	14,68
TPJQSRS .../...	045/06/08/10/125	28,13	6,13
CPJQTS .../...	045/06/08/10/11/125	69,07	14,68
TPJQTS .../...	045/06/08/10/11/125	28,13	6,13
CPJQSBOS .../...	08/10/125	69,07	14,68
TPJQSBOS .../...	08/10/125	28,13	6,13
CPJQSBAS .../...	10/125	69,07	14,68
TPJQSBAS .../...	10/125	28,13	6,13
CPJQSNS .../...	08/10/11/125	69,07	14,68
TPJQSNS .../...	08/10/11/125	28,13	6,13

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSBS 10/10

CAPSULES and END CAPS - ANODIZED BRUSHED TILTEX ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSBX .../...	06/08/10/11/125	90,68	19,03
TPJQSBX .../...	06/08/10/11/125	28,13	6,13
CPJQSRX .../...	06/08/10/125	90,68	19,03
TPJQSRX .../...	06/08/10/125	28,13	6,13
CPJQSTX .../...	06/08/10/11/125	90,68	19,03
TPJQSTX .../...	06/08/10/11/125	28,13	6,13

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSBX 10/10

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ .../...	045/06/08/10/11/125	26,81	5,87

Choose the desired pack. & height
Ex.: 8 mm joint in 10 Pcs Pack - GIJQ 08/10



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.


PROJOLLY SQUARE

ALUMINIUM STONE LINE, VARNISHED ALUMINIUM AND TUSCANY LINE

PROJOLLY SQUARE is a corner bead profile in powder coated aluminum that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability of several finishes and special pieces such as internal and external corners, junctions and end caps make **PROJOLLY SQUARE** an elegant and much-sought after profile. workmanlike application.

PJQSA 045-... scale 1:1		H 4,5 mm
PJQSA 06-... scale 1:1		H 6 mm
PJQSA 08-... scale 1:1		H 8 mm
PJQSA 10-... scale 1:1		H 10 mm
PJQSA 11-... scale 1:1		H 11 mm
PJQSA 125-... scale 1:1		H 12,5 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

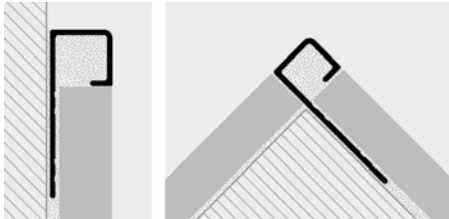

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



STONE LINE thermo Packed

bar length 2,7 lm - Pack 20 Pcs-54 lm

Article	H mm	€/lm	€/Pc
PJQSA 06-SL...	6	8,70	23,49
PJQSA 08-SL...	8	9,02	24,35
PJQSA 10-SL...	10	9,33	25,19
PJQSA 11-SL...	11	9,64	26,03
PJQSA 125-SL...	12,5	9,95	26,86

Available in the colours: SL01 - SL02 - SL03 - SL04 - SL05 - SL06 - SL07 - SL08 - SL09 - SL10 - SL11 - SL12 - SL13.



WHITE VARNISHED ALUMINIUM thermo Packed

bar length 2,7 lm - Pack 20 Pcs - 54 lm (white colour 40 Pcs-108 lm)

Article	H mm	€/lm	€/Pc
PJQSA 045-01	4,5	6,31	17,04
PJQSA 08-01	8	6,52	17,60
PJQSA 10-...	10	7,02	18,95
PJQSA 11-01	11	7,34	19,82
PJQSA 125-01	12,5	7,65	20,66

Available in the colours: 01 - 0106 - 02 - 11. Available on demand 010 - 03 - 0211 - 0311 - 06 - 10 - 17 with a minimum quantity order of 100 pcs.

TUSCANY LINE thermo Packed

bar length 2,7 lm - Pack 40 Pcs- 108 lm (H 12,5 mm - Pack 20 Pcs)

Article	H mm	€/lm	€/Pc
PJQSA 08-...	8	8,70	23,49
PJQSA 10-...	10	9,20	24,84
PJQSA 125-...	12,5	9,95	26,86

Available in the colours: 03TU - 05TU - 20TU.

The code of the selected colour must be added to the article code. E.g.: PJQA 08-... (chosen colour tuscanry grey) PJQA 08-03TU.

COLOURS

STONE LINE						
SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greyvory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	SL07 - Stone antragra
SL08 - Stone antradark	SL09 - Stone bronze	SL10 - Stone corten	SL11 - Stone brown	SL12 - Stone black	SL13 - Stone oyster grey	
VARNISHED						
01 - White varnished aluminium (9016)	010 - White Matt varnished aluminium (9016)	0106 - White ivory varnished aluminium (9001)	02 - Light grey varnished aluminium (7035)	11 - Black varnished aluminium (9005)	03TU - Tuscany grey	05TU - Tuscany beige
03 - Stone grey varnished alum. (7030)	0211 - Varnished quartz grey alum. (7039)	0311 - Varnished asphalt grey alum. (7043)	06 - Varnished ivory alum. (1015)	10 - Klinker red varnished alum. (8004)	17 - Varnished bahama beige alum.	

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

03 - Stone grey varnished alum. (7030)	0211 - Varnished quartz grey alum. (7039)	0311 - Varnished asphalt grey alum. (7043)	06 - Varnished ivory alum. (1015)	10 - Klinker red varnished alum. (8004)	17 - Varnished bahama beige alum.

CAPSULES, END CAPS and THREE-WAYS JOINTS

ALUMINIUM STONE LINE, TUSCANY LINE AND VARNISHED ALUMINIUM / PLASTIC

* Capsules & end caps of the on demand profiles are also on demand

CAPSULES and END CAPS - STONE LINE

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSA ...-SL.../...	06/08/10/11/12/5	71,48	15,73
TPJQSA ...-SL.../...	06/08/10/11/12/5	46,00	10,12

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSA 10-SL01/10

CAPSULES and END CAPS - VARNISHED


Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSA ...-.../...	045/08/10/11/12/5	62,31	13,70
TPJQSA ...-.../...	045/08/10/11/12/5	28,13	6,13

Choose the desired pack. & height
Ex.: 8 mm capsule in 10 Pcs Pack - CPJQSA 10-03/10

CAPSULES and END CAPS - TUSCANY LINE

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQSA ...-...TU/...	08/10/12/5	96,36	21,20

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs Pack - CPJQSA 10-03/10

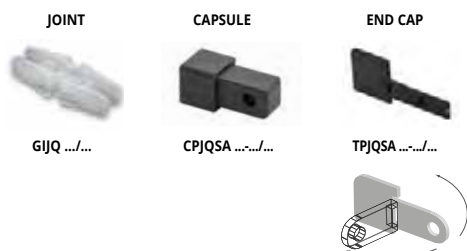

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQ .../...	045/06/08/10/11/12/5	26,81	5,87

Choose the desired pack. & height
Ex.: 8 mm joint in 10 Pcs Pack - GIJQ 08/10

PROJOLLY SQUARE is a square corner bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability in different colours also on demand and special pieces such as internal and external corners make **PROJOLLY SQUARE** a much sought-after profile. It can be easily matched with the wall covering and that allows an elegant workmanlike application.

PROJOLLY SQUARE

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN




NON-TOXIC SHOCKPROOF VINYL RESIN
bar length 2,7 lm - Pack 20 Pcs - 54 lm (white colour 40 Pcs-108 lm)


Article	H mm	€/lm	€/Pc
PJQ 06-...	6	1,26	3,40
PJQ 08-...	8	1,31	3,54
PJQ 10-...	10	1,43	3,86
PJQ 125-...	12,5	1,55	4,19

H 6 mm available the colours 01, other colours on demand.
Available in the colours: 00-01-0106-03-06-12-17. On demand 02-04-05-07-08-09-10-11-13-14-15-16-18-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs.
The code of the selected colour must be added to the article code.
E.g.: PJQ 08-... (chosen colour white) PJQ 08-01.

WHITE NOT FOR SALE SINGLY

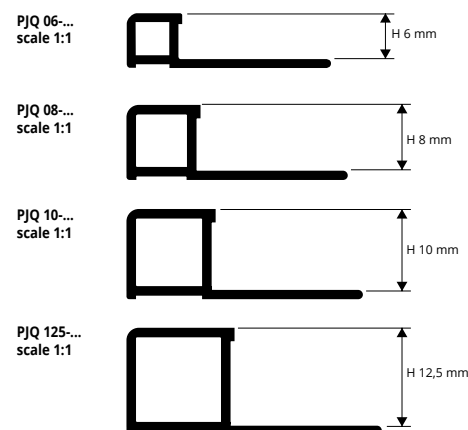

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

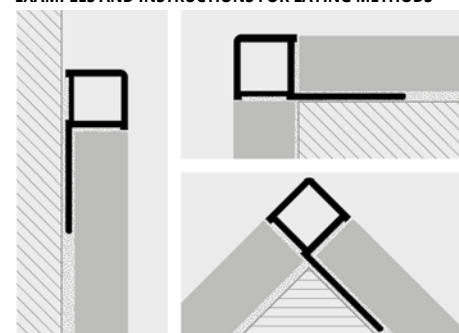

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired colour. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS


00 - White ice	01 - White	0106 - White ivory
03 - Cement gray	06 - Ivory	12 - Silver
17 - Bahama beige		

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

02 - Light grey	04 - Light beige	05 - Dark beige	07 - Pink	08 - Sky blue	09 - Yellow
10 - Red	11 - Black	13 - Gold	14 - Green	15 - Brown	16 - Blue
18 - Grey	19 - Beige	20 - Dark ivory	21 - Light pink	22 - Dark pink	23 - Dark antique pink
24 - Dark sky blue	25 - Brick red	26 - Turquoise green	27 - Dark green	28 - Hazel brown	29 - Dark brown

CAPSULES and THREE-WAYS JOINTS

POLYPROPYLENE / POLYETYLENE UV RESISTANT

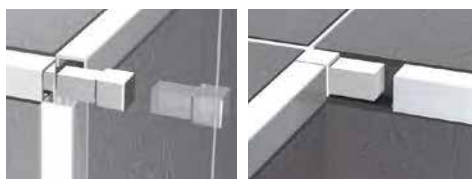

INTERNAL CAPSULES POLYPROPYLENE/POLYETYLENE

Article	H mm	€/Pack 20 Pcs	€/Pack 5 Pcs
IPJQ 06-.../...	6	21,07	6,31
IPJQ 08-.../...	8	21,51	6,43
IPJQ 10-.../...	10	22,01	6,58
IPJQ 125-.../...	12,5	22,72	7,41

EXTERNAL CAPSULES POLYPROPYLENE/POLYETYLENE

Article	H mm	€/Pack 20 Pcs	€/Pack 5 Pcs
CPJQ 06-.../...	6	21,07	6,31
CPJQ 08-.../...	8	21,51	6,43
CPJQ 10-.../...	10	22,01	6,58
CPJQ 125-.../...	12,5	22,72	7,41

H 6 mm available the colours 01, other colours on demand.
Available in the colours: 00-01-0106-03-06-12-17. On demand 02-04-05-07-08-09-10-11-13-14-15-16-18-19-20-21-22-23-24-25-26-27-28-29
The code of the selected colour must be added to the article code.
E.g.: CPJQ 08-.../... (chosen colour white) CPJQ 08-01/20.
IPJQ 08-.../... (chosen colour white) IPJQ 08-01/20.

INTERNAL CAPSULES



IPJQ ...-.../...

EXTERNAL CAPSULES




CPJQ ...-.../...


PROJOLLY QUART

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROJOLLY QUART is a quarter-circle rounded bead profile in polished, super polished and brushed stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY QUART** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

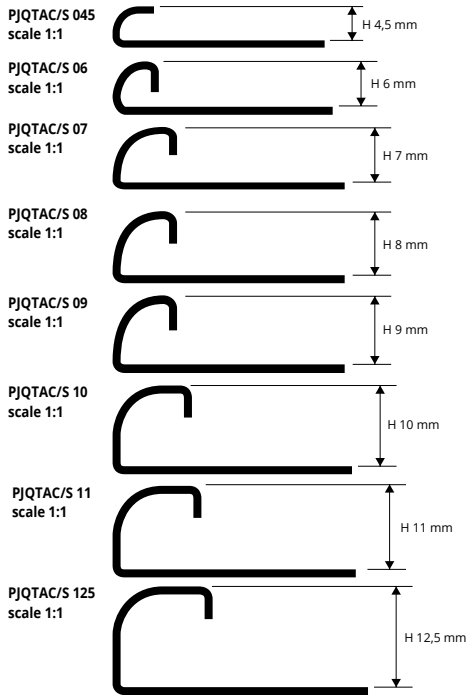

EXAMPLES FOR LAYING METHODS



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
 bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 4,5 mm - 108 lm) - 10/10 mm

Article	H mm	€/lm	€/Pc
PJQTAC 045	4,5	10,61	28,65
PJQTAC 06	6	11,56	31,21
PJQTAC 07	7	11,95	32,27
PJQTAC 08	8	12,33	33,29
PJQTAC 09	9	12,80	34,56
PJQTAC 10	10	13,28	35,86
PJQTAC 11	11	13,80	37,26
PJQTAC 125	12,5	14,24	38,45

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A thermo packed
 bar length 2,7 lm - pack. 20 Pcs 54 lm (H 4,5 mm - 108 ml) - 10/10 mm

Article	H mm	€/lm	€/Pc
PJQTACML 045	4,5	12,89	34,80
PJQTACML 06	6	14,44	38,99
PJQTACML 07	7	14,85	40,09
PJQTACML 08	8	15,20	41,04
PJQTACML 09	9	15,70	42,39
PJQTACML 10	10	16,16	43,63
PJQTACML 11	11	16,66	44,98
PJQTACML 125	12,5	17,05	46,04



Brushed STAINLESS ST. AISI 304/1.4301-V2A with protective film
 bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 4,5 mm - 108 lm) - 10/10 mm

Article	H mm	€/lm	€/Pc
PJQTACS 045	4,5	13,35	36,05
PJQTACS 06	6	13,85	37,40
PJQTACS 07	7	14,31	38,64
PJQTACS 08	8	14,68	39,64
PJQTACS 09	9	15,21	41,07
PJQTACS 10	10	15,71	42,42
PJQTACS 11	11	16,17	43,66
PJQTACS 125	12,5	16,54	44,66

COLOURS

AC - Polished stainless st. AISI 304/1.4301-V2A	ACML - Super polished stainless st. AISI 304/1.4301-V2A	ACS - Brushed stainless st. AISI 304/1.4301-V2A
---	---	---

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROJOLLY QUART" according to the tile thickness and desired finish.
2. Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY QUART" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS

* Capsules & end caps of the on demand profiles are also on demand

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS ST. AISI 304/1.4301-V2A / PLASTIC

CAPSULES and END CAPS - POLISHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTAC 045/...	4,5	136,08	30,01
IPJQTAC 045/...	4,5	136,08	30,01
CPJQTAC 06/...	6	141,76	31,94
IPJQTAC 06/...	6	141,76	31,94
CPJQTAC 07/...	7	145,50	32,23
IPJQTAC 07/...	7	145,50	32,23
CPJQTAC 08/...	8	148,16	32,51
IPJQTAC 08/...	8	148,16	32,51
CPJQTAC 09/...	9	153,35	32,85
IPJQTAC 09/...	9	153,35	32,85
CPJQTAC 10/...	10	158,30	33,20
IPJQTAC 10/...	10	158,30	33,20
CPJQTAC 11/...	11	166,04	34,48
IPJQTAC 11/...	11	166,04	34,48
CPJQTAC 125/...	12,5	172,43	35,76
IPJQTAC 125/...	12,5	172,43	35,76
TPJQTAC 045-06-08-10-11-125-.../...		28,13	6,13

Choose the desired packaging: E.g.: CPJQTAC .../10 (Pack. 10 Pcs)
 CPJQTAC .../2 (Pack. 2 Pcs)

CAPSULES and END CAPS - BRUSHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTACS 045/...	4,5	158,30	34,48
IPJQTACS 045/...	4,5	158,30	34,48
CPJQTACS 06/...	6	159,76	35,12
IPJQTACS 06/...	6	159,76	35,12
CPJQTACS 07/...	7	160,36	35,50
IPJQTACS 07/...	7	160,36	35,50
CPJQTACS 08/...	8	160,95	35,76
IPJQTACS 08/...	8	160,95	35,76
CPJQTACS 09/...	9	166,04	36,10
IPJQTACS 09/...	9	166,04	36,10
CPJQTACS 10/...	10	171,10	36,40
IPJQTACS 10/...	10	171,10	36,40
CPJQTACS 11/...	11	177,26	37,36
IPJQTACS 11/...	11	177,26	37,36
CPJQTACS 125/...	12,5	182,70	38,31
IPJQTACS 125/...	12,5	182,70	38,31
TPJQTACS 045-06-08-10-11-125-.../...		28,13	6,13

Choose the desired packaging: E.g.: CPJQTACS .../10 (Pack. 10 Pcs)
 CPJQTACS .../2 (Pack. 2 Pcs)

CAPSULES - SUPER POLISHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTACML 045/...	4,5	158,30	34,48
IPJQTACML 045/...	4,5	158,30	34,48
CPJQTACML 06/...	6	159,76	35,12
IPJQTACML 06/...	6	159,76	35,12
CPJQTACML 07/...	7	160,36	35,50
IPJQTACML 07/...	7	160,36	35,50
CPJQTACML 08/...	8	160,95	35,76
IPJQTACML 08/...	8	160,95	35,76
CPJQTACML 09/...	9	166,04	36,10
IPJQTACML 09/...	9	166,04	36,10
CPJQTACML 10/...	10	171,10	36,40
IPJQTACML 10/...	10	171,10	36,40
CPJQTACML 11/...	11	177,26	37,36
IPJQTACML 11/...	11	177,26	37,36
CPJQTACML 125/...	12,5	182,70	38,31
IPJQTACML 125/...	12,5	182,70	38,31

Choose the desired packaging: E.g.: CPJQTACML .../10 (Pack. 10 Pcs)
 CPJQTACML .../2 (Pack. 2 Pcs)

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQT 045/...	4,5	26,81	5,87
GIJQT 06/...	6	26,81	5,87
GIJQT 07/...	7	26,81	5,87
GIJQT 08/...	8	26,81	5,87
GIJQT 09/...	9	26,81	5,87
GIJQT 10/...	10	26,81	5,87
GIJQT 11/...	11	26,81	5,87
GIJQT 125/...	12,5	26,81	5,87

Choose the desired packaging: E.g.: GIJQT .../10 (Pack. 10 Pcs)
 GIJQT .../2 (Pack. 2 Pcs)



News 2021

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOLLY QUART is a quarter-circle rounded bead profile in anodized and polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles. Its particular section and elegance, the availability in four finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY QUART** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY QUART

ANODIZED AND POLISHED ALUMINIUM



ANODIZED ALUMINIUM (silver-titanium-gold-antique bronze) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 12,5 mm, 15 mm - pack. 20 Pcs)

Article	H mm	€/lm	€/Pc
PJQTAA 06	6	4,99	13,47
PJQTAA 08	8	5,30	14,31
PJQTAA 10	10	5,72	15,44
PJQTAA 11	11	6,36	17,17
PJQTAA 125	12,5	6,46	17,44
PJQTAA 15	15	7,21	19,47
PJQTAO 06	6	4,99	13,47
PJQTAO 08	8	5,30	14,31
PJQTAO 10	10	5,72	15,44
PJQTAO 11	11	6,36	17,17
PJQTAO 125	12,5	6,46	17,44
PJQTAT 08	8	5,86	15,82
PJQTAT 10	10	6,36	17,17
PJQTAT 11	11	6,71	18,12
PJQTAT 125	12,5	7,16	19,33
PJQTBRA 10	10	10,16	27,43
PJQTBRA 125	12,5	11,06	29,86

COLOURS


ANODIZED		
AA - Anodized silver alum.	BRA - Anod. antique bronze alum.	AO - Anod. gold alum.
AT - Anod. titanium alum.		



POLISHED ALUMINIUM (chrome-titanium-gold) thermo packed - bar length 2,7 lm
- pack. 40 Pcs - 108 lm (H 15 mm - 54 lm) - (H 12,5 mm, 15 mm - pack. 20 Pcs)

Article	H mm	€/lm	€/Pc
PJQTBC 06	6	8,12	21,92
PJQTBC 08	8	8,75	23,63
PJQTBC 10	10	9,71	26,22
PJQTBC 11	11	10,32	27,86
PJQTBC 125	12,5	10,97	29,62
PJQTBC 15	15	11,41	30,81
PJQTBO 06	6	8,12	21,92
PJQTBO 08	8	8,75	23,63
PJQTBO 10	10	9,71	26,22
PJQTBO 11	11	10,32	27,86
PJQTBO 125	12,5	10,97	29,62
PJQBT 08	8	8,75	23,63
PJQBT 10	10	9,71	26,22
PJQBT 11	11	10,32	27,86
PJQBT 125	12,5	10,97	29,62

PJQT... 06
scale 1:1



PJQT... 08
scale 1:1



PJQT... 10
scale 1:1



AVAILABLE PJQT... 11 - H 11MM


PJQT... 125
scale 1:1



PJQT... 15
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

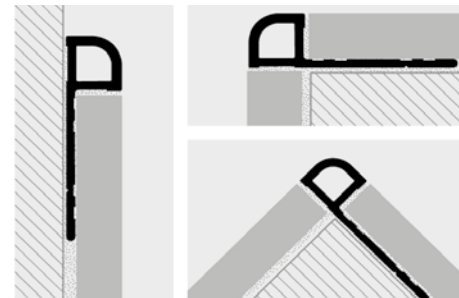

1. Choose "PROJOLLY QUART" according to the tile thickness and desired finish. 2. Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY QUART" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART.
CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY, TIMING AND PRICE.

CAPSULES, END CAPS and THREE-WAYS JOINTS

ANODIZED, POLISHED ALUMINIUM / PLASTIC

Capsules & end caps of the on demand profiles are also on demand *

CAPSULES and END CAPS - ANODIZED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTAA .../...	06/08/10/11/125/15	59,28	13,04
IPJQTAA .../...	06/08/10/11/125/15	59,28	13,04
TPJQTAA .../...	06/08/10/11/125/15	28,13	6,13
CPJQTAO .../...	06/08/10/11/125	59,28	13,04
IPJQTAO .../...	06/08/10/11/125	59,28	13,04
TPJQTAO .../...	06/08/10/11/125	28,13	6,13
CPJQTAT .../...	08/10/11/125	61,34	14,06
IPJQTAT .../...	08/10/11/125	61,34	14,06
TPJQTAT .../...	08/10/11/125	28,13	14,06
CPJQTBRA .../...	10/125	61,34	14,06
IPJQTBRA .../...	10/125	61,34	14,06
TPJQTBRA .../...	10/125	28,13	14,06

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJQTAA 10/10

CAPSULES and END CAPS - POLISHED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTBC .../...	06/08/10/11/125/15	59,28	13,04
IPJQTBC .../...	06/08/10/11/125/15	59,28	13,04
TPJQTBC .../...	06/08/10/11/125/15	28,13	5,81
CPJQTBO .../...	06/08/10/11/125	59,28	13,04
IPJQTBO .../...	06/08/10/11/125	59,28	13,04
TPJQTBO .../...	06/08/10/11/125	28,13	6,13
CPJQBT .../...	08/10/11/125	61,34	14,06
IPJQBT .../...	08/10/11/125	61,34	14,06
TPJQBT .../...	08/10/11/125	28,13	6,13

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJQTBC 10/10

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQT .../...	06/08/10/11/125/15	26,81	5,87

Choose the desired pack. & height
Ex.: 10 mm joint in 10 Pcs Pack - GIJQT 10/10



EXTERNAL CAPSULES
CPJQT... ..

INTERNAL CAPSULES
IPJQT... ..



END CAP
TPJQT... ..



JOINT
GIJQT... ..


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.


PROJOLLY QUART

BRUSHED POLISHED, BRUSHED AND VARNISHED ALUMINIUM

PROJOLLY QUART is a quarter-circle rounded bead profile in brushed and varnished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and (only brushed version) like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles. Its particular section and elegance, the availability in three finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY QUART** a much sought-after profile that allows an elegant workmanlike application.

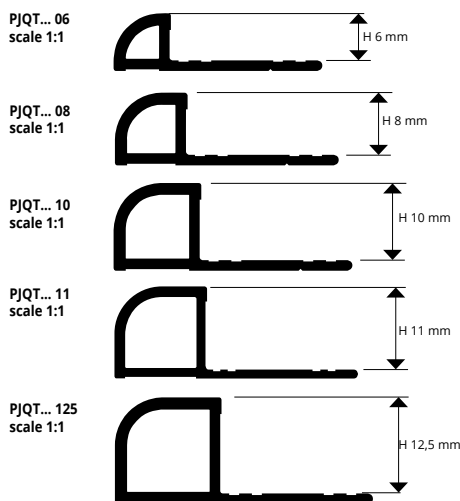

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

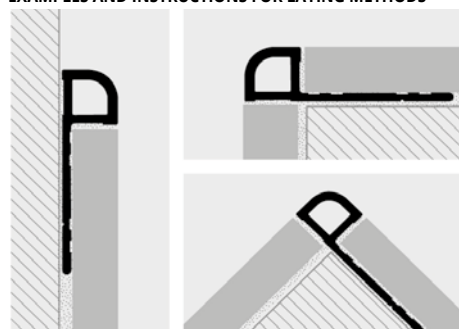

1. Choose "PROJOLLY QUART" according to the tile thickness and desired finish. 2. Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY QUART" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.




BRUSHED POLISHED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 12,5 mm, 15 mm - pack. 20 Pcs)

Article	H mm	€/lm	€/Pc
PJQTBS 08	8	10,08	27,22
PJQTBS 10	10	10,97	29,62
PJQTBS 11	11	11,57	31,24
PJQTBS 125	12,5	12,26	33,10
PJQTBS 08	8	10,08	27,22
PJQTBS 10	10	10,97	29,62
PJQTBS 11	11	11,57	31,24
PJQTBS 125	12,5	12,26	33,10

BRUSHED ANTIQUE BRONZE ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 12,5 mm, 15 mm - pack. 20 Pcs)

Article	H mm	€/lm	€/Pc
PJQTBRAS 10	10	10,16	27,43
PJQTBRAS 125	12,5	11,06	29,86

COLOURS



ON DEMAND MINIMUM QUANTITY 100 PCS



(Price to be agreed. Production delay 4/5 weeks)

ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY, TIMING AND PRICE.




VARNISHED ALUMINIUM thermo packed - bar length 2,7 M
pack. 20 Pcs - 54 lm (white colour 40 Pcs - 108 lm)

Article	H mm	€/lm	€/Pc
PJQTA 06-01	6	5,74	15,50
PJQTA 08-01	8	6,39	17,25
PJQTA 08-...	8	6,39	17,25
PJQTA 10-01	10	6,91	18,66
PJQTA 10-...	10	6,91	18,66
PJQTA 11-01	11	7,16	19,33
PJQTA 125-01	12,5	7,41	20,01


Available in the colours: 01. Available on demand 010 - 0106 - 02 - 03 - 11 - 17. The code of the selected colour must be added to the article code. E.g.: PJQTA 08... (chosen colour White) PJQTA 08-01.

COLOURS



For other colors than white in sizes 06, 11, 125, contact the sales office for quantities and prices

ON DEMAND MINIMUM QUANTITY 100 PCS

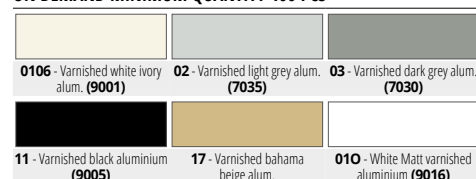

(Price to be agreed. Production delay 4/5 weeks)

CAPSULES, END CAPS and THREE-WAYS JOINTS

* Capsules & end caps of the on demand profiles are also on demand

POLISHED BRUSHED, VARNISHED ALUMINIUM/ PLASTIC

CAPSULES & CAPS - POLISHED BRUSHED ALUMINIUM


Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTBS .../...	08/10/11/125	69,07	14,68
IPJQTBS .../...	08/10/11/125	69,07	14,68
TPJQTBS .../...	08/10/11/125	28,13	6,13
CPJQTBS .../...	08/10/11/125	69,07	14,68
IPJQTBS .../...	08/10/11/125	69,07	14,68
TPJQTBS .../...	08/10/11/125	28,13	6,13
CPJQTBRAS .../...	10/125	69,07	14,68
IPJQTBRAS .../...	10/125	69,07	14,68
TPJQTBRAS .../...	10/125	28,13	14,06

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJQTBS 10/10

CAPSULES & CAP - VARNISHED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTA ...-.../...	06/08/10/11/125	60,73	13,36
IPJQTA ...-.../...	06/08/10/11/125	60,73	13,36
TPJQTA ...-.../...	06/08/10/11/125	28,13	5,81


Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJQTA 02-10/10

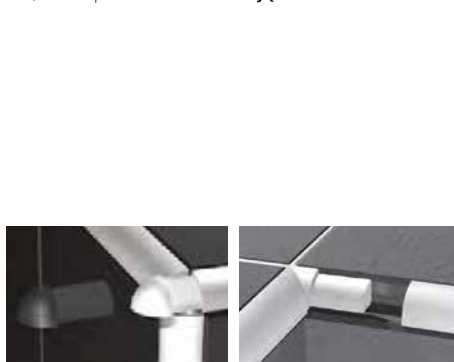

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQT .../...	06/08/10/11/125	26,81	5,87

Choose the desired pack. & height
Ex.: 10 mm joint in 10 Pcs Pack - GIJQT 10/10

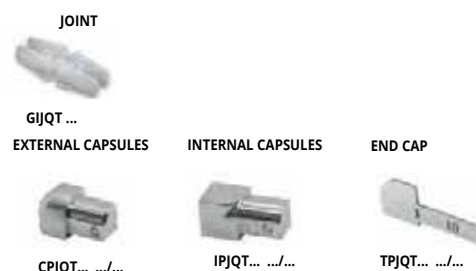

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOLLY QUART is a quarter-circle rounded bead profile in powder coated aluminum that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability of thirteen finishes and special pieces such as internal and external corners, junctions and end caps make **PROJOLLY QUART** an elegant and much-sought after profile.

PROJOLLY QUART

STONE LINE ALUMINIUM



STONE LINE ALUMINIUM thermo packed
bar length 2,7 M - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PJQTA 06-SL...	6	8,09	21,84
PJQTA 08-SL...	8	8,39	22,65
PJQTA 10-SL...	10	8,70	23,49
PJQTA 11-SL...	11	9,02	24,35
PJQTA 125-SL...	12,5	9,33	25,19

Available in the colours: SL01 - SL02 - SL03 - SL04 - SL05 - SL06 - SL07 - SL08 - SL09 - SL10 - SL11 - SL12 - SL13.


The code of the selected colour must be added to the article code.
E.g.: PJQTA 08... (chosen colour stone white) PJQTA 08-SL01.

COLOURS

STONE LINE						
SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greyivory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	SL07 - Stone antragray
SL08 - Stone antradark	SL09 - Stone bronze	SL10 - Stone corten	SL11 - Stone brown	SL12 - Stone black	SL13 - Stone oyster grey	

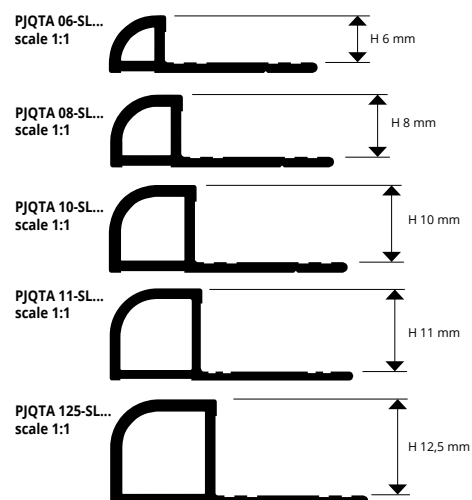

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

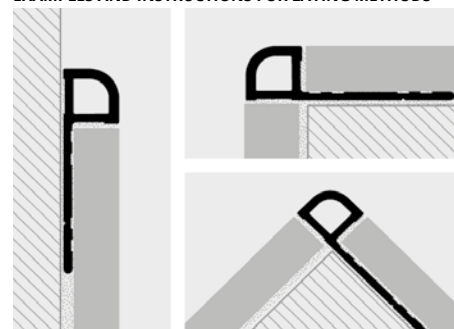

1. Choose "PROJOLLY QUART" according to the tile thickness and desired finish.
2. Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY QUART" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



CAPSULES, END CAPS and THREE-WAYS JOINTS

STONE LINE ALUMINIUM / PLASTIC

Capsules & end caps of the on demand profiles are also on demand *

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJQT .../...	06/08/10/ 11/125	26,81	5,87

Choose the desired pack. & height
Ex.: 10 mm joint in 10 Pcs Pack - GIJQT 10/10

END CAP
GIJQT .../...



CAPSULES & CAP - STONE LINE ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJQTA ...-SL.../...	06/08/10/ 11/125	71,48	15,73
IPJQTA ...-SL.../...	06/08/10/ 11/125	71,48	15,73
TPJQTA ...-SL.../...	06/08/10/ 11/125	46,00	10,12

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJQTA 10-SL06/10



EXTERNAL CAPSULES



INTERNAL CAPSULES



CPJQTA ...-SL.../...



IPJQTA ...-SL.../...



JOINT
TPJQT.../...

* = Production on demand with minimum quantity of 80 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOLLY QUART

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN

PROJOLLY QUART is a quarter-circle rounded bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability in different colours also on demand and special pieces such as internal and external corners make **PROJOLLY QUART** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

PJQT 08-
scale 1:1




PJQT 10-
scale 1:1



PJQT 125-
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

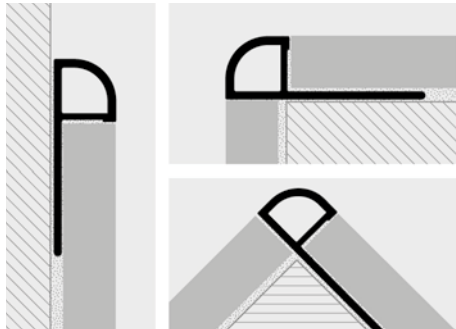

1. Choose "PROJOLLY QUART" according to the tile thickness and desired colour. 2. Cut "PROJOLLY QUART" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY QUART" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.



NON-TOXIC SHOCKPROOF VINYL RESIN

bar length 2,7 lm - pack 54 lm (white colour pack 108 lm)

Article	H mm	€/lm	€/Pc
PJQT 08-...	8	1,31	3,54
PJQT 10-...	10	1,43	3,86
PJQT 125-...	12,5	1,55	4,19

Available in the colours: 00-01-02-03-05-06-11-17-18.

Available on demand 0106 - 04 - 07 - 08 - 09 - 10-12-13-14-15-16-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PJQT 08-... (chosen colour white) PJQT 08-01.

WHITE NOT FOR SALE SINGLY

COLOURS

00 - White ice	01 - White	02 - Light grey	03 - Cement gray	05 - Dark beige	06 - Ivory
11 - Black	17 - Bahama beige	18 - Grey			

ON DEMAND - MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

0106 - White ivory	04 - Light beige	07 - Pink	08 - Sky blue	09 - Yellow	10 - Red
12 - Silver	13 - Gold	14 - Green	15 - Brown	16 - Blue	19 - Beige
20 - Dark ivory	21 - Light pink	22 - Dark pink	23 - Dark antique pink	24 - Dark sky blue	25 - Brick red
26 - Turquoise green	27 - Dark green	28 - Hazel brown	29 - Dark brown		

CAPSULES and THREE-WAYS JOINTS

POLYPROPYLENE/POLYETYLENE UV RESISTANT



POLYPROPYLENE/POLYETYLENE UV RESISTANT

Article	H mm	€/Pack. 20 Pcs	€/Pack. 5 Pcs
CPJQT 08-.../.../...	8	21,51	6,26
IPJQT 08-.../.../...	8	21,51	6,26
CPJQT 10-.../.../...	10	22,01	6,39
IPJQT 10-.../.../...	10	22,01	6,39
CPJQT 125-.../.../...	12,5	22,72	6,63
IPJQT 125-.../.../...	12,5	22,72	6,63

Available in the colours: 01-02-03-05-06-11-17-18 (available on demand 0106-04-07-08-09-10-12-13-14-15-16-19-20-21-22-23-24-25-26-27-28-29). The code of the selected colour must be added to the article code. E.g.: CPJQT 08-.../.../... (chosen colour white) CPJQT 08-01/20.

EXTERNAL CAPSULES



CPJQT ...-.../.../...

INTERNAL CAPSULES



IPJQT ...-.../.../...



PROJOLLY is a rounded bead profile in polished, super polished, sanded and brushed stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PROJOLLY

POLISHED, SUPER POLISHED, SANDED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PJAC 06	6	11,50	31,05
PJAC 08	8	12,26	33,10
PJAC 10	10	13,22	35,69
PJAC 11	11	13,78	37,21
PJAC 125	12,5	14,18	38,29
PJAC 15	15	15,83	42,74

SUPER POLISHED STAINLESS ST. AISI 304/1.4301-V2A
thermo packed - bar length 2,7 lm - pack. 20 Pcs
54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PJACML 06	6	14,31	38,64
PJACML 08	8	15,07	40,69
PJACML 10	10	16,10	43,47
PJACML 11	11	16,54	44,66
PJACML 125	12,5	16,93	45,71
PJACML 15	15	18,52	50,00



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PJACS 06	6	13,79	37,23
PJACS 08	8	14,56	39,31
PJACS 10	10	15,59	42,09
PJACS 11	11	16,11	43,50
PJACS 125	12,5	16,48	44,50
PJACS 15	15	18,13	48,95


SANDED STAINLESS INOX AISI 304/1.4301-V2A with protective film
bar length 2,7 ml - pack. 20 Pcs 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PJACSB 08	8	15,57	42,04
PJACSB 10	10	16,60	44,82
PJACSB 125	12,5	17,57	47,44


COLOURS

AC - Polished stainless st. AISI 304/1.4301-V2A	ACML - Super polished stainless st. AISI 304/1.4301-V2A	ACS - Brushed stainless st. AISI 304/1.4301-V2A
ACSB - Sanded stainless st. AISI 304/1.4301-V2A		

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

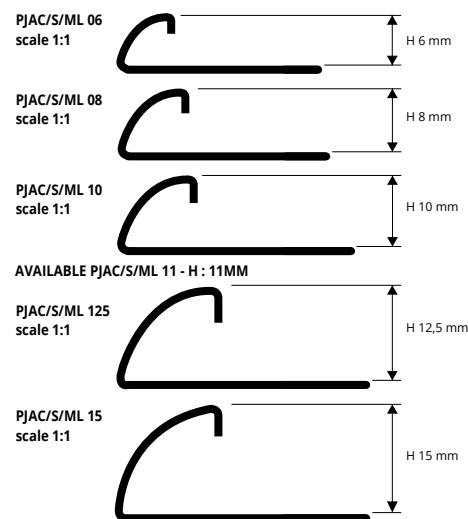

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

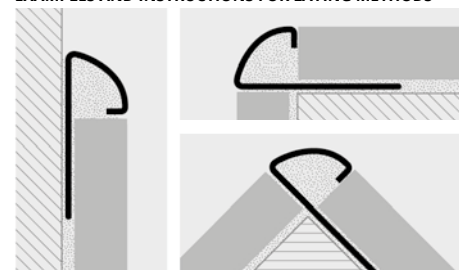

1. Choose "PROJOLLY" according to the tile thickness and desired finish. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS ST. AISI 304/1.4301-V2A / PLASTIC

Capsules & end caps of the on demand profiles are also on demand *

CAPSULES and END CAPS - POLISHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJAC 06/...	6	140,19	30,66
IPJAC 06/...	6	140,19	30,66
CPJAC 08/...	8	146,83	31,94
IPJAC 08/...	8	146,83	31,94
CPJAC 10/...	10	157,70	33,20
IPJAC 10/...	10	157,70	33,20
CPJAC 11/...	11	164,82	34,48
IPJAC 11/...	11	164,82	34,48
CPJAC 125/...	12,5	171,10	35,76
IPJAC 125/...	12,5	171,10	35,76
CPJAC 15/...	15	185,23	38,96
IPJAC 15/...	15	185,23	38,96
TPJAC 06-08-10-11-125-15-.../...		28,13	6,13

Choose the desired packaging: E.g.: CPJAC .../10 (Pack. 10 Pcs)
CPJAC .../2 (Pack. 2 Pcs)

CAPSULES and END CAPS - BRUSHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJACS 06/...	6	154,56	31,94
IPJACS 06/...	6	154,56	31,94
CPJACS 08/...	8	159,76	33,20
IPJACS 08/...	8	159,76	33,20
CPJACS 10/...	10	169,89	35,12
IPJACS 10/...	10	169,89	35,12
CPJACS 11/...	11	175,93	36,73
IPJACS 11/...	11	175,93	36,73
CPJACS 125/...	12,5	181,37	38,31
IPJACS 125/...	12,5	181,37	38,31
CPJACS 15/...	15	197,90	41,52
IPJACS 15/...	15	197,90	41,52
TPJACS 06-08-10-11-125-15-.../...		28,13	6,13

Choose the desired packaging: E.g.: CPJACS .../10 (Pack. 10 Pcs)
CPJACS .../2 (Pack. 2 Pcs)

CAPSULES - SUPER POLISHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJACML 06/...	6	154,56	31,94
IPJACML 06/...	6	154,56	31,94
CPJACML 08/...	8	159,76	33,20
IPJACML 08/...	8	159,76	33,20
CPJACML 10/...	10	169,89	35,12
IPJACML 10/...	10	169,89	35,12
CPJACML 11/...	11	175,93	36,73
IPJACML 11/...	11	175,93	36,73
CPJACML 125/...	12,5	181,37	38,31
IPJACML 125/...	12,5	181,37	38,31
CPJACML 15/...	15	197,90	41,52
IPJACML 15/...	15	197,90	41,52

Choose the desired packaging: E.g.: CPJACML .../10 (Pack. 10 Pcs)
CPJACML .../2 (Pack. 2 Pcs)

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJAC 06/...	6	26,81	5,87
GIJAC 08/...	8	26,81	5,87
GIJAC 10/...	10	26,81	5,87
GIJAC 11/...	11	26,81	5,87
GIJAC 125/...	12,5	26,81	5,87
GIJAC 15/...	15	26,81	5,87

Choose the desired packaging: E.g.: GIJAC .../10 (Pack. 10 Pcs)
GIJAC .../2 (Pack. 2 Pcs)

CAPSULES - SANDED STAINLESS INOX AISI 304/1.4301-V2A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJACSB 08/...	8	177,39	37,25
IPJACSB 08/...	8	177,39	37,25
CPJACSB 10/...	10	187,52	39,38
IPJACSB 10/...	10	187,52	39,38
CPJACSB 125/...	12,5	204,67	42,99
IPJACSB 125/...	12,5	204,67	42,99



END CAP TPJ... .../... EXTERNAL CAPSULES CPJ... .../... INTERNAL CAPSULES IPJ... .../... JOINT GIJAC .../...


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOLLY

POLISHED STAINLESS STEEL INOX AISI 316LL/1.4404-V4A

PROJOLLY is a rounded bead profile in polished stainless steel INOX AISI 316LL/1.4404-V4A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical and chemical stresses.

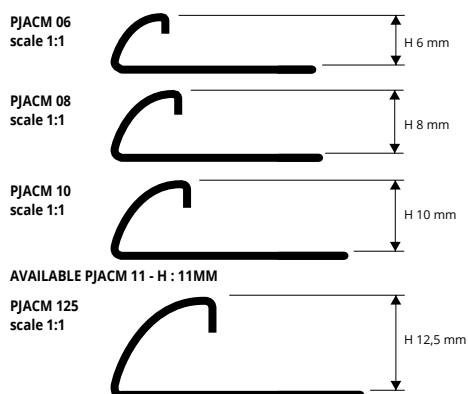

EXAMPLES OF LAYING



POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A with protective film

- bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm



Article	H mm	€/lm	€/Pc
PJACM 06	6	14,44	38,99
PJACM 08	8	15,52	41,90
PJACM 10	10	16,66	44,98
PJACM 11	11	17,36	46,87
PJACM 125	12,5	17,77	47,98

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.



COLOURS



1. Choose "PROJOLLY" according to the tile thickness. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES and THREE-WAYS JOINTS

POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A



POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJACM 06/...	6	167,23	35,12
IPJACM 06/...	6	167,23	35,12
CPJACM 08/...	8	173,75	36,40
IPJACM 08/...	8	173,75	36,40
CPJACM 10/...	10	181,37	38,31
IPJACM 10/...	10	181,37	38,31
CPJACM 11/...	11	187,76	39,61
IPJACM 11/...	11	187,76	39,61
CPJACM 125/...	12,5	194,17	40,88
IPJACM 125/...	12,5	194,17	40,88

Choose the desired packaging: E.g.: CPJACM .../10 (Pack. 10 Pcs)
CPJACM .../2 (Pack. 2 Pcs)

EXTERNAL CAPSULES



CPJACM .../...

INTERNAL CAPSULES




IPJACM .../...


PROTERMINAL

POLISHED STAINLESS STEEL INOX AISI 316LL/1.4404-V4A

PROTERMINAL is a "L-shaped" profile in polished stainless steel INOX AISI 316LL/1.4404-V4A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor coverings. Its particular section and the availability in three different heights make **PROTERMINAL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical and chemical stresses.

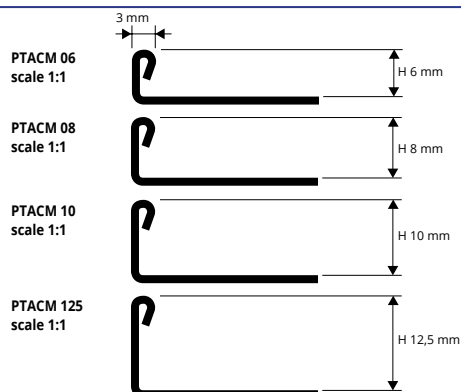

EXAMPLES OF LAYING

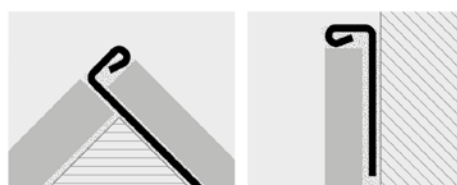

COLOURS



1. Choose "PROTERMINAL" according to the tile thickness. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm



Article	H mm	€/lm	€/Pc
PTACM 06	6	10,97	29,62
PTACM 08	8	11,25	30,38
PTACM 10	10	11,82	31,91
PTACM 125	12,5	13,03	35,18

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROJOLLY is a rounded bead profile in natural, antique brass, polished varnished and chromed brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like (only natural and chromed version) a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

PROJOLLY

NATURAL, POLISHED VARNISHED,
CHROMED AND ANTIQUE BRASS



PJO... 06
scale 1:1



PJO... 08
scale 1:1




PJO... 10
scale 1:1



PJO... 125
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

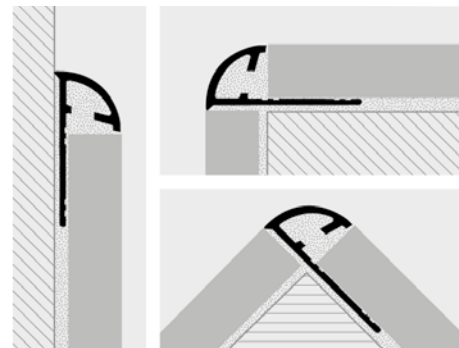

1. Choose "PROJOLLY" according to the tile thickness and desired finish. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

NATURAL BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PJON 08	8	15,07	40,69 *
PJON 10	10	16,01	43,23
PJON 125	12,5	17,80	48,06 *

SUPER POLISHED VARNISHED CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PJOC 06	6	20,74	56,00 *
PJOC 08	8	23,31	62,94
PJOC 10	10	24,47	66,07
PJOC 125	12,5	25,46	68,74

MIRROR
LINE

POLISHED VARNISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PJOL 06	6	18,95	51,16 *
PJOL 08	8	19,69	53,16
PJOL 10	10	21,68	58,54
PJOL 125	12,5	24,73	66,77

Polished varnished brass is not suitable for frequent pedestrian traffic places and/or scratching.

ANTIQUÉ BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PJOB 08	8	30,45	82,22 *
PJOB 10	10	33,23	89,72
PJOB 125	12,5	36,17	97,66

COLOURS



CAPSULES, END CAPS and THREE-WAYS JOINTS

VARNISHED POLISHED BRASS AND CHROMED BRASS EFFECT / PLASTIC

Capsules & end caps of the on demand profiles are also on demand *

CAPS and JOINTS - CHROMED BRASS / PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
TPJOC 06-08-10-125/...	6-8-10-12,5	27,41	6,13
GIJA 06-08-10-125/...	6-8-10-12,5	26,81	5,87

Choose the desired packaging: E.g.: GIJA.../10 (Pack. 10 Pcs)
GIJA.../2 (Pack. 2 Pcs)

END CAP



TPJOC .../...

JOINT



GIJA .../...

EXTERNAL CAPSULES



CPJ... .../...

CPJD... .../...

INTERNAL CAPSULES



IPJD... .../...

IPJ... .../...

LEFT CAPSULES - POLISHED VARNISHED/CHROMED BRASS

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJOL/OC 06/...	6	183,91	40,88
IPJOL/OC 06/...	6	210,83	45,98
CPJOL/OC 08/...	8	187,16	41,52
IPJOL/OC 08/...	8	213,97	46,62
CPJOL/OC 10/...	10	190,30	42,16
IPJOL/OC 10/...	10	216,50	47,26
CPJOL/OL 125/...	12,5	194,78	43,44
IPJOL/OC 125/...	12,5	220,97	47,90

Choose the desired packaging: E.g.: CPJOL.../10 (Pack. 10 Pcs)
CPJOL.../2 (Pack. 2 Pcs)

The right capsules are available on demand and must be used only in the following cases:

A) when you are laying the cut base of the profile perpendicularly on the floor;

B) as an alternative to end-caps (right side).



Add "D" to the article code.
For example: CPJDOL 06.



Add "D" to the article code.
For example: IPJDOL 06.

LEFT CAPSULES - ANTIQUE BRASS

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJOB 08/...	8	252,72	56,14
IPJOB 08/...	8	288,95	63,39
CPJOB 10/...	10	247,41	57,35
IPJOB 10/...	10	292,33	64,00
CPJOB 125/...	12,5	253,21	58,68
IPJOB 125/...	12,5	298,37	64,72

Choose the desired packaging: E.g.: CPJOB.../10 (Pack. 10 Pcs)
CPJOB.../2 (Pack. 2 Pcs)



LEFT CAPSULES




RIGHT CAPSULES

Add "D" to the article code. For example: CPJDOL 06.

PROJOLLY

ANODIZED ALUMINIUM
SILVER, COPPER, TITANIUM, GOLD AND BLACK

PROJOLLY is a rounded bead profile in anodized aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and elegance, the availability in five different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

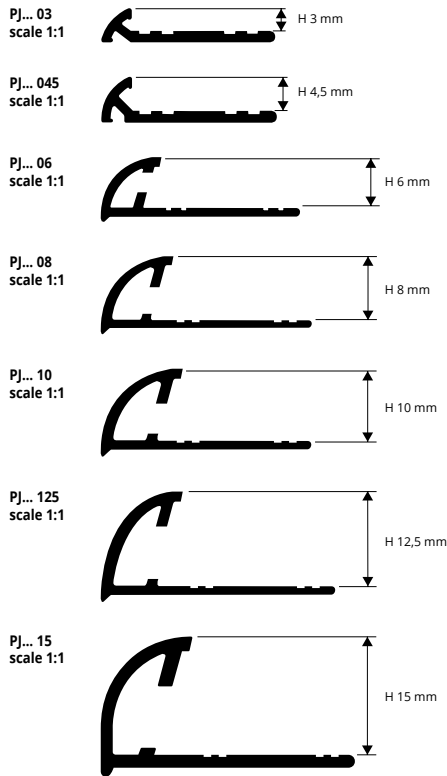


COLOURS

ANODIZED				
AA - Anodized silver alum.	AR - Anodized copper alum.	AT - Anodized titanium alum.	AO - Anodized gold alum.	NE - Anodized black alum.



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

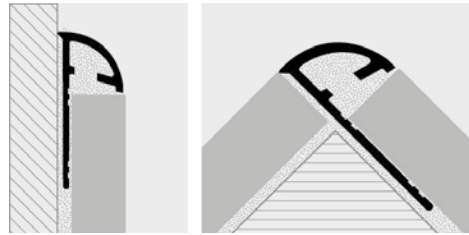

1. Choose "PROJOLLY" according to the tile thickness and desired finish. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



ANODIZED ALUM. (silver-copper-gold-titanium-black) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm
(for H 15 anodized silver alum. pack. 20 Pcs - 54 lm)

Article	H mm	€/lm	€/Pc	
PJAA 03	3	4,41	11,91	*
PJAA 045	4,5	4,66	12,58	*
PJAA 06	6	4,99	13,47	
PJAA 08	8	5,30	14,31	
PJAA 10	10	5,72	15,44	
PJAA 125	12,5	6,46	17,44	
PJAA 15	15	7,21	19,47	
PJAO 03	3	4,41	11,91	*
PJAO 045	4,5	4,66	12,58	*
PJAO 06	6	4,99	13,47	*
PJAO 08	8	5,30	14,31	
PJAO 10	10	5,72	15,44	
PJAO 15	15	7,21	19,47	*
PJAR 08	8	5,72	15,44	
PJAR 10	10	6,36	17,17	
PJAR 125	12,5	7,16	19,33	*
PJAT 08	8	5,72	15,44	
PJAT 10	10	6,36	17,17	
PJAT 125	12,5	7,16	19,33	
PJNE 08	8	7,60	20,52	
PJNE 10	10	8,28	22,36	
PJNE 125	12,5	9,31	25,14	

CAPSULES, END CAPS and THREE-WAYS JOINTS

* Capsules & end caps of the on demand profiles are also on demand

Anodized ALUMINIUM (silver, copper, titanium, gold and black) / PLASTIC

LEFT CAPSULES ANODIZED ALUMINIUM (silver, copper, titanium and gold)

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJAA .../...	06/08/10/125	59,28	13,04
CPJAA 15/...	15	65,80	14,48
IPJAA .../...	06/08/10/125	59,28	12,26
IPJAA 15/...	15	68,94	15,16
TPJAA .../...	06/08/10/125/15	28,13	6,13
CPJAO .../...	06/08/10	59,28	13,04
CPJAO 15/...	15	65,80	14,48
IPJAO .../...	06/08/10	59,28	12,26
IPJAO 15/...	15	68,94	15,16
TPJAO .../...	06/08/10/15	28,13	6,13
CPJAR .../...	08/10/125	61,34	14,06
IPJAR .../...	08/10/125	61,34	14,06
TPJAR .../...	08/10/125	28,13	6,13
CPJAT .../...	08/10/125	61,34	14,06
IPJAT .../...	08/10/125	61,34	14,06
TPJAT .../...	08/10/125	28,13	6,13
CPJNE .../...	08/10/125	79,70	17,54
IPJNE .../...	08/10/125	79,70	17,54
TPJNE .../...	08/10/125	28,13	6,13

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJAA 10/10

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJA .../...	06/08/10/ 125/15	26,81	5,87

Choose the desired pack. & height
Ex.: 10 mm joint in 10 Pcs Pack - GIJA 10/10

EXTERNAL CAPSULES



INTERNAL CAPSULES



CAPS



JOINTS



The right capsules are available on demand and must be used only in the following cases:

A) when you are laying the cut base of the profile perpendicularly on the floor;



Add "D" to the article code. For example: CPJDAA 06.

Add "D" to the article code. For example: IPJDAA 06.

B) as an alternative to end-caps (right side).



LEFT CAPSULES

RIGHT CAPSULES

Add "D" to the article code. For example: CPJDAA 06.

PROJOLLY is a rounded bead profile in polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and elegance, the availability in five different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

PROJOLLY


POLISHED ALUMINIUM
CHROME, COPPER, TITANIUM, GOLD AND BLACK



POLISHED ALUMINIUM (chrome-copper-titanium-gold-black)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm (H 15 mm - 54 lm)

Article	H mm	€/lm	€/Pc
PJBC 03	3	7,70	20,79
PJBC 045	4,5	7,92	21,38
PJBC 06	6	8,12	21,92
PJBC 08	8	8,75	23,63
PJBC 10	10	9,71	26,22
PJBC 125	12,5	10,97	29,62
PJBC 15	15	11,95	32,27
PJBO 03	3	7,70	20,79
PJBO 045	4,5	7,92	21,38
PJBO 06	6	8,12	21,92
PJBO 08	8	8,75	23,63
PJBO 10	10	9,71	26,22
PJBO 125	12,5	9,71	26,22
PJBR 08	8	8,75	23,63
PJBR 10	10	9,71	26,22
PJBR 125	12,5	9,71	26,22
PJBT 08	8	8,75	23,63
PJBT 10	10	9,71	26,22
PJBT 125	12,5	9,71	26,22
PJBN 08	8	11,36	30,67
PJBN 10	10	11,94	32,24
PJBN 125	12,5	12,75	34,43

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

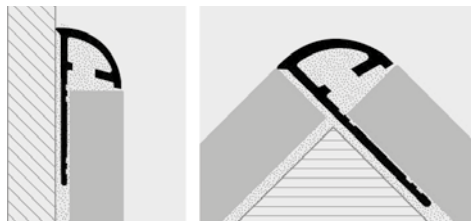

1. Choose "PROJOLLY" according to the tile thickness and desired finish. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS

POLISHED				
BC - Polished chrome alum.	BR - Polished copper alum.	BT - Polished titanium alum.	BO - Polished gold alum.	BN - Polished black alum.

PJ... 03 scale 1:1		H 3 mm
PJ... 045 scale 1:1		H 4,5 mm
PJ... 06 scale 1:1		H 6 mm
PJ... 08 scale 1:1		H 8 mm
PJ... 10 scale 1:1		H 10 mm
PJ... 125 scale 1:1		H 12,5 mm
PJBC 15 scale 1:1		H 15 mm

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED ALUMINIUM (chrome, copper, titanium, gold, black) / PLASTIC

Capsules & end caps of the on demand profiles are also on demand *

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJA .../...	06/08/10/ 125/15	26,81	5,87

Choose the desired pack. & height
Ex: 10 mm joint in 10 Pcs Pack - GIJA 10/10

END CAP



TPJ... ..

JOINT



GIJA .../...

EXTERNAL CAPSULES



CPJ... ..



CPJD... ..

INTERNAL CAPSULES



IPJ... ..



IPJD... ..

LEFT CAPSULES POLISHED ALUMINIUM chrome, copper, titanium and gold

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJBC .../...	06/08/10/125	59,28	13,04
CPJBC 15/...	15	65,80	14,48
IPJBC .../...	06/08/10/125	59,28	12,26
IPJBC 15/...	15	68,94	15,16
TPJBC .../...	06/08/10/125/15	28,13	6,13
CPJBO .../...	06/08/10/125	59,28	13,04
IPJBO .../...	06/08/10/125	59,28	12,26
TPJBO .../...	06/08/10/15	28,13	6,13
CPJBR .../...	08/10/125	86,82	23,50
IPJBR .../...	08/10/125	86,82	23,50
TPJBR .../...	08/10/125	28,13	6,13
CPJBT .../...	08/10/125	61,34	14,06
IPJBT .../...	08/10/125	61,34	14,06
TPJBT .../...	08/10/125	28,13	6,13
CPJBN .../...	08/10/125	112,78	24,81
IPJBN .../...	08/10/125	112,78	24,81
TPJBN .../...	08/10/125	28,13	6,13

Choose the desired pack. & height
Ex: 4,5 mm capsule in 10 Pcs Pack - CPJBC 10/10

(*) 12,5/15 mm NOT SUITABLE FOR THREE-WAYS CORNER

The right capsules are available on demand and must be used only in the following cases:
A) when you are laying the cut base of the profile perpendicularly on the floor;




Add "D" to the article code.
For example: CPJDBC 06.



Add "D" to the article code.
For example: IPJDBC 06.

B) as an alternative to end-caps (right side).



LEFT CAPSULES
RIGHT CAPSULES
Add "D" to the article code. For example: CPJDBC 06.


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.


PROJOLLY

BRUSHED ALUMINIUM

PROJOLLY is a rounded bead profile in brushed aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and elegance, the availability in four different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

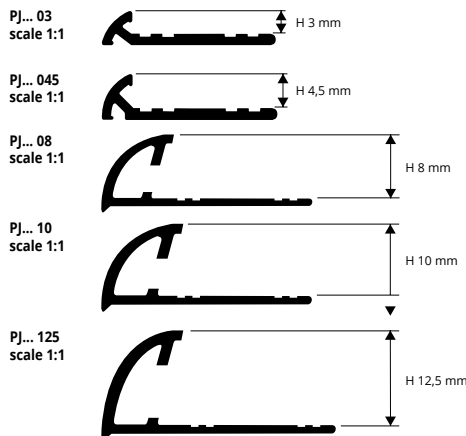

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

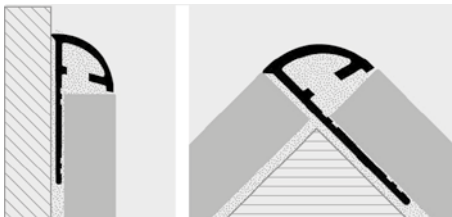

1. Choose "PROJOLLY" according to the tile thickness and desired finish. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



BRUSHED POLISHED ALUMINIUM (silver-gold-copper-titanium-black)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PJBS 03	3	9,07	24,49
PJBS 045	4,5	9,40	25,38
PJBS 08	8	10,08	27,22
PJBS 10	10	10,97	29,62
PJBS 125	12,5	12,26	33,10
PJRS 03	3	9,07	24,49
PJRS 045	4,5	9,40	25,38
PJRS 08	8	10,08	27,22
PJRS 10	10	10,97	29,62
PJRS 125	12,5	12,26	33,10
PJBOS 03	3	9,07	24,49
PJBOS 045	4,5	9,40	25,38
PJBOS 08	8	10,08	27,22
PJBOS 10	10	10,97	29,62
PJBOS 125	12,5	12,26	33,10
PJTS 03	3	9,07	24,49
PJTS 045	4,5	9,40	25,38
PJTS 08	8	10,08	27,22
PJTS 10	10	10,97	29,62
PJTS 125	12,5	12,26	33,10
PJNS 08	8	12,81	34,59
PJNS 10	10	13,93	37,61
PJNS 125	12,5	15,79	42,63



COLOURS

BRUSHED POLISHED		
BS - Brushed polished silver alum. RS - Brushed polished copper alum. TS - Brushed polished titanium alum.		
NS - Brushed polished black alum.		

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height

BRUSHED POLISHED	
BOS - Brushed gold alum.	

(Price to be agreed. Production delay 4/5 weeks)

CAPSULES, END CAPS and THREE-WAYS JOINTS

* Capsules & end caps of the on demand profiles are also on demand

BRUSHED POLISHED ALUMINIUM (silver, copper, titanium, black) / PLASTIC

LEFT CAPSULES - BRUSHED POLISHED ALUMINIUM

silver-gold-copper-titanium-black

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJBS .../...	08/10/125	69,07	14,68
IPJBS .../...	08/10/125	69,07	14,68
TPJBS .../...	08/10/125	28,13	6,13
CPJBOS .../...	08/10/125	69,07	14,68
IPJBOS .../...	08/10/125	69,07	14,68
TPJBOS .../...	08/10/125	28,13	6,13
CPJRS .../...	08/10/125	69,07	14,68
IPJRS .../...	08/10/125	69,07	14,68
TPJRS .../...	08/10/125	28,13	6,13
CPJTS .../...	08/10/125	69,07	14,68
IPJTS .../...	08/10/125	69,07	14,68
TPJTS .../...	08/10/125	28,13	6,13
CPJNS .../...	08/10/125	88,87	19,56
IPJNS .../...	08/10/125	88,87	19,56
TPJNS .../...	08/10/125	28,13	6,13

Choose the desired pack. & height
Ex: 4,5 mm capsule in 10 Pcs Pack - CPJBS 10/10

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJA .../...	08/10/125	26,81	5,87

Choose the desired pack. & height
Ex: 10 mm joint in 10 Pcs Pack - GIJA 10/10

EXTERNAL CAPSULES



CPJ... .../...



CPJD... .../...

INTERNAL CAPSULES



IPJ... .../...



IPJD... .../...

The right capsules are available on demand and must be used only in the following cases:
A) when you are laying the cut base of the profile perpendicularly on the floor;



Add "D" to the article code. For example: CPJDBS 08.



Add "D" to the article code. For example: IPJDBS 08.

B) as an alternative to end-caps (right side).



LEFT CAPSULES
Add "D" to the article code. For example: CPJDBS 08.

RIGHT CAPSULES

END CAP



TPJ... .../...

JOINT



GIJA .../...

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOLLY is a rounded bead profile in varnished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and elegance, the availability in five different colours and special pieces such as internal and external corners, end caps and joints make **PROJOLLY** a much sought-after and elegant profile that allows a workmanlike application.

PROJOLLY

VARNISHED ALUMINIUM



VARNISHED ALUMINIUM (HOT-WORKED 200°) thermo packed
bar length 2,7 lm - pack. 20 Pcs 54 lm (colour white 40 Pcs - 108 lm)

Article	H mm	€/lm	€/Pc
PJA 06-01	6	5,74	15,50
PJA 08-...	8	6,39	17,25
PJA 10-...	10	6,91	18,66
PJA 125-01	12,5	7,41	20,01


With H 8 and 10 mm available in the colours: 01 - 0106 - 0311 - 06 - 11
Available on demand: 010 - 02-03-0211-10-17.
The code of the selected colour must be added to the article code.
E.g.: PJA 08... (chosen colour white) PJA 08-01.

COLOURS


01 - Varnished white alum. (9016)	0106 - Varnished white Ivory alum. (9001)	0311 - Varnished asphalt grey alum. (7043)
06 - Varnished ivory alum. (1015)	11 - Varnished black alum. (9005)	

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height
(Price to be agreed. Production delay 4/5 weeks)

010 - Varnished white matt alum. (9016)	02 - Varnished light grey alum. (7035)	03 - Varnished stone grey alum. (7030)
0211 - Varnished quartz grey alum. (7039)	10 - Varnished klinker red alum. (8004)	17 - Varnished bahama beige alum.

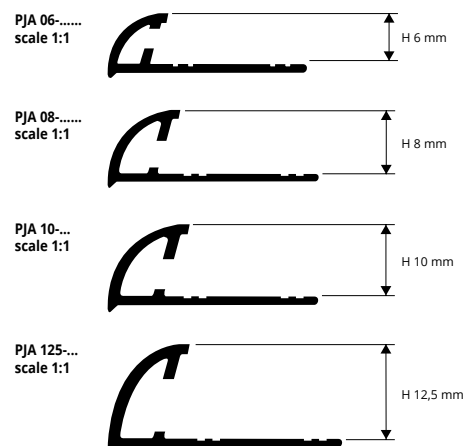

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal quantity, timing and price.

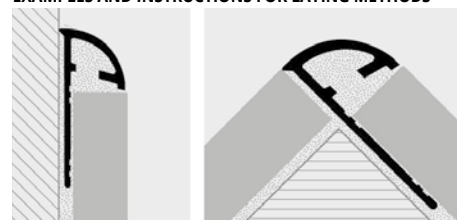EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROJOLLY" according to the tile thickness and desired colour. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS

VARNISHED ALUMINIUM / PLASTIC

Capsules & end caps of the on demand profiles are also on demand

LEFT CAPSULES VARNISHED ALUMINIUM (HOT-WORKED 200°)

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJA .../.../...	08/10/125	60,73	13,36
IPJA .../.../...	08/10/125	60,73	13,36
TPJA .../.../...	08/10/125	28,13	6,13

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJA 10-06/10 10/10

EXTERNAL CAPSULES**INTERNAL CAPSULES****JOINTS - PLASTIC**

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GJJA .../...	08/10/125	26,81	5,87

Choose the desired pack. & height
Ex.: 10 mm joint in 10 Pcs Pack - GJJA 10/10

END CAP**JOINT**

The right capsules are available on demand and must be used only in the following cases:

A) when you are laying the cut base of the profile perpendicularly on the floor;



Add "D" to the article code. For example: CPJDA 06-01. Add "D" to the article code. For example: IPJDA 06-01.

B) as an alternative to end-caps (right side).


**LEFT CAPSULES****RIGHT CAPSULES**

Add "D" to the article code. For example: CPJDA 06-01.


PROJOLLY

SHOCKPROOF NON - TOXIC
COLORED VINYL RESIN

PROJOLLY is a rounded bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability in different colours also on demand and special pieces such as internal and external corners make **PROJOLLY** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

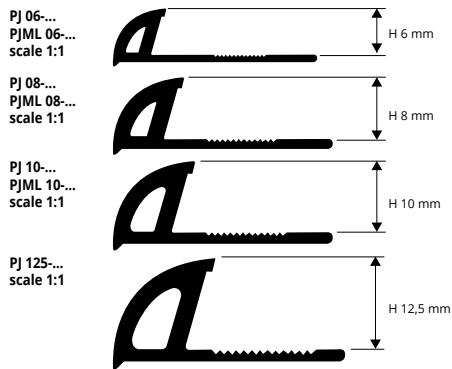

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

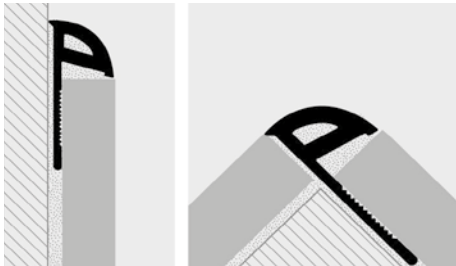

1. Choose "PROJOLLY" according to the tile thickness and desired colour. 2. Cut "PROJOLLY" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

NON-TOXIC SHOCKPROOF VINYL RESIN

bar length 2,7 lm - pack. 54 lm (colour white pack. 108 lm)

Article	H mm	€/lm	€/Pc
PJ 06-...	6	1,18	3,19
PJ 08-...	8	1,31	3,54
PJ 10-...	10	1,43	3,86
PJ 125-...	12,5	1,55	4,19

Available in the colours: 00 - 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 11 - 12 - 13 - 14 - 15 - 17 - 18 - 0106.
Available on demand 10 - 16 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 with a minimum quantity order of 800 pcs.
The code of the selected colour must be added to the article code.
E.g.: PJ 06... (chosen colour white) PJ 06-01.

WHITE NOT FOR SALE SINGLY

NON-TOXIC SHOCKPROOF VINYL RESIN

MIRROR LINE EXTRA POLISHED - bar length 2,7 lm
pack. 54 lm (colour white pack. 108 lm)

Article	H mm	€/lm	€/Pc
PJML 06-00/01	6	1,46	3,94
PJML 06-...	6	1,46	3,94
PJML 08-00/01	8	1,59	4,29
PJML 08-...	8	1,59	4,29
PJML 10-00/01	10	1,71	4,62
PJML 10-...	10	1,71	4,62
PJML 125-00/01	12,5	1,85	5,00
PJML 125-...	12,5	1,85	5,00

available in the color: 01 - 00 (Available on demand 0106-02-03-04-05-07-08-09-10-11-14-15-16-17-0106-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs.)
The code of the selected colour must be added to the article code.
E.g.: PJ 06... (chosen colour white) PJ 06-01.
Prices per metre are approximate. Articles not for sale singly.

WHITE NOT FOR SALE SINGLY

COLOURS

00 - White ice	01 - White	0106 - White ivory	02 - Light grey	03 - Cement gray
04 - Light beige	05 - Dark beige	06 - Ivory	07 - Pink	08 - Sky Blue
09 - Yellow	11 - Black	12 - Silver	13 - Gold	14 - Green
15 - Brown	17 - Bahama beige	18 - Grey		

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height
(Price to be agreed. Production delay 4/5 weeks)

10 - Red	16 - Blue	19 - Beige	20 - Dark ivory
21 - Light pink	22 - Dark pink	23 - Dark antique pink	24 - Dark sky blue
25 - Brick red	26 - Turquoise green	27 - Dark green	28 - Hazel brown
29 - Dark brown			

CAPSULES for three-ways joints

POLYPROPYLENE/POLYETHYLENE UV RESISTANT

* Capsules & end caps of the on demand profiles are also on demand

POLYPROPYLENE / POLYETHYLENE UV RESISTANT

Article	H mm	€/Pack. 20 pcs	€/Pack. 5 pcs
CPJ 06-.../...	6	21,03	6,30
IPJ 06-.../...	6	21,03	6,30
CPJ 08-.../...	8	21,49	6,39
IPJ 08-.../...	8	21,49	6,39
CPJ 10-.../...	10	21,98	6,57
IPJ 10-.../...	10	21,98	6,57
CPJ 125-.../...	12,5	22,70	6,78
IPJ 125-.../...	12,5	22,70	6,78

Available in the colours: 01-02-03-04-05-06-07-08-09-10-11-12-13-14-15-16-17-18-0106 (not available 19-20-21-22-23-24-25-26-27-28-29).
The code of the selected colour must be added to the article code.
E.g.: CPJ 06-.../... (chosen colour white) CPJ 06-01/20.

EXTERNAL CAPSULES



CPJ ...-.../...

INTERNAL CAPSULES



IPJ ...-.../...



* = Production on demand with minimum quantity of 800 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOLLY MARBLE is a rounded bead profile in shockproof non - toxic marbled vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability of different marble effect finishes also on demand and special pieces such as internal and external corners make **PROJOLLY MARBLE** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

PROJOLLY MARBLE

SHOCKPROOF NON - TOXIC
MARBLED VINYL RESIN



PJ...06
scale 1:1



PJ...08
scale 1:1



PJ...10
scale 1:1



PJ...125
scale 1:1



MARBLED NON-TOXIC VINYL RESIN
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PJ... 06	6	2,19	5,91 *
PJ... 08	8	2,51	6,78
PJ... 10	10	2,72	7,34
PJ... 125	12,5	2,96	7,99


Available on demand MC - MB - MR - MA - MV - MVA - MAS - MBS - MRS - MVAS - MTC - MTS (MAB - MBC - MBO - MAM - MBD - MCRI - MCRC - MBDX - MGVC - MNA - MBPS - MVBL with a minimum quantity order of 800 pcs).

The code of the selected colour must be added to the article code. E.g.: PJ... 10 (chosen colour carrara) PJMC 10.

INSTRUCTIONS FOR LAYING

1. Choose "PROJOLLY MARBLE" according to the tile thickness and desired colour. 2. Cut "PROJOLLY MARBLE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY MARBLE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

EXAMPLES OF LAYING

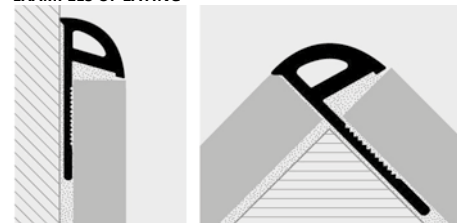

COLOURS

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

PROJOLLY OPEN is a rounded bead profile in shockproof non - toxic marbled vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular open section and the availability in white colour make **PROJOLLY OPEN** a practical and economic profile. It can be used where low cost and workmanlike application are required.

PROJOLLY OPEN

SHOCKPROOF NON - TOXIC
WHITE VINYL RESIN



WHITE VINYL RESIN

bar length 2,7 lm - pack. 80 Pcs - 216 lm


Article	H mm	€/lm	€/Pc
PJP 06-01	6	1,22	3,29 *
PJP 09-01	9	1,34	3,62 *

ARTICLES NOT FOR SALE SINGLY

INSTRUCTIONS FOR LAYING

1. Choose "PROJOLLY OPEN" according to the tile thickness. 2. Cut "PROJOLLY OPEN" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY OPEN" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.


PJP 06-01
scale 1:1



PJP 09-01
scale 1:1



EXAMPLES OF LAYING

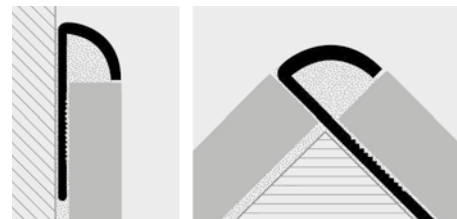

COLOURS

--

OTHER COLOURS ON DEMAND FOR A
MINIMUM OF 800 pcs


* = Production on demand with minimum quantity of 800 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOLLY ECO

SHOCKPROOF NON - TOXIC
COLOURED VINYL RESIN

PROJOLLY ECO is a rounded bead profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section, the availability of different colours also on demand and special pieces such as internal and external corners make **PROJOLLY ECO** a practical and economic profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

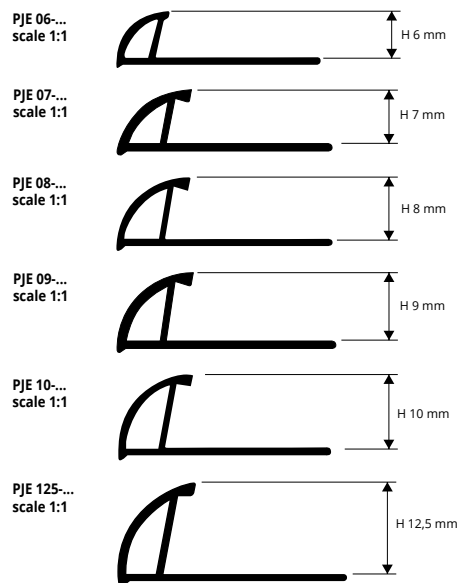

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROJOLLY ECO" according to the tile thickness and desired colour. 2. Cut "PROJOLLY ECO" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY ECO" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

COLOURS

01 - White	02 - Light grey	03 - Cement gray	04 - Light beige	05 - Dark beige	06 - Ivory
07 - Pink	08 - Sky blue	09 - Yellow	10 - Red	11 - Black	12 - Silver
13 - Gold	14 - Green	15 - Brown	16 - Blue	17 - Bahama beige	18 - Grey



COLOURED VINYL RESIN

bar length 2,7 lm - pack. 80 Pcs - 216 lm

Article	H mm	€/lm	€/Pc
PJE 06-01/06/18	6	0,84	2,27
PJE 08-...	8	0,97	2,62
PJE 10-...	10	1,10	2,97
PJE 125-...	12,5	1,37	3,70

ARTICLES NOT FOR SALE SINGLY

H 6 mm available the colours 01 - 06 - 18, other colours on demand. Available on demand in the colours 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 (0106 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PJE 08-... (chosen colour white) PJE 08-01.



COLOURED VINYL RESIN

bar length 2,7 lm - pack. 80 Pcs - 216 lm

Article	H mm	€/lm	€/Pc
PJE 07-...	7	0,90	2,43
PJE 09-...	9	1,03	2,78

ARTICLES NOT FOR SALE SINGLY

PRODUCTION ON DEMAND
MINIMUM QUANTITY 800 PCS BY COLOUR AND HEIGHT
(Production delay 4/5 weeks)

Available on demand in the colours: 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29 - 0106 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PJE 07-... (chosen colour white) PJE 07-01.

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height
(Price to be agreed. Production delay 4/5 weeks)

0106 - White ivory	19 - Beige	20 - Dark ivory
21 - Light pink	22 - Dark pink	23 - Dark antique pink
24 - Dark sky blue	25 - Brick red	26 - Turquoise green
27 - Dark green	28 - Hazel brown	29 - Dark brown

CAPSULES for three-ways joints

COLOURED PLASTIC

* Capsules & end caps of the on demand profiles are also on demand



EXTERNAL CAPSULES



CPJE .../.../...

COLOURED PLASTIC

Article	H mm	€/Pack. 20 pcs	€/Pack. 5 pcs
CPJE 06-01/06/18/...	6	18,84	4,97
CPJE 08-.../.../...	8	20,04	5,29
CPJE 10-.../.../...	10	21,49	5,63
CPJE 125-.../.../...	12,5	24,63	6,47

ARTICLES NOT FOR SALE SINGLY

H 6 mm available the colours 01 - 06 - 18, other colours on demand. Available in the colours: 01 - 02 - 03 - 04 - 05 - 06 - 07 - 08 - 09 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 (not available 0106 - 19 - 20 - 21 - 22 - 23 - 24 - 25 - 26 - 27 - 28 - 29). The code of the selected colour must be added to the article code. E.g.: CPJE 08-.../.../... (chosen colour white) CPJE 08-01/20.

PROJOLLY ECO MARBLE is a rounded bead profile in shockproof non - toxic marbled vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability of different marble effect finishes, also on demand, and special pieces such as internal and external corners make **PROJOLLY ECO MARBLE** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

PROJOLLY ECO MARBLE

SHOCKPROOF NON - TOXIC
MARBLED VINYL RESIN



SHOCKPROOF MARBLED VINYL RESIN

bar length 2,7 lm - pack. 80 Pcs - 216 lm

Article	H mm	€/lm	€/Pc
PJE... 06	6	1,53	4,13 *
PJE... 08	8	1,63	4,40
PJE... 10	10	1,74	4,70

ARTICLES NOT FOR SALE SINGLY

PJE... 125 available on demand.

Available in the colours: MC - MB - MR - MA - MV - MVA - MAS - MBS - MRS - MVAS - MTC - MTS (on demand MAB - MBC - MBO - MAM - MBD - MCRI - MCRC - MBDX - MGVC - MNA - MBPS - MVBL with a minimum quantity order of 800 pcs).

The code of the selected colour must be added to the article code.
E.g.: PJE... 06 (chosen colour carrara) PJEMC 06.

SHOCKPROOF MARBLED VINYL RESIN

bar length 2,7 lm - pack. 80 Pcs - 216 lm

Article	H mm	€/lm	€/Pc
PJE... 07	7	1,63	4,40 *
PJE... 09	9	1,74	4,70 *

ARTICLES NOT FOR SALE SINGLY


PRODUCTION ON DEMAND

MINIMUM QUANTITY 800 PCS BY COLOUR AND HEIGHT


(Production delay 4/5 weeks)

Available on demand in the colours: MC - MB - MR - MA - MV - MVA - MAS - MBS - MRS - MVAS - MTC - MTS - MAB - MBC - MBO - MAM - MBD - MCRI - MCRC - MBDX - MGVC - MNA - MBPS - MVBL with a minimum quantity order of 800 pcs.

The code of the selected colour must be added to the article code.
E.g.: PJE... 06 (chosen colour carrara) PJEMC 06.

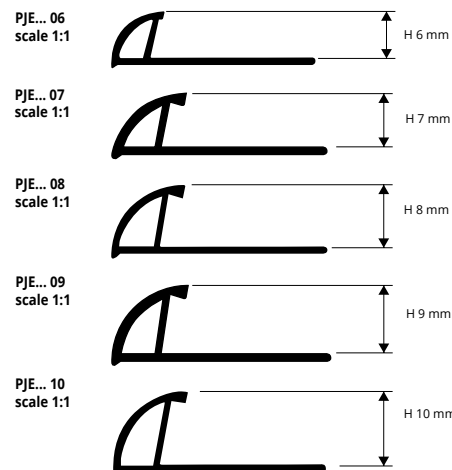

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

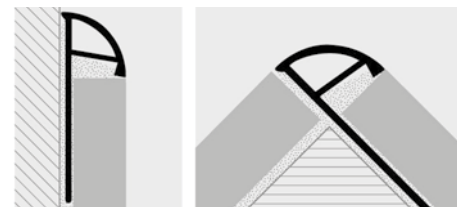

1. Choose "PROJOLLY ECO MARBLE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY ECO MARBLE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY ECO MARBLE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

COLOURS

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

* = Production on demand with minimum quantity of 800 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROJOLLY TRIANGLE


POLISHED, SUPER POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

PROJOLLY TRIANGLE is a triangle-shaped bead profile polished, super polished and brushed stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY TRIANGLE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PJTRAC... 06
scale 1:1



PJTRAC... 08
scale 1:1



PJTRAC... 10
scale 1:1



PJTRAC... 11
scale 1:1




PJTRAC... 125
scale 1:1



PJTRAC... 15
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

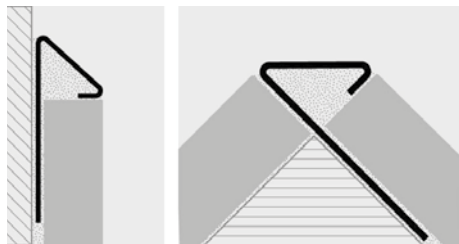

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm

Article	H mm	€/lm	€/Pc
PJTRAC 06	6	9,58	25,87
PJTRAC 08	8	10,07	27,19
PJTRAC 10	10	10,57	28,54
PJTRAC 11	11	10,88	29,38
PJTRAC 125	12,5	11,32	30,56
PJTRAC 15	15	11,82	31,91

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm

Article	H mm	€/lm	€/Pc
PJTRACML 06	6	12,94	34,94
PJTRACML 08	8	13,62	36,77
PJTRACML 10	10	14,31	38,64
PJTRACML 11	11	14,74	39,80
PJTRACML 125	12,5	15,30	41,31
PJTRACML 15	15	15,99	43,17



BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 8/10 mm

Article	H mm	€/lm	€/Pc
PJTRAC 06	6	11,08	29,92
PJTRAC 08	8	11,69	31,56
PJTRAC 10	10	12,18	32,89
PJTRAC 11	11	12,56	33,91
PJTRAC 125	12,5	13,06	35,26
PJTRAC 15	15	13,68	36,94

COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A	ACML - Super polished stainless steel AISI 304/1.4301-V2A	ACS - Brushed stainless steel AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

1. Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS, THREE-WAYS JOINTS and JOINTS

POLISHED, SUPER POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A / PLASTIC

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES and END CAPS - POLISHED STAINLESS STEEL

Article	H mm	€/Pack. 10 pcs	€/Pack. 2 pcs
CPJTRAC .../...	06-08-10-11-12,5-15	140,55	29,54
IPJTRAC .../...	06-08-10-11-12,5-15	140,55	29,54
CTPJTRAC .../...	06-08-10-11-12,5-15	182,82	38,40
TPJTRAC .../...	06-08-10-11-12,5-15	43,60	9,33

Choose the desired packaging: E.g.: CPJTRAC.../10 (Pack. 10 Pcs)
CPJTRAC.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES and END CAPS - SUPER POLISHED STAINLESS STEEL

Article	H mm	€/Pack. 10 pcs	€/Pack. 2 pcs
CPJTRACML .../...	06-08-10-11-12,5-15	175,93	37,00
IPJTRACML .../...	06-08-10-11-12,5-15	175,93	37,00
CTPJTRACML .../...	06-08-10-11-12,5-15	228,82	48,06
TPJTRACML .../...	06-08-10-11-12,5-15	56,03	11,82

Choose the desired packaging: E.g.: CPJTRACML.../10 (Pack. 10 Pcs)
CPJTRACML.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

EXTERNAL / INTERNAL / THREE-WAYS CAPSULES and CAPS - BRUSHED STAINLESS STEEL

Article	H mm	€/Pack. 10 pcs	€/Pack. 2 pcs
CPJTRACS .../...	06-08-10-11-12,5-15	160,48	33,71
IPJTRACS .../...	06-08-10-11-12,5-15	160,48	33,71
CTPJTRACS .../...	06-08-10-11-12,5-15	208,90	43,88
TPJTRACS .../...	06-08-10-11-12,5-15	49,75	10,57

Choose the desired packaging: E.g.: CPJTRACS.../10 (Pack. 10 Pcs)
CPJTRACS.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY

JOINTS - PLASTIC

Article	H mm	€/Pack. 10 pcs	€/Pack. 2 pcs
GIJTRA .../...	06-08-10-11-12,5-15	24,84	5,33

Choose the desired packaging: E.g.: GIJTRA.../10 (Pack. 10 Pcs)
GIJTRA.../2 (Pack. 2 Pcs)

ARTICLES NOT FOR SALE SINGLY



CPJTR... /...

IPJTR... /...

CTPJTR... /...

TPJTR... /...

GIJTRA... /...

PROJOLLY TRIANGLE is a triangle-shaped bead profile in brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in different finishes make **PROJOLLY TRIANGLE** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY TRIANGLE

NATURAL, POLISHED VARNISHED, CHROMED AND ANTIQUE BRASS



NATURAL BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PJTRON 10	10	20,25	54,68
PJTRON 125	12,5	22,25	60,08

SUPER POLISHED CHROMED BRASS
thermo packed bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PJTROC 10	10	28,67	77,41
PJTROC 125	12,5	31,13	84,05

MIRROR LINE




POLISHED VARNISHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PJTROL 10	10	24,47	66,07
PJTROL 125	12,5	26,93	72,71


ANTIQUÉ BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PJTROB 10	10	36,12	97,52
PJTROB 125	12,5	38,80	104,76

COLOURS

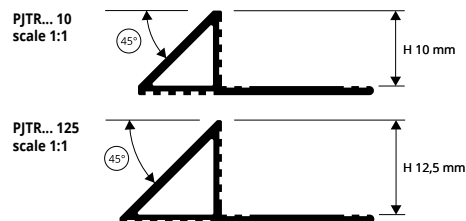

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

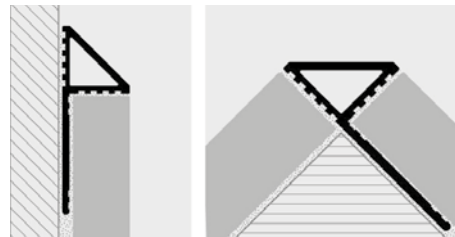


1. Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish.
2. Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.




PROJOLLY TRIANGLE

ANODIZED, POLISHED AND
BRUSHED ALUMINIUM

PROJOLLY TRIANGLE is a triangle-shaped bead profile in anodized, polished and brushed aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section, the availability in seven different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY TRIANGLE** a much sought-after profile that allows an elegant workmanlike application.

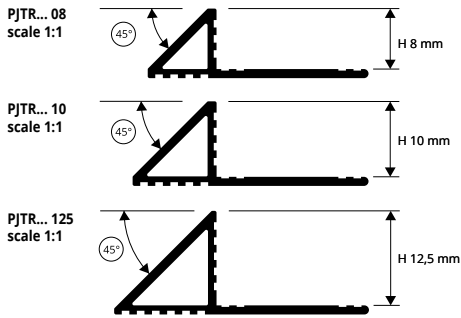

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

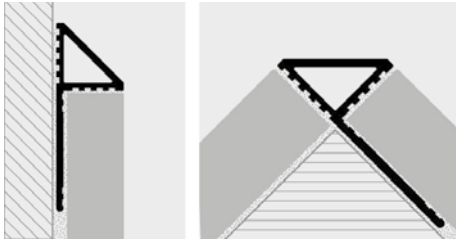

1. Choose "PROJOLLY TRIANGLE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY TRIANGLE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY TRIANGLE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

ANODIZED ALUMINIUM (silver - titanium - gold) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PJTAA 08	8	5,29	14,28
PJTAA 10	10	5,79	15,63
PJTAA 125	12,5	6,53	17,63
PJTRAT 08	8	5,72	15,44
PJTRAT 10	10	6,34	17,12
PJTRAT 125	12,5	6,97	18,82
PJTRAO 08	8	5,41	14,61
PJTRAO 10	10	5,96	16,09
PJTRAO 125	12,5	6,66	17,98

BRUSHED POLISHED ALUMINIUM (silver - gold) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PJTRBS 08	8	9,58	25,87
PJTRBS 10	10	10,32	27,86
PJTRBS 125	12,5	11,69	31,56
PJTRBOS 08	8	9,58	25,87
PJTRBOS 10	10	10,32	27,86
PJTRBOS 125	12,5	11,69	31,56

POLISHED ALUMINIUM (chrome - titanium - gold) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PJTRBC 08	8	8,88	23,98
PJTRBC 10	10	9,33	25,19
PJTRBC 125	12,5	10,57	28,54
PJTRBT 08	8	8,88	23,98
PJTRBT 10	10	9,33	25,19
PJTRBT 125	12,5	10,57	28,54
PJTRBO 08	8	8,88	23,98
PJTRBO 10	10	9,33	25,19
PJTRBO 125	12,5	10,57	28,54

ON DEMAND MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART.

CONTACT OUR CUSTOMER SERVICE FOR MINIMAL QUANTITY, TIMING AND PRICE.

COLOURS

ANODIZED			POLISHED			BRUSHED POLISHED	
AA - Anodized silver alum.	AT - Anodized titanium alum.	AO - Anodized gold alum.	BC - Polished chrome alum.	BT - Polished titanium alum.	BO - Polished gold alum.	BS - Brushed pol. silver alum.	BOS - Brushed pol. gold alum.

CAPSULES, END CAPS, THREE-WAYS JOINTS and JOINTS

* Capsules & end caps of the on demand profiles are also on demand

ANODIZED, POLISHED, BRUSHED POLISHED ALUMINIUM

CAPSULES, END CAPS, THREE-WAYS - ANODIZED ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJTAA .../...	08/10/125	89,60	19,71
IPJTAA .../...	08/10/125	89,60	19,71
TPJTAA .../...	08/10/125	43,60	9,33
CPJTRAT .../...	08/10/125	89,60	19,71
IPJTRAT .../...	08/10/125	89,60	19,71
TPJTRAT .../...	08/10/125	43,60	9,33
CPJTAAO .../...	08/10/125	89,60	19,71
IPJTAAO .../...	08/10/125	89,60	19,71
TPJTAAO .../...	08/10/125	43,60	9,33

Choose the desired pack & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJTAA 10/10

CAPSULES, END CAPS, THREE-WAYS - POLISHED ALUM.

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJTRBC .../...	08/10/125	102,64	22,56
IPJTRBC .../...	08/10/125	102,64	22,56
TPJTRBC .../...	08/10/125	49,75	10,57
CPJTRBT .../...	08/10/125	102,64	22,56
IPJTRBT .../...	08/10/125	102,64	22,56
TPJTRBT .../...	08/10/125	49,75	10,57
CPJTRBO .../...	08/10/125	102,64	22,56
IPJTRBO .../...	08/10/125	102,64	22,56
TPJTRBO .../...	08/10/125	49,75	10,57

Choose the desired pack & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJTRBC 10/10

CAPSULES, END CAPS, THREE-WAYS - BRUSHED POLISHED ALUM.

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
CPJTRBS .../...	08/10/125	116,89	25,71
IPJTRBS .../...	08/10/125	116,89	25,71
TPJTRBS .../...	08/10/125	56,03	11,82
CPJTRBOS .../...	08/10/125	116,89	25,71
IPJTRBOS .../...	08/10/125	116,89	25,71
TPJTRBOS .../...	08/10/125	56,03	11,82

Choose the desired pack & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJTRBS 10/10

JOINTS - PLASTIC

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
GIJTRA .../...	08/10/125	26,08	5,61

Choose the desired pack & height
Ex.: 10 mm joint in 10 Pcs Pack - GIJTRA 10/10

EXTERNAL CAPSULE INTERNAL CAPSULE THREE-WAYS CAPSULE



CPJTR... ..



IPJTR... ..



CTPJTR... ..

END CAPS



TPJTR... ..

JOINTS



GIJTRA .../...

PROJOLLY ANGLE 135 is a polished and satin stainless steel profile that can be used as protection for the 135° corners of coverings. Its particular section, the availability in two different finishes make **PROJOLLY ANGLE 135** a much sought-after profile that allows an elegant workmanlike application.

PROJOLLY ANGLE 135

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PJTR135AC 08	8	15,63	42,20
PJTR135AC 10	10	16,24	43,85
PJTR135AC 11	11	16,60	44,82
PJTR135AC 125	12,5	17,02	45,95



BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PJTR135ACS 08	8	18,47	49,87
PJTR135ACS 10	10	19,08	51,52
PJTR135ACS 11	11	19,56	52,81
PJTR135ACS 125	12,5	19,92	53,78

COLOURS



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS


PJTR135... 08
scale 1:1



PJTR135... 10
scale 1:1




PJTR135... 11
scale 1:1



PJTR135... 125
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

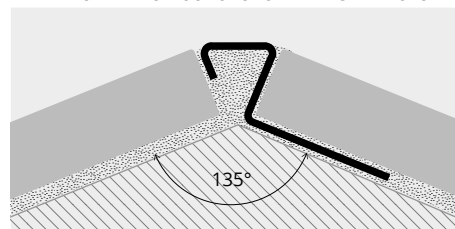


1. Choose "PROJOLLY ANGLE 135" according to the tile thickness and desired finish.
2. Cut "PROJOLLY ANGLE 135" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROJOLLY ANGLE 135" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.




PROINTER AC

POLISHED, SUPER POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

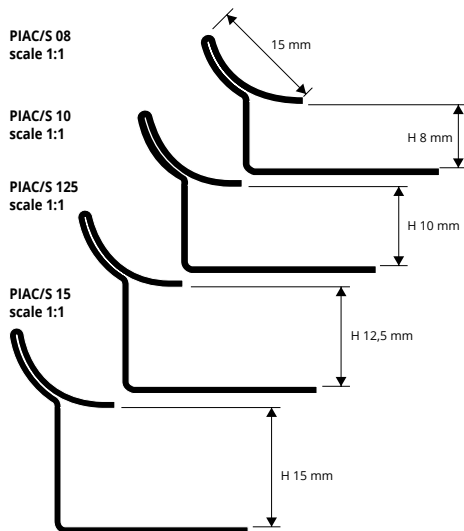

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

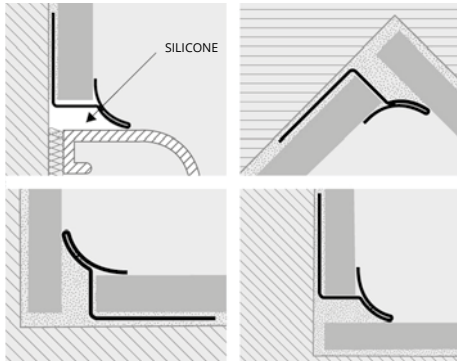

1. Choose "PROINTER AC" according to the tile thickness and desired finish.
2. Cut "PROINTER AC" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROINTER AC" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROINTER AC is a cove-shaped profile in polished, super polished and brushed stainless steel AISI 304 / 1.4301 - V2A. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes and special pieces, such as internal and external corners, make **PROINTER AC** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application even in environments subject to high mechanical stresses.



POLISHED STAINLESS STEEL AISI 304/1.4301 V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PIAC 08	8	14,56	39,31
PIAC 10	10	15,39	41,55
PIAC 125	12,5	19,62	52,97
PIAC 15	15	21,81	58,89

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PIACML 08	8	18,91	51,06
PIACML 10	10	21,79	58,83
PIACML 125	12,5	24,53	66,23
PIACML 15	15	27,22	73,49

COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A	ACML - Super polished stainless steel AISI 304/1.4301-V2A	ACS - Brushed stainless steel AISI 304/1.4301-V2A

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

Corners of the on demand profiles are also on demand *



BRUSHED STAINLESS STEEL AISI 304/1.4301 V2A with protective film
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PIACS 08	8	18,26	49,30
PIACS 10	10	20,93	56,51
PIACS 125	12,5	23,57	63,64
PIACS 15	15	26,16	70,63

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS

POLISHED STAINLESS STEEL AISI 316/1.4404-V4A - pack. 2 Pcs

Article	€/Pack. 2 Pcs
REPIACM/2	47,09
RIPIACM/2	47,69
RITPIACM/2	46,48

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS

BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A - pack. 2 Pcs

Article	€/Pack. 2 Pcs
REPIACMS/2	51,92
RIPIACMS/2	52,52
RITPIACMS/2	51,31



RITPIAC...




REPIAC...




RIPIAC...

PROINTER KL ACC

STAINLESS STEEL AISI 304/1.4301-V2A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

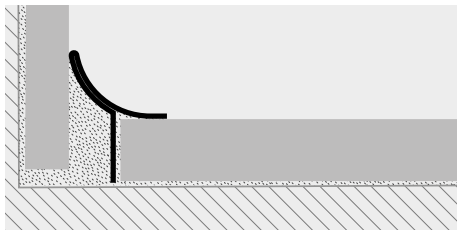

1. Choose "PROINTER KL ACC" according to the desired finish.
2. Cut "PROINTER KL ACC" to the desired length.
3. Apply the silicone along the floor-wall connection.
4. Press the arrowhead of "PROINTER KL ACC" into the silicone evenly until it is completely adherent to the floor and wall.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10mm

Article	H mm	€/lm	€/Pc
PIKLAC 15	15	12,62	34,07

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	H mm	€/lm	€/Pc
PIKLACS 15	15	15,94	43,04

COLOURS

AC - Polished stainless steel AISI 304/1.4301-V2A	ACS - Brushed stainless steel AISI 304/1.4301-V2A



SANDED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10mm

Article	H mm	€/lm	€/Pc
PIKLACSB 15	40,50	17,32	46,76

SUPER POLISHED ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10mm

Article	H mm	€/lm	€/Pc
PIKLACML 15	15	16,54	44,66

AVAILABLE MINIMUM QUANTITY 100 PCS

ACSB - Sanded stainless st. AISI 304/1.4301-V2A	ACML - Super polished stainless steel AISI 304/1.4301-V2A

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROINTER AC 316 is a cove-shaped profile in polished, super polished and brushed stainless steel AISI 316 / 1.404 - V4A. It is particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes and special pieces, such as internal and external corners, make **PROINTER AC 316** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application even in environments subject to high mechanical stresses.

PROINTER AC


POLISHED AND BRUSHED STAINLESS STEEL
AISI 316/1.4401-V4A




POLISHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm



BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

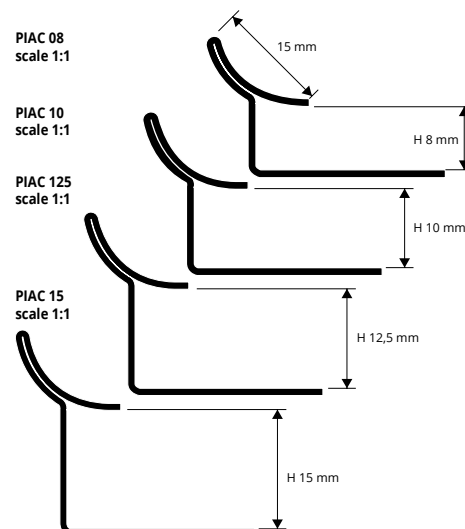

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

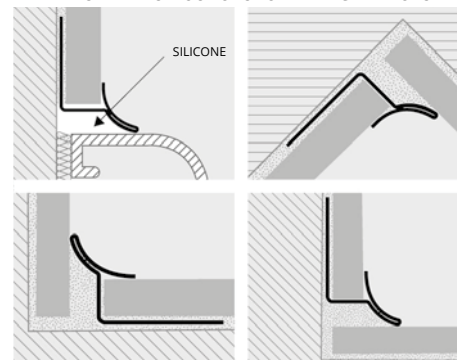

1. Choose "PROINTER AC 316" according to the tile thickness and desired finish.
2. Cut "PROINTER AC 316" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROINTER AC 316" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROINTER KL ACC


STAINLESS STEEL AISI 316/1.4401-V4A




POLISHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm



BRUSHED STAINLESS STEEL AISI 316/1.4404-V4A
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

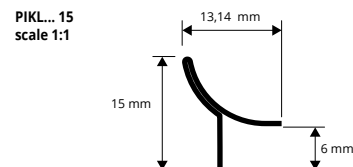


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

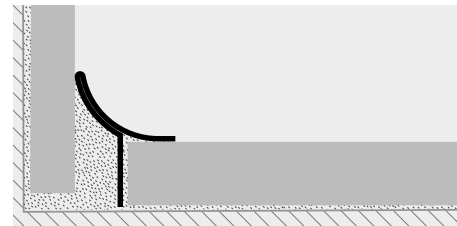

1. Choose "PROINTER KL ACC 316" according to the desired finish.
2. Cut "PROINTER KL ACC 316" to the desired length.
3. Apply the silicone along the floor-wall connection.
4. Press the arrowhead of "PROINTER KL ACC 316" into the silicone evenly until it is completely adherent to the floor and wall.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

COLOURS



ACM - Polished stainless steel
AISI 316/1.4404-V4A

ACMS - Brushed stainless steel
AISI 316/1.4404-V4A


= News 2021

= Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROINTER AL

ANODIZED AND POLISHED ALUMINIUM

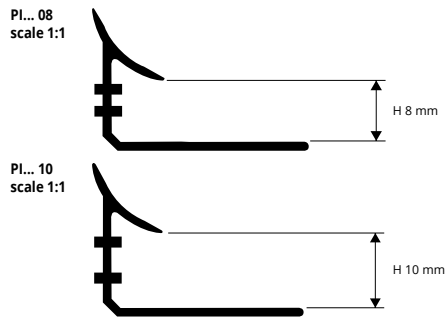

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

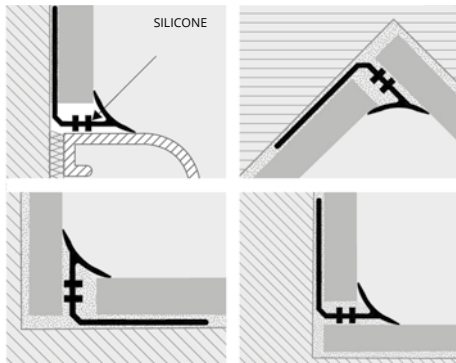

1. Choose "PROINTER AL" according to the tile thickness and desired finish.
2. Cut "PROINTER AL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROINTER AL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROINTER AL is a cove-shaped profile in anodized and polished aluminium. It is particularly suitable to ensure cleanliness and hygiene in indoors environment where good resistance to mechanical and chemical stresses are required. Its particular section and the availability in four finishes and special pieces, such as internal and external corners, make **PROINTER AL** a much sought after profile. The profile is easy to match with the wall covering and allows a workmanlike application.



ANODIZED GOLD OR SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PIAA 08	8	6,64	17,93
PIAA 10	10	6,64	17,93
PIAO 08	8	7,09	19,14
PIAO 10	10	7,09	19,14

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS
ANODIZED GOLD (AO) or SILVER ALUMINIUM (AA) - pack. 2 Pcs

Article	€/Pack. 2 Pcs
REPI.../2	26,57
RIP.../2	27,77
RITPI.../2	26,57

Corners of the on demand profiles are also on demand *

COLOURS

ANODIZED	
AA - Anodized silver alum.	AO - Anodized gold alum.
POLISHED	
BC - Polished chrome alum.	BO - Polished gold alum.



POLISHED GOLD OR CHROMED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PIBC 08	8	10,22	27,59
PIBC 10	10	11,96	32,29
PIBO 08	8	10,22	27,59
PIBO 10	10	11,96	32,29

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS
POLISHED GOLD (BO) or CHROMED ALUMINIUM (BC) - pack. 2 Pcs

Article	€/Pack. 2 Pcs
REPI.../2	31,99
RIP.../2	33,20
RITPI.../2	31,99

RITPI...

EXTERNAL CORNER



PROTERMINAL, PROJOLLY SQUARE, PROJOLLY QUART (NO PROINTER)


RIP...

INTERNAL CORNER




PROINTER KL ALL

POLISHED AND CHROMED BRASS AND ANODIZED AND POLISHED ALUMINIUM

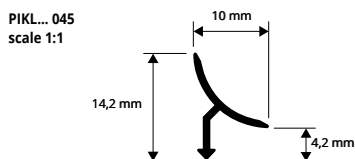

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

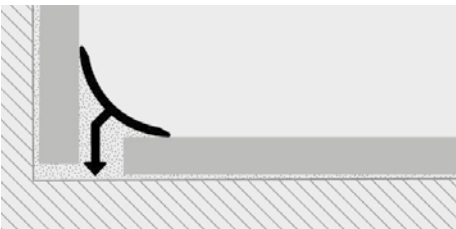

1. Choose "PROINTER KL ALL" according to the desired finish.
2. Cut "PROINTER KL ALL" to the desired length.
3. Apply the silicone along the floor-wall connection.
4. Press the arrowhead of "PROINTER KL ALL" into the silicone evenly until it is completely adherent to the floor and wall.



POLISHED / CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PIKLOL 045	4,5	13,85	37,40
PIKLOC 045	4,5	21,65	58,45

CAPS - VARNISHED PLASTIC

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TPIKL .../...	3,12	15,55

COLOURS

OL - Polished brass	OC - Chromed brass
---------------------	--------------------



POLISHED CHROME ALUMINIUM / GOLD thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PIKLBC 045	4,5	8,04	21,71
PIKLBO 045	4,5	8,04	21,71

ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PIKLAA 045	4,5	5,63	41,01

CAPS - VARNISHED PLASTIC

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TPTPIKL .../...	3,12	15,55

COLOURS

AA - Anodized silver alum.	BC - Polished chrome alum.	BO - Polished gold alum.
----------------------------	----------------------------	--------------------------

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.


PROINTER is a cove-shaped profile in shockproof non - toxic colored vinyl resin. It is particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in twelve colours and special pieces, such as internal and external corners, make **PROINTER** a much sought after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

PROINTER

SHOCKPROOF NON - TOXIC COLORED VINYL RESIN



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

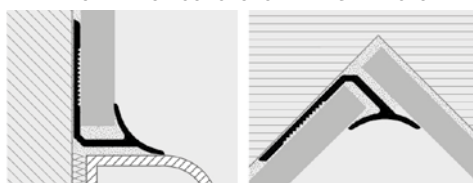

1. Choose "PROINTER" according to the tile thickness and desired colour. 2. Cut "PROINTER" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROINTER" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

NON-TOXIC SHOCKPROOF VINYL RESIN

bar length 2,7 lm - pack. 20 Pcs - 54 lm (white 108 lm)

Article	H mm	€/lm	€/Pc	
PI 06-01	6	1,34	3,62	*
PI 07-01	7	1,44	3,89	*
PI 08-...	8	1,54	4,16	
PI 09-01	9	1,64	4,43	*
PI 10-...	10	1,75	4,73	


H 6 mm available in white. Other colours on demand.

Available on demand in the colours 01-02-03-05-06-10-11-12-15-17-18-0106 (04-07-08-09-13-14-19-20-21-22-23-24-25-26-27-28-29 with a minimum quantity order of 800 pcs.

The code of the selected colour must be added to the article code.

E.g.: PI 06-... (chosen colour white) PI 06-01.

WHITE NOT FOR SALE SINGLY

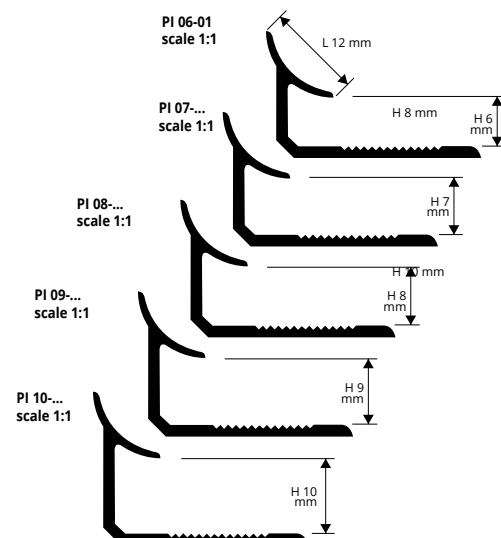

PI 07-... E PI 09-...
PRODUCTION ON DEMAND
MINIMUM QUANTITY 800 PCS BY COLOUR AND HEIGHT
(PRODUCTION DELAY 4/5 WEEKS)

COLOURS

01 - White	0106 - White ivory	02 - Light grey	03 - Cement gray
05 - Dark beige	06 - Ivory	10 - Red	11 - Black
12 - Silver	15 - Brown	17 - Bahama beige	18 - Grey

AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

04 - Light beige	07 - Pink	19 - Beige	20 - Dark ivory	21 - Light pink
08 - Sky blue	09 - Yellow	22 - Dark pink	23 - Dark antique pink	24 - Dark sky blue
13 - Gold	14 - Green	25 - Brick red	26 - Turquoise green	27 - Dark green
16 - Blue	28 - Hazel brown	29 - Dark brown		

COLOURS

INTERNAL, EXTERNAL, THREE-WAYS PROINTER CORNER JOINTS

VARNISHED PLASTIC (Vinyl Resin) - pack. 10 Pcs

Article	€/Pack.
REPI .../...	49,86
RIPi .../...	49,86
RITPI .../...	49,86

COLOURS

01 - White	0106 - White ivory	02 - Light grey	03 - Cement gray	05 - Dark beige	06 - Ivory
10 - Red	11 - Black	12 - Silver	15 - Brown	17 - Bahama beige	18 - Grey

Corners of the on demand profiles are also on demand *

Available in the colours: 01-02-03-05-06-10-11-12-15-17-18-0106.

Available on demand 04-07-08-09-13-14-19-20-21-22-23-24-25-26-27-28-29.

The code of the selected colour must be added to the article code.

E.g.: RIPI... (Chosen colour Ivory 06) RIPI 06.

PLEASE CHOOSE THE DESIRED COLOUR CODE FROM OUR COLOUR CHART. SPECIFICATION OF THE HEIGHT IS NOT REQUIRED.



REPI...

RITPI...


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.


PROLISTEL CHANNEL

STAINLESS STEEL AISI 304/1.4301-V2A

PLTCH... 08 - 10 - 11 - 12,5
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

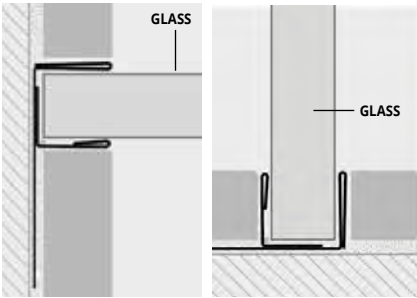

1. Choose "PROLISTEL CHANNEL" according to the visible surface and desired finish. 2. Cut "PROLISTEL CHANNEL" to the desired length and apply the adhesive on the surface where the profile will be laid. 3. Press "PROLISTEL CHANNEL" into the adhesive, aligning it with the tiles leaving a 2 mm. joint. Remove immediately all remains of adhesive from the surface of the profile. 4. Fill the joint between the profile and tiles with grout in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS



PROLISTEL CHANNEL is a F-shaped strip in polished an satin-finish stainless steel AISI 304/1.4301-V2A suitable to decorate the wall coverings in ceramic tiles and natural stones. Its section allows the realization of a decorative joint which can also be used as a guide for the fixing of sheets of glass on floors and walls. Its particular section and the availability in two different finishes make **PROLISTEL CHANNEL** a much sought-after profile that allows an easy workmanlike application.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/lm	€/Pc
PLTCHAC 0812	8	12	43,47	117,37
PLTCHAC 1012	10	12	45,89	123,90
PLTCHAC 1112	11	12	48,30	130,41
PLTCHAC 12512	12,5	12	50,71	136,92

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A
bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/lm	€/Pc
PLTCHACS 0812	8	12	47,09	127,14
PLTCHACS 1012	10	12	49,51	133,68
PLTCHACS 1112	11	12	51,92	140,18
PLTCHACS 12512	12,5	12	54,34	146,72

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/lm	€/Pc
PLTCHAC 0808	8	08	43,47	117,37
PLTCHAC 1008	10	08	45,89	123,90
PLTCHAC 1108	11	08	48,30	130,41
PLTCHAC 12508	12,5	08	50,71	136,92

SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A
bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/lm	€/Pc
PLTCHACS 0808	8	08	47,09	127,14
PLTCHACS 1008	10	08	49,51	133,68
PLTCHACS 1108	11	08	51,92	140,18
PLTCHACS 12508	12,5	08	54,34	146,72

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/lm	€/Pc
PLTCHAC 0810	8	10	43,47	117,37
PLTCHAC 1010	10	10	45,89	123,90
PLTCHAC 1110	11	10	48,30	130,41
PLTCHAC 12510	12,5	10	50,71	136,92


SATIN-FINISH STAINLESS STEEL AISI 304/1.4301-V2A
bar length 2,7 lm - pack. 1 Pc

Article	H mm	L mm	€/lm	€/Pc
PLTCHACS 0810	8	10	47,09	127,14
PLTCHACS 1010	10	10	49,51	133,68
PLTCHACS 1110	11	10	51,92	140,18
PLTCHACS 12510	12,5	10	54,34	146,72


PROLISTEL CHANNEL

ANODIZED AND POLISHED ALUMINIUM

PLTCH... 08 - 10 - 11 - 12,5
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

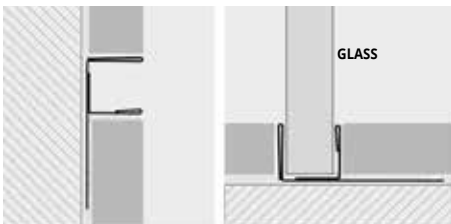

1. Scegliere "PROLISTEL CHANNEL" in funzione della superficie a vista e della finitura desiderata. 2. Tagliare "PROLISTEL CHANNEL" della lunghezza desiderata ed applicare l'adesivo sul supporto dove sarà applicato il listello. 3. Premere "PROLISTEL CHANNEL" nell'adesivo avendo cura di allinearne i bordi con la superficie del rivestimento e di lasciare una fuga di circa 2 mm. Rimuovere immediatamente residui di adesivo dalla superficie del profilo. 4. Stuccare accuratamente le fughe tra profilo e piastrella onde evitare il ristagno di eventuale acqua. Rimuovere immediatamente residui di stucco dalla superficie del profilo.




ANODIZED SILVER ALUMINIUM
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTCHAA 08	8	14,31	38,64
PLTCHAA 10	10	15,55	41,99
PLTCHAA 11	11	16,48	44,50
PLTCHAA 125	12,5	17,41	47,01

POLISHED CHROME ALUMINIUM
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTCHBC 08	8	16,80	45,36
PLTCHBC 10	10	18,04	48,71
PLTCHBC 11	11	18,97	51,22
PLTCHBC 125	12,5	19,90	53,73

COLOURS



= News 2021

= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROTERMINAL INT is a profile in anodized and polished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings and like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles. Its particular section and the availability in four different finishes make **PROTERMINAL INT** a much sought-after profile that allows an elegant workmanlike application.

PROTERMINAL INT

ANODIZED AND POLISHED ALUMINIUM



ANODIZED ALUMINIUM (silver - titanium) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTIAA 08	8	8,45	22,82
PTIAA 10	10	8,96	24,19
PTIAA 125	12,5	10,88	29,38
PTIAT 08	8	9,62	25,97
PTIAT 10	10	10,13	27,35
PTIAT 125	12,5	12,18	32,89

INTERNAL, EXTERNAL, THREE-WAYS JOINTS
ANODIZED POLISHED ALUMINIUM - pack. 3 Pcs


Article	€/Pack.
RIPTI ... 08 - 10 - 125/3	18,66
REPTI ... 08 - 10 - 125/3	18,66
RTPIT ... 08 - 10 - 125/3	18,66



POLISHED ALUMINIUM (chrome - titanium) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTIBC 08	8	12,18	32,89
PTIBC 10	10	12,69	34,26
PTIBC 125	12,5	14,62	39,47
PTIBT 08	8	13,37	36,10
PTIBT 10	10	13,86	37,42
PTIBT 125	12,5	15,92	42,98


INTERNAL CORNER
RIPTI ... 08 - 10 - 125




EXTERNAL CORNER
REPTI ... 08 - 10 - 125



3 WAYS JOINT
RTPIT ... 08 - 10 - 125

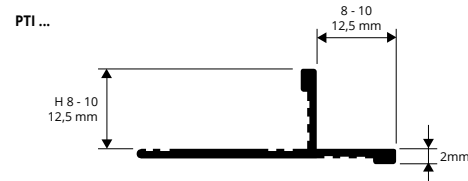

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROTERMINAL INT" according to the tile thickness and desired finish. 2. Cut "PROTERMINAL INT" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL INT" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

COLOURS

ANODIZED		POLISHED	
AA - Anodized silver alum.	AT - Anodized titanium alum.	BC - Polished chrome alum.	BT - Polished titanium alum.


On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal quantity, timing and price.




PROTERMINAL

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROTERMINAL is a L-shaped profile in polished and brushed stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor coverings. Its particular section and the availability in two different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

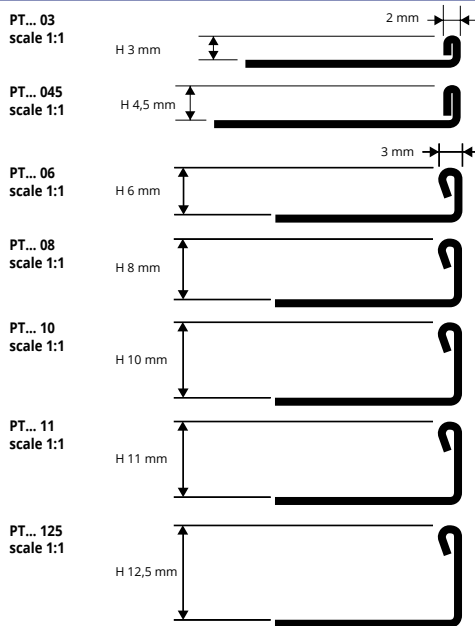

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

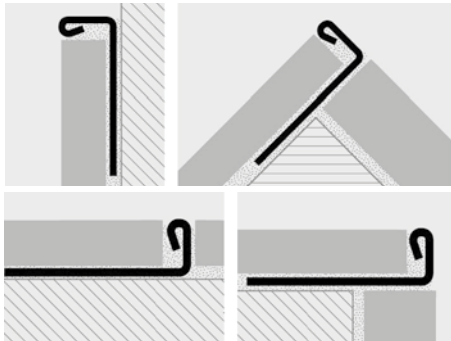

1. Choose "PROTERMINAL" according to the tile thickness and desired finish. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PTAC 03	3	8,95	24,16
PTAC 045	4,5	9,12	24,62
PTAC 06	6	9,51	25,68
PTAC 08	8	9,84	26,57
PTAC 10	10	10,35	27,95
PTAC 11	11	10,53	28,43
PTAC 125	12,5	10,73	28,97

BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PTACS 03	3	10,41	28,11
PTACS 045	4,5	11,36	30,67
PTACS 06	6	11,75	31,73
PTACS 08	8	12,14	32,78
PTACS 10	10	12,58	33,97
PTACS 11	11	12,78	34,51
PTACS 125	12,5	13,03	35,18

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.




Curve version available

COLOURS



PROTERMINAL

POLISHED STAINLESS STEEL
AISI 316L/1.4404-V4A

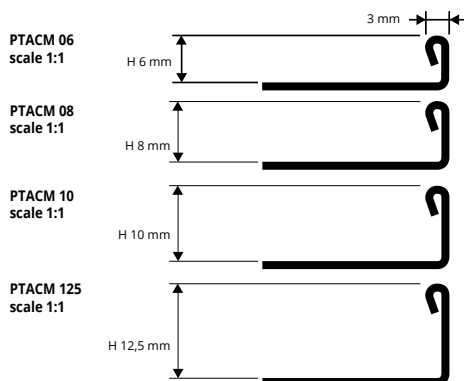

1. Choose "PROTERMINAL" according to the tile thickness. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POLISHED STAINLESS ST. AISI 316/1.4404-V4A
with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm



Article	H mm	€/lm	€/Pc
PTACM 06	6	12,38	33,43
PTACM 08	8	12,80	34,56
PTACM 10	10	13,46	36,34
PTACM 125	12,5	13,94	37,64



COLOURS



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROTERMINAL is a L-shaped profile in chromed and antique brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance make PROJOLLY a much sought-after profile that allows a workmanlike application.

PROTERMINAL

CHROMED BRASS, BRUSHED BRASS AND ANTIQUE BRASS



CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PTOC 06	6	18,64	50,33
PTOC 08	8	19,43	52,46
PTOC 10	10	19,79	53,43
PTOC 125	12,5	20,42	55,13

COLOURS



BRUSHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PTOS 06	6	10,87	29,35
PTOS 08	8	11,50	31,05
PTOS 10	10	12,39	33,45
PTOS 125	12,5	13,39	36,15

ANTIQU BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PTOB 06	6	26,62	71,87
PTOB 08	8	27,77	74,98
PTOB 10	10	30,29	81,78
PTOB 125	12,5	32,66	88,18

INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERMINAL" according to the tile thickness. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

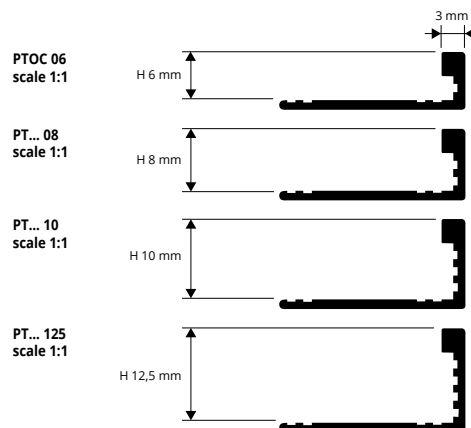

EXAMPLES OF LAYING

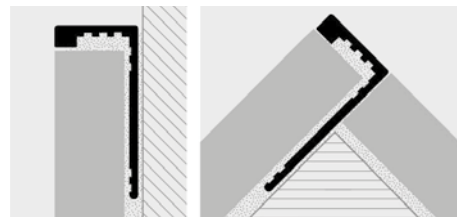

PROTERMINAL is a L-shaped profile in natural and anodized aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and the availability in six different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application.

PROTERMINAL

NATURAL AND ANODIZED ALUMINIUM



ANODIZED ALUMINIUM (gold-silver) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTAA 03	3	3,71	10,02
PTAA 045	4,5	3,89	10,50
PTAA 06	6	4,03	10,88
PTAA 08	8	4,09	11,04
PTAA 10	10	4,34	11,72
PTAA 11	11	4,73	12,77
PTAA 125	12,5	4,99	13,47
PTAA 15	15	5,30	14,31
PTAA 20	20	6,20	16,74
PTAO 03	3	3,71	10,02
PTAO 045	4,5	3,89	10,50
PTAO 06	6	4,03	10,88
PTAO 08	8	4,09	11,04
PTAO 10	10	4,34	11,72
PTAO 11	11	4,73	12,77
PTAO 125	12,5	4,99	13,47

COLOURS



ANODIZED ALUMINIUM (black-titanium-copper-bronze- antique bronze) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTNE 08	8	5,61	15,15
PTNE 10	10	5,85	15,79
PTNE 125	12,5	6,15	16,61
PTAT 08	8	5,61	15,15
PTAT 10	10	5,85	15,79
PTAT 11	11	5,96	16,09
PTAT 125	12,5	6,15	16,61
PTAR 08	8	5,61	15,15
PTAR 10	10	5,85	15,79
PTAR 125	12,5	6,15	16,61
PTAB 08	8	5,61	15,15
PTAB 10	10	5,85	15,79
PTAB 125	12,5	6,15	16,61
PTBRA 10	10	8,87	23,95
PTBRA 125	12,5	8,87	23,95

NATURAL ALUMINIUM


bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTAN 03	3	2,66	7,18
PTAN 045	4,5	2,73	7,37


COLOURS



On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal quantity, timing and price.

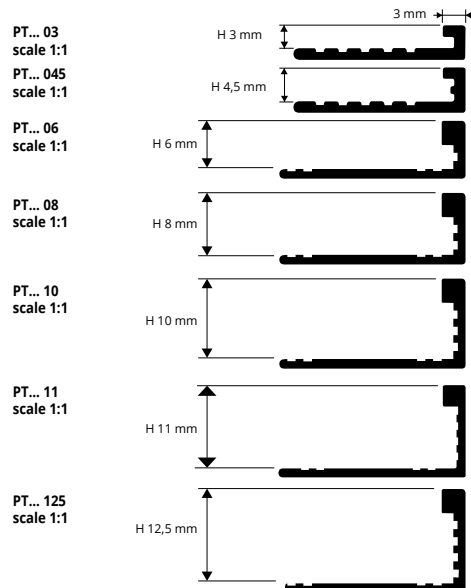

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

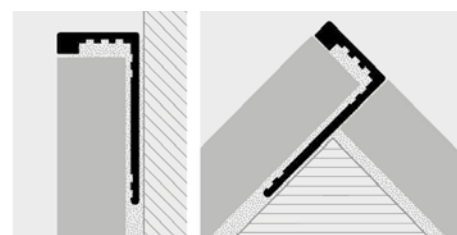


1. Choose "PROTERMINAL" according to the tile thickness and desired finish. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


PROTERMINAL

POLISHED, BRUSHED AND
VARNISHED ALUMINIUM

PROTERMINAL is a L-shaped profile in polished, brushed and varnished aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings (the varnished only for wall application). Its particular section and the availability in different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application.

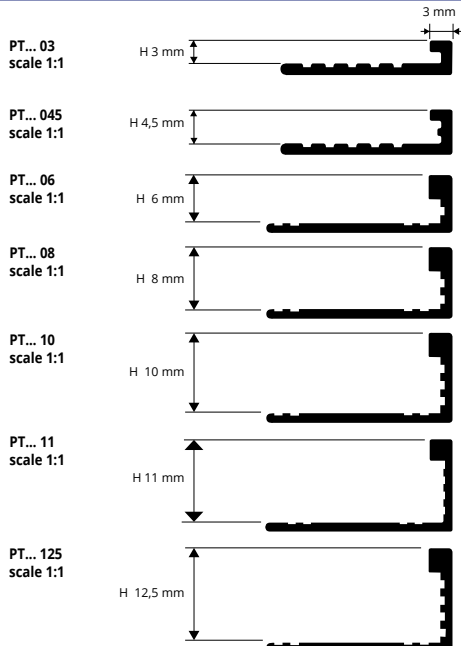

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

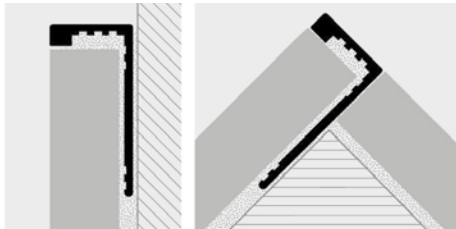


1. Choose "PROTERMINAL" according to the tile thickness and desired finish (color).
2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROTERMINAL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POLISHED ALUMINIUM (chrome, gold, copper, titanium, black)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTBC 03	3	7,64	20,63
PTBC 045	4,5	8,04	21,71
PTBC 06	6	8,23	22,22
PTBC 08	8	8,56	23,11
PTBC 10	10	8,75	23,63
PTBC 11	11	8,96	24,19
PTBC 125	12,5	9,19	24,81
PTBO 03	3	7,64	20,63
PTBO 045	4,5	8,04	21,71
PTBO 06	6	8,23	22,22
PTBO 08	8	8,56	23,11
PTBO 10	10	8,75	23,63
PTBO 11	11	8,96	24,19
PTBO 125	12,5	9,19	24,81
PTBT 08	8	9,33	25,19
PTBT 10	10	9,69	26,16
PTBT 11	11	9,95	26,86
PTBT 125	12,5	10,32	27,86
PTBR 08	8	9,33	25,19
PTBR 10	10	9,69	26,16
PTBR 125	12,5	10,32	27,86
PTBN 06	6	9,06	24,46
PTBN 08	8	9,33	25,19
PTBN 10	10	9,69	26,16
PTBN 125	12,5	10,32	27,86

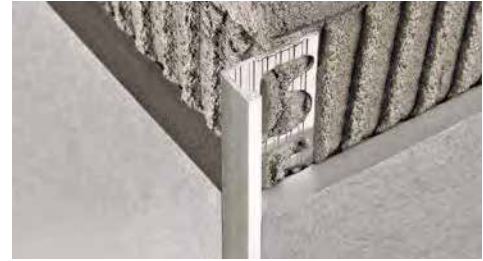

BRUSHED ALUMINIUM (silver, titanium, black, copper, antique bronze)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTBS 045	4,5	9,78	26,41
PTBS 08	8	8,96	24,19
PTBS 10	10	9,51	25,68
PTBS 11	11	9,83	26,54
PTBS 125	12,5	10,21	27,57
PTRS 045	4,5	9,78	26,41
PTRS 08	8	10,07	27,19
PTRS 10	10	10,45	28,21
PTRS 125	12,5	11,32	30,56
PTTS 045	4,5	9,78	26,41
PTTS 08	8	10,07	27,19
PTTS 10	10	10,45	28,21
PTTS 11	11	10,88	29,38
PTTS 125	12,5	11,32	30,56
PTBOS 08	8	8,96	24,19
PTBOS 10	10	9,51	25,68
PTBOS 125	12,5	10,21	27,57
PTNS 08	8	10,07	27,19
PTNS 10	10	10,45	28,21
PTNS 125	12,5	11,32	30,56
PTBRAS 10	10	10,45	28,21
PTBRAS 125	12,5	11,32	30,56

COATED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pc - 54 lm (colour white 40 Pcs - 108 lm)

Article	H mm	€/lm	€/Pc
PTA 06-01	6	5,10	13,77
PTA 08-01	8	5,24	14,15
PTA 10-...	10	5,69	15,36
PTA 11-01	11	5,90	15,93
PTA 125-01	12,5	6,13	16,55


H 10 available in the colours: 01 - 0106 - 11.
The code of the selected colour must be added to the article code.
E.g.: PTA 10-... (chosen colour white ivory varnished alum.)
PTA 10-0106.

COLOURS



PTA 06-... & PTA 125-... For other colours different from white, please contact our company for quantity and price. Production on demand, production delay 4/5 weeks. (minimum quantity order of 100 pcs).

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

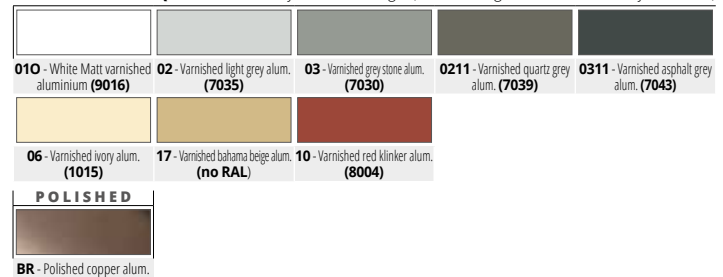

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROTERMINAL is a L-shaper profile in powder coated aluminum that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability in different finishes make **PROTERMINAL** an elegant and much-sought after profile.

PROTERMINAL

STONE LINE ALUMINIUM AND
TUSCANY LINE



STONE LINE thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm	€/lm	€/Pc
PTA 06-SL...	6	7,47	20,17
PTA 08-SL...	8	7,78	21,01
PTA 10-SL...	10	8,09	21,84
PTA 11-SL...	11	8,39	22,65
PTA 125-SL...	12,5	8,70	23,49

The code of the selected colour must be added to the article code.
E.g.: PTA 08... (chosen colour Stone white) PTA 08-SL01.

TUSCANY LINE thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTA 08-...	8	8,09	21,84
PTA 10-...	10	8,59	23,19
PTA 125-...	12,5	9,33	25,19


The code of the selected colour must be added to the article code.
E.g.: PTA 08... (chosen colour tuscan grey) PTA 08-03TU.

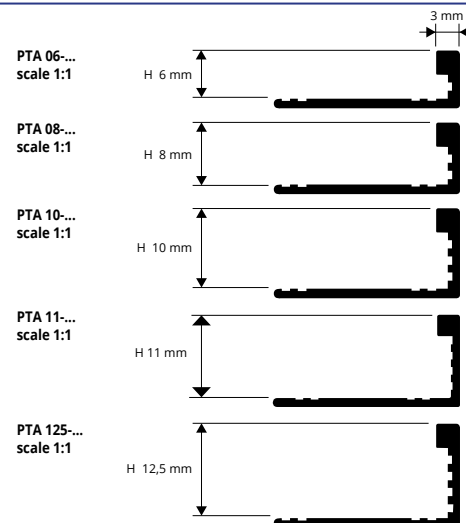

COLOURS

STONE LINE						
SL01 - Stone white	SL02 - Stone cream	SL03 - Stone greyvory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	SL07 - Stone antragray
SL08 - Stone antrdark	SL09 - Stone bronze	SL10 - Stone corten	SL11 - Stone brown	SL12 - Stone black	SL13 - Stone oyster grey	
TUSCANY						
03TU - Tuscan grey	05TU - Tuscan beige	20TU - Tuscan bronze				

EXAMPLES FOR LAYING METHODS

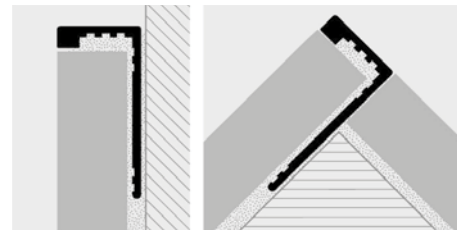

PROTERMINAL is a L-shaped profile in shockproof non - toxic colored vinyl resin that can be applied on external corners of coverings. It can be used to close the perimeter of coverings. Its particular section and the availability in different colours also on demand make **PROTERMINAL** a much sought-after profile. It can be easily matched with the wall covering and allows an elegant workmanlike application.

PROTERMINAL

SHOCKPROOF NON - TOXIC
COLORED VINYL RESIN

NON-TOXIC SHOCKPROOF COLOURED VINYL RESIN
bar length 2,7 lm - pack. 54 lm (white 108 lm)

Article	H mm	€/lm	€/Pc
PT 06-...	6	1,14	3,08
PT 08-...	8	1,28	3,46
PT 10-...	10	1,40	3,78
PT 125-...	12,5	1,67	4,51


Available in the colours: 01-0106-02-03-04-05-06-11-12-17-18
Available on demand 19-20-21-22-23-24-25-26-27-28-29-07-08-09-10-13-14-15-16 with a minimum quantity order of 800 pcs. The code of the selected colour must be added to the article code. E.g.: PT 06-... (chosen colour white) PT 06-01.

WHITE NOT FOR SALE SINGLY



EXAMPLE AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERMINAL" according to the tile thickness and desired colour. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

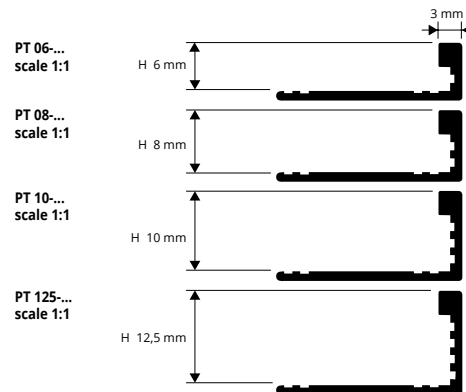

COLOURS

01 - White	0106 - White ivory	02 - Light grey	03 - Cement gray
04 - Light Beige	05 - Dark Beige	06 - Ivory	11 - Black
12 - Silver	17 - Bahama Beige	18 - Grey	


AVAILABLE MINIMUM QUANTITY 800 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)

19 - Beige	20 - Dark ivory	21 - Light pink	22 - Dark pink	23 - Dark antique pink
24 - Dark sky blue	25 - Brick red	26 - Turquoise green	27 - Dark green	28 - Hazel brown
29 - Dak brown	07 - Pink	08 - Sky blue	09 - Yellow	10 - Red
13 - Gold	14 - Green	15 - Brown	16 - Blue	


PROLISTEL ACC

POLISHED, BRUSHED, SANDED
STAINLESS STEEL AISI 304/1.4301-V2A

PROLISTEL ACC is a listel in polished, brushed, sanded stainless steel AISI 304/1.4301-V2A with a flat and U-shaped (internal use) visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL ACC** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.

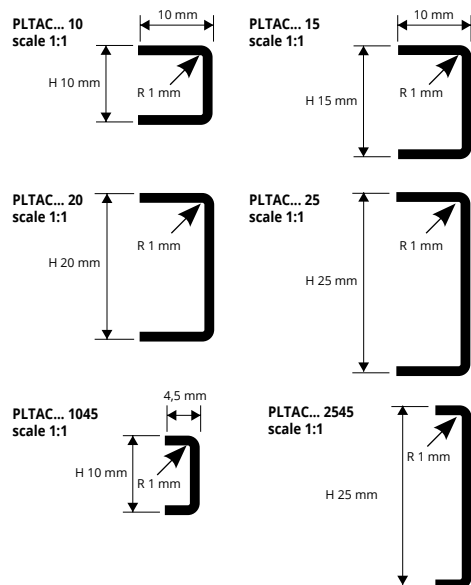

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

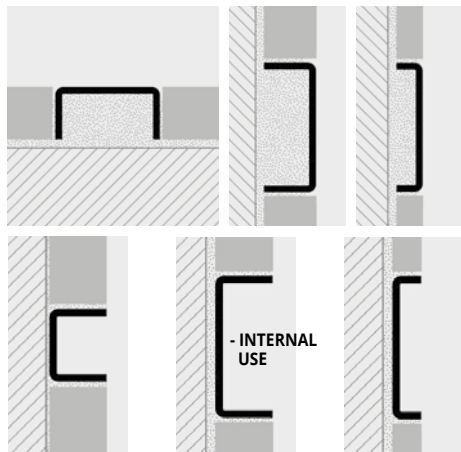

1. Choose "PROLISTEL ACC" according to the width and desired finish. 2. Cut "PROLISTEL ACC" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL ACC" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	HxL mm	€/lm	€/Pc
PLTAC 10	10 x 10	7,22	19,49
PLTAC 1045	10 x 4,5	6,91	18,66
PLTAC 15	15 x 10	9,61	25,95
PLTAC 20	20 x 10	12,82	34,61
PLTAC 25	25 x 10	16,03	43,28
PLTAC 2545	25 x 4,5	15,71	42,42 *

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A - INTERNAL USE
with protective film - bar length 2,7 lm
pack. 40 Pcs 108 lm - 8/10mm

Article	HxL mm	€/lm	€/Pc
PLTACI 10	10 x 10	7,22	19,49 *
PLTACI 1045	10 x 4,5	6,91	18,66 *
PLTACI 15	15 x 10	9,61	25,95 *
PLTACI 20	20 x 10	12,82	34,61 *
PLTACI 25	25 x 10	16,03	43,28 *
PLTACI 2545	25 x 4,5	15,71	42,42 *

Brushed STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 8/10mm

Article	HxL mm	€/lm	€/Pc
PLTACS 10	10 x 10	8,66	23,38
PLTACS 1045	10 x 4,5	8,81	23,79
PLTACS 15	15 x 10	12,50	33,75
PLTACS 20	20 x 10	16,65	44,95
PLTACS 25	25 x 10	18,46	49,84
PLTACS 2545	25 x 4,5	18,13	48,95 *

Brushed STAINLESS STEEL AISI 304/1.4301-V2A - INTERNAL USE
with protective film - bar length 2,7 lm pack. 40 Pcs 108 lm - 8/10mm

Article	HxL mm	€/lm	€/Pc
PLTACSI 10	10 x 10	8,66	23,38 *
PLTACSI 1045	10 x 4,5	8,81	23,79 *
PLTACSI 15	15 x 10	12,50	33,75 *
PLTACSI 20	20 x 10	16,65	44,95 *
PLTACSI 25	25 x 10	18,46	49,84 *
PLTACSI 2545	25 x 4,5	18,13	48,95 *

SANDED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 40 Pcs 108 lm - 8/10mm

Article	HxL mm	€/lm	€/Pc
PLTACSB 10	10 x 10	9,60	25,92 *

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.



PROLISTEL ACC is a range of decorative profiles/strips that are ideal for easily creating chromatic effects on ceramic tile/marble/mosaic coverings or, in the stainless steel AISI 316LL/1.4301-V4A range, for creating separations and decorations between floors in the same or differing material. Thanks to their design, shape and thickness of 4.5 and 10 mm, may be laid using the same adhesive to create horizontal and vertical lines, on the wall or on the floor, irrespective of the thickness of the covering. Various widths available in stainless steel AISI 04/1.4301-V2A, polished. Match with the same basic colours in the PROJOLLY, PROTERMINAL and PROJOLLY SQUARE and the new PROKERLAM SQUARE-LINE-JOLLY range.

PROLISTEL ACC

POLISHED STAINLESS STEEL
AISI 316L/1.4404 - V4A



POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A
with protective film - bar length 2,7 lm
pack. 40 Pcs - 108 lm - 8/10mm




Article	HxL mm	€/lm	€/Pc	
PLTACM 10	10 X 10	9,40	25,38	*
PLTACM 1045	10 X 4,5	8,97	24,22	*
PLTACM 15	15 X 10	12,50	33,75	*
PLTACM 20	20 X 10	16,66	44,98	*
PLTACM 25	25 X 10	20,84	56,27	*
PLTACM 2545	25 X 4,5	20,42	55,13	*




POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A -
INTERNAL USE with protective film - bar length 2,7 lm
pack. 40 Pcs - 108 lm - 8/10mm



Article	HxL mm	€/lm	€/Pc	
PLTACMI 10	10 X 10	9,40	25,38	*
PLTACMI 1045	10 X 4,5	8,97	24,22	*
PLTACMI 15	15 X 10	12,50	33,75	*
PLTACMI 20	20 X 10	16,66	44,98	*
PLTACMI 25	25 X 10	20,84	56,27	*
PLTACMI 2545	25 X 4,5	20,42	55,13	*

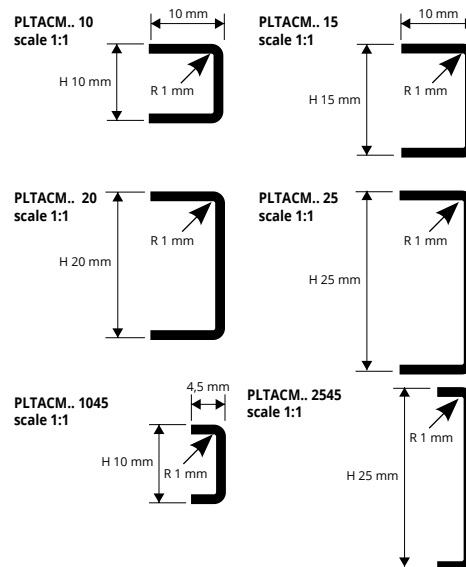

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

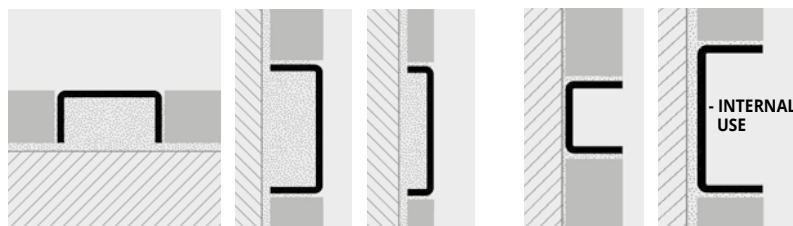

1. Choose the PROLISTEL ACC in the required width. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing it into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is flush with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids. Pay attention to the external edges of the PROLISTEL ACC. They must be protected against agents such as adhesives and sealants and against grinding or scraping actions.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

COLOURS




ACM - Polished stainless steel
AISI 316LL

PROLISTEL P OTT is a decorative listel in polished, chromed and antique brass with a flat visible surface. The profile is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes and two widths, make **PROLISTEL P OTT** a much sought after profile. It could be matched with PROJOLLY, PROJOLLY SQUARE e PROTERMINAL profiles to decorate the wall coverings and to allow an elegant workmanlike application.

PROLISTEL P OTT

POLISHED, CHROMED,
ANTIQUÉ BRASS



POLISHED, CHROMED AND ANTIQUE BRASS thermo packed - Bar
length 2,7 lm - pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pc	
PLTPOL 25	25	25,66	69,28	*
PLTPOC 25	25	38,04	102,71	*
PLTPOB 25	25	55,90	150,93	*

COLOURS



OL - Polished brass OC - Chromed brass OB - Antique brass

EXAMPLES AND INSTRUCTIONS FOR LAYING




1. Choose "PROLISTEL P OTT" according to the width and desired finish. 2. Cut "PROLISTEL P OTT" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL P OTT" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


PROLISTEL P ALL

ANODIZED, POLISHED, STONE LINE, BRUSHED, TUSCANY AND TILTEX ALUMINIUM

PROLISTEL P ALL is a decorative listel in anodized, polished, brushed, tiltex aluminium and varnished tuscany and stone aluminium with a flat visible surface. The profile is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes and two widths, make **PROLISTEL P ALL** a much sought after profile. It could be matched with PROJOLLY, PROJOLLY SQUARE e PROTERMINAL profiles to decorate the wall coverings and to allow an elegant workmanlike application.

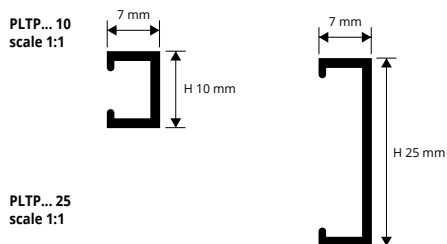

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

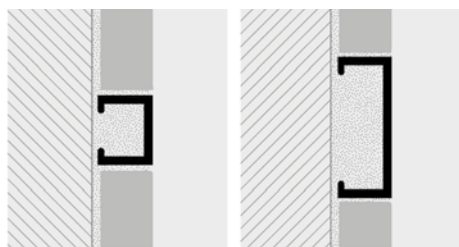

1. Choose "PROLISTEL P ALL" according to the width and desired finish. 2. Cut "PROLISTEL P ALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL P ALL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

ALUMINIUM TUSCANY LINE

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTPA 10-...TU	10	9,89	26,70
PLTPA 25-...TU	25	12,13	32,75

STONE LINE ALUMINIUM

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTPA 10-SL01	10	7,40	19,98
PLTPA 10-SL08	10	7,40	19,98
PLTPA 10-SL12	10	7,40	19,98
PLTPA 10-...	10	7,40	19,98
PLTPA 25-SL01	25	11,87	32,05
PLTPA 25-SL08	25	11,87	32,05
PLTPA 25-SL12	25	11,87	32,05
PLTPA 25-...	25	11,87	32,05



ANODIZED ALUMINIUM

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTPAA 10	10	4,85	13,10
PLTPAO 10	10	5,13	13,85
PLTPAR 10	10	6,70	18,09
PLTPAT 10	10	6,70	18,09
PLTPNE 10	10	6,78	18,31
PLTPAA 25	25	7,79	21,03
PLTPAO 25	25	8,15	22,01
PLTPAR 25	25	10,35	27,95
PLTPAT 25	25	9,07	24,49
PLTPNE 25	25	10,57	28,54

POLISHED ALUMINIUM

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTPBC 10	10	6,97	18,82
PLTPBO 10	10	7,31	19,74
PLTPBR 10	10	9,01	24,33
PLTPBT 10	10	9,01	24,33
PLTPBN 10	10	9,11	24,60
PLTPBC 25	25	10,08	27,22
PLTPBO 25	25	10,56	28,51
PLTPBR 25	25	11,36	30,67
PLTPBT 25	25	10,08	27,22
PLTPBN 25	25	11,62	31,37

POLISHED BRUSHED ALUMINIUM

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm





Article	H mm	€/lm	€/Pc
PLTPBS 10	10	7,02	18,95
PLTPBOS 10	10	7,37	19,90
PLTPRS 10	10	9,33	25,19
PLTPTS 10	10	9,33	25,19
PLTPNS 10	10	9,44	25,49
PLTPBS 25	25	10,08	27,22
PLTPBOS 25	25	10,56	28,51
PLTPRS 25	25	12,26	33,10
PLTPTS 25	25	12,26	33,10
PLTPNS 25	25	12,53	33,83

ANODIZED BRUSHED ALUMINIUM TILTEX

thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTPBX 10	10	10,86	29,32
PLTPRX 10	10	10,86	29,32
PLTPTX 10	10	10,86	29,32
PLTPBX 25	25	14,31	38,64
PLTPRX 25	25	14,31	38,64
PLTPTX 25	25	14,31	38,64

COLOURS

ANODIZED				POLISHED				BLACK LINE		
										
AA - Anodized silver aluminium	AR - Anodized copper aluminium	AT - Anodized titanium aluminium	AO - Anodized gold aluminium	BC - Polished chrome aluminium	BO - Polished gold aluminium	BR - Polished bronze aluminium	BT - Polished titanium aluminium	BN - Polished black aluminium	NE - Anodized black aluminium	NS - Polished brushed black aluminium
POLISHED BRUSHED				BRUSHED TILTEX				TUSCANY		
										
BS - Polished brushed aluminium	BOS - Polished brushed gold aluminium	TS - Polished brushed titanium aluminium	RS - Polished brushed copper aluminium	BX - Tiltex silver aluminium	TX - Tiltex titanium aluminium	RX - Tiltex copper aluminium	ON DEMAND	ON DEMAND	ON DEMAND	ON DEMAND
STONE LINE										
										
SL01 - Stone white	SL08 - Antrdark	SL12 - Stone black								

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks) **STONE LINE**

SL02 - Stone cream	SL03 - Stone greyvory	SL04 - Stone sand	SL05 - Stone gray	SL06 - Stone cristal gray	SL07 - Stone antragray	SL09 - Stone bronze	SL10 - Stone corten	SL11 - Stone brown	SL13 - Stone oyster gray

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

** = Production on demand with minimum quantity of 80 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROLISTEL ALL is a listel in anodized, polished and brushed aluminium with a rounded visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL P ALL** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.


PROLISTEL ALL

ANODIZED, POLISHED AND
BRUSHED ALUMINIUM



ANODIZED ALUMINIUM (silver-gold-copper-titanium-black)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTAA 15	15	5,73	15,47
PLTAR 15	15	7,01	18,93
PLTAT 15	15	7,01	18,93
PLTAO 15	15	5,73	15,47
PLTNE 15	15	7,10	19,17
PLTAA 25	25	7,15	19,31
PLTAR 25	25	9,12	24,62
PLTAT 25	25	9,12	24,62
PLTAO 25	25	7,15	19,31
PLTNE 25	25	9,25	24,98

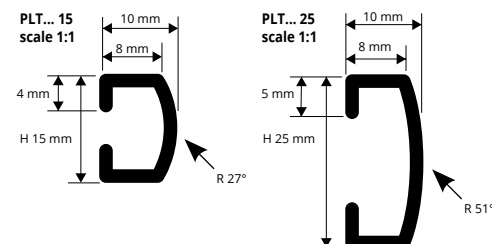

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROLISTEL ALL" according to the width and desired finish. 2. Cut "PROLISTEL ALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL ALL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

POLISHED ALUMINIUM (chrome-gold-copper-titanium-black)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTBC 15	15	7,02	18,95
PLTBR 15	15	8,68	23,44
PLTBT 15	15	8,68	23,44
PLTBO 15	15	7,02	18,95
PLTBN 15	15	8,78	23,71
PLTBC 25	25	9,58	25,87
PLTBR 25	25	11,25	30,38
PLTBT 25	25	11,25	30,38
PLTBO 25	25	9,58	25,87
PLTBN 25	25	11,37	30,70

BRUSHED POLISHED ALUMINIUM (silver-gold-copper-titanium-black)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PLTBS 15	15	9,19	24,81
PLTRS 15	15	11,25	30,38
PLTTS 15	15	11,25	30,38
PLTBS 15	15	9,19	24,81
PLTNS 15	15	11,37	30,70
PLTBS 25	25	10,14	27,38
PLTRS 25	25	12,08	32,62
PLTTS 25	25	12,08	32,62
PLTBOS 25	25	10,14	27,38
PLTNS 25	25	12,21	32,97

COLOURS

ANODIZED			POLISHED		BRUSHED POLISHED	
AA - Anodized silver alum.	AT - Anodized titanium alum.	NE - Anodized black alum.	BC - Polished chrome alum.	BT - Polished titanium alum.	BS - Brushed polished silver alum.	TS - Brushed Polished titanium alum.

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)


ANODIZED			POLISHED		BRUSHED POLISHED		
AO - Anodized Gold alum.	AR - Anodized copper alum.	BO - Polished Gold alum.	BR - Polished copper alum.	BN - Polished black alum.	BOS - Brushed Gold alum.	RS - Brushed Polished copper alum.	NS - Brushed Polished black alum.

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal quantity, timing and price.


PROLISTEL LED is a listel in anodized and polished aluminium equipped with an integrated LED lighting system that can generate a cold, hot and neutral suffused light. It is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL LED** a much sought after profile that decorates the wall coverings.

PROLISTEL LED

ANODIZED AND POLISHED ALUMINIUM



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

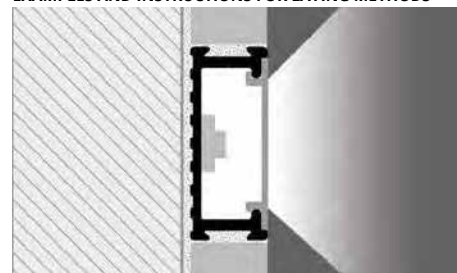

1. Choose "PROLISTEL LED" according to the width and desired finish. 2. Cut "PROLISTEL LED" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press "PROLISTEL LED" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

ANODIZED ALUM. SILVER, POLISHED CHROME ALUMINIUM
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm
ADAPTOR LED, LED & FLAT NOT INCLUDED

Article	H mm	€/lm	€/Pc
PLTLEDAA 20	20	11,82	31,91
PLTLEDBC 20	20	13,37	36,10

ADHESIVE FLEXIBLE LED COIL
length 5 lm - pack. 1 ROLL

Article	€/lm	€/Pack
LEDN	21,40	107,00
LEDF	21,40	107,00
LEDC	21,40	107,00

COLOURS

AA - Anodized silver alum.	BC - Polished chrome alum.
----------------------------	----------------------------

POLYCARBONATE FLAT bar length 2,7 lm - pack. 20 Pc - 54 lm
(AL = transparent / AO = matt)

Article	€/lm	€/Pc
PIAL 17	4,91	13,26
PIAO 17	4,91	13,26

END CAPS - R/L (3 right & 3 left)

Article	H mm	€/Pack
TPLTLEDAA 20	20	20,86
TPLTLEDBC 20	20	20,86

LED ADAPTOR AC/DC 75W - 12V (15 lm)

Article	€/Pc
ALL 7512	78,35

LED ADAPTOR AC/DC 25W - 12V (5 lm)

Article	€/Pc
ALL 2512	53,73


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


PROFINLIST 20

ANODIZED, POLISHED, BRUSHED
AND TILTEX ALUMINIUM

PROFINLIST 20 is a listel in anodized, polished, brushed and tiltex aluminium with a flat visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROFINLIST 20** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.

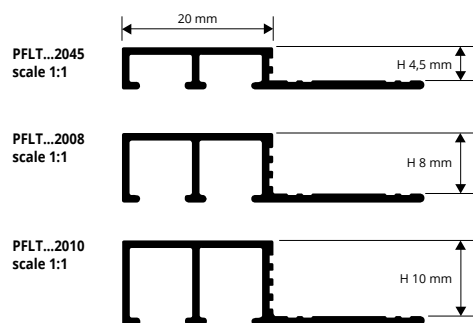

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

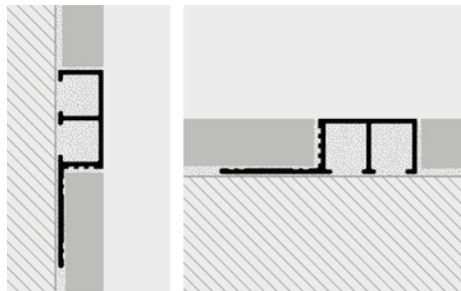

1. Choose "PROFINLIST 20" according to the width and desired finish. 2. Cut "PROFINLIST 20" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROFINLIST 20" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



ANODIZED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc	
PFLTAA 2045	4,5	7,73	20,87	*
PFLTAA 2008	8	7,79	21,03	
PFLTAR 2008	8	9,26	25,00	*
PFLTAT 2008	8	9,26	25,00	*
PFLTAA 2010	10	7,98	21,55	
PFLTAR 2010	10	9,51	25,68	*
PFLTAT 2010	10	9,51	25,68	*

BRUSHED POLISHED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc	
PFLTBS 2045	4,5	10,73	28,97	*
PFLTBS 2008	8	11,18	30,19	
PFLTRS 2008	8	13,73	37,07	*
PFLTTS 2008	8	13,73	37,07	*
PFLTBS 2010	10	11,43	30,86	
PFLTRS 2010	10	14,00	37,80	*
PFLTTS 2010	10	14,00	37,80	*
PFLTBS 2010	10	10,96	29,59	

POLISHED ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc	
PFLTBC 2045	4,5	9,01	24,33	*
PFLTBO 2045	4,5	9,37	25,30	
PFLTBC 2008	8	9,58	25,87	
PFLTBR 2008	8	11,18	30,19	*
PFLTBT 2008	8	9,58	25,87	*
PFLTBC 2010	10	9,79	26,43	
PFLTBO 2010	10	9,96	26,89	
PFLTBR 2010	10	11,43	30,86	*
PFLTBT 2010	10	9,79	26,43	*

BRUSHED TILTEX ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc	
PFLTBX 2008	8	12,33	33,29	*
PFLTRX 2008	8	15,07	40,69	*
PFLTXX 2008	8	15,07	40,69	
PFLTBR 2010	10	12,51	33,78	*
PFLTRX 2010	10	15,39	41,55	*
PFLTXX 2010	10	15,39	41,55	*


COLOURS

ANODIZED



AA - Satin anodized silver alu.

POLISHED



BC - Polished chrome alu.



BO - Polished gold alu.

BRUSHED POLISHED



BS - Brushed silver alu.




BOS - Brushed gold alu.

ANOD. BRUSHED TILTEX



BX - Silver TILTEX

ANODIZED




AR - Anodized copper alu.



AT - Anodized titanium alu.

POLISHED



BR - Polished copper alu.




BT - Polished titanium alu.

SPAZZ. BRILLANT.



RS - All. spazz. brill. rame



TS - All. spazz. brill. titanio

ANOD. SPAZZOLATI TILTEX



RX - Brushed tiltex copper alu.



TX - Titanium tiltex

PROBORD is a round corner bead profile in polished and brushed stainless steel AISI 304/1.4301-V2A suitable to protect the external corner of wall coverings in ceramic. Its particular section and availability in different finishes, make **PROBORD** a much sought after profile. It can be used with the range of PROLISTEL and PROSHELL profiles to obtain an elegant workmanlike application even in environments subject to high mechanical stresses.

PROBORD

POLISHED AND BRUSHED STAINLESS STEEL
AISI 304/1.4301-V2A



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm - 10/10mm

Article	H mm	€/lm	€/Pc
PEBDAC 08	08	19,80	53,46
PEBDAC 10	10	20,56	55,51
PEBDAC 125	12,5	21,08	56,92

BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm - 10/10mm

Article	H mm	€/lm	€/Pc
PEBDACS 08	08	23,18	62,59
PEBDACS 10	10	23,81	64,29
PEBDACS 125	12,5	24,58	66,37


COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A
ACS - Brushed stainless steel AISI 304/1.4301-V2A


SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

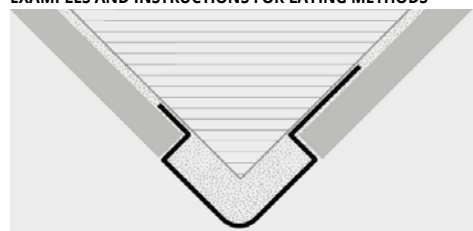


1. Choose "PROBORD" according to the tile thickness and desired finish. 2. Cut "PROBORD" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROBORD" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.


PEBDAC/ACS 08
scale 1:1

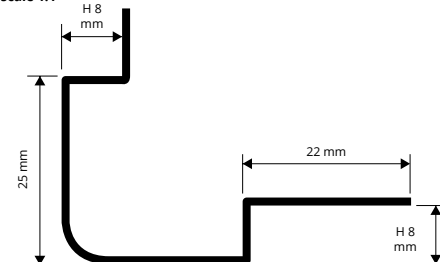

PEBDAC/ACS 10
scale 1:1

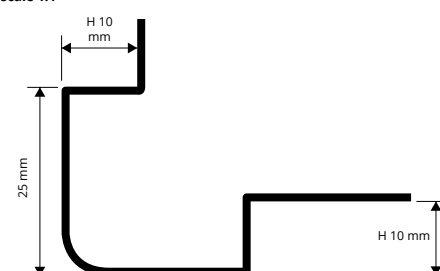

PEBDAC/ACS 125
scale 1:1

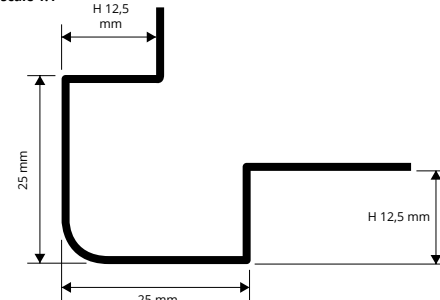

PROEDGE FLEX

SHOCKPROOF NON - TOXIC CO-EXTRUDED
COLORED VINYL RESIN



CO-EXTRUDED PVC - L 40 X 40 mm
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	H mm	€/lm	€/Pc
PFC...40	40	7,92	21,38

CO-EXTRUDED PVC WITH ADHESIVE - L 40 X 40 mm
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	H mm	€/lm	€/Pc
PFC...40A	40	10,61	28,65

COLOURS



01 - White

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)




09 - Yellow

10 - Red

11 - Black

16 - Blue

PFC... 40/40A
scale 1:2



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose "PROEDGE FLEX" according to the desired colour. 2. Cut "PROEDGE FLEX" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film (version with adhesive), place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

PROEDGE AC

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROEDGE AC is a corner bead profile in polished and brushed stainless steel AISI 304/1.4301-V2A, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE AC** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

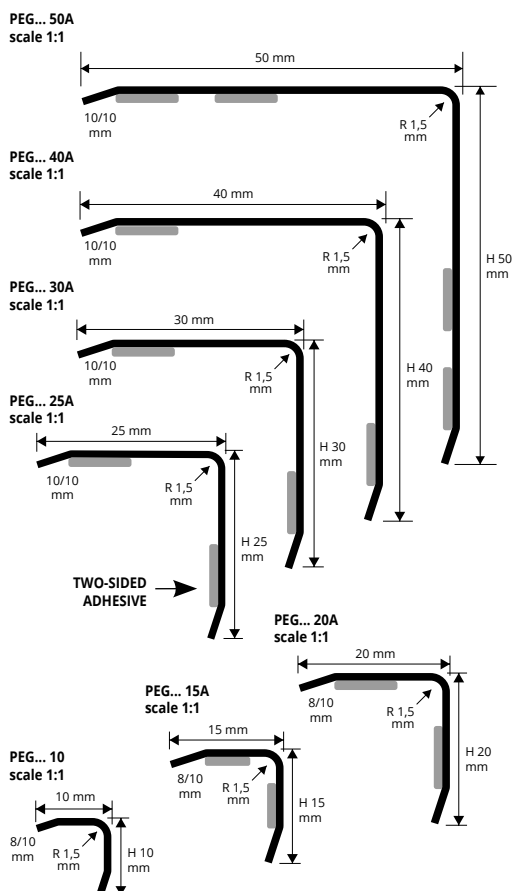

POLISHED AND BRUSHED STAINLESS STEEL
with protective film - bar length 2,7 lm - pack. 81 lm - 8/10 mm

Article	LxH mm	€/lm	€/Pc
PEGAC 10	10 x 10	6,50	17,55
PEGACS 10	10 x 10	8,34	22,52

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 81 lm - 8/10 mm

Article	LxH mm	€/lm	€/Pc
PEGAC 15A	15 x 15	9,58	25,87
PEGACS 15A	15 x 15	11,43	30,86
PEGAC 20A	20 x 20	10,86	29,32
PEGACS 20A	20 x 20	12,72	34,34

For items without adhesive, write the item without the last A.
E.g.: PEGAC 15 and deduct 1,50 €/lm from the gross price.

COLOURS



Suitable for use in contact with foodstuffs.



POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 40,5 lm - 10/10 mm

Article	LxH mm	€/lm	€/Pc
PEGAC 25A	25 x 25	12,14	32,78
PEGACS 25A	25 x 25	14,04	37,91
PEGAC 30A	30 x 30	17,24	46,55
PEGACS 30A	30 x 30	19,50	52,65

For items without adhesive write the item without the last A.
E.g.: PEGAC 10 and deduct 1,50 €/lm from the gross price.

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 27 lm - 10/10 mm

Article	LxH mm	€/lm	€/Pc
PEGAC 40A	40 x 40	21,84	58,97
PEGACS 40A	40 x 40	24,74	66,80
PEGAC 50A	50 x 50	25,41	68,61
PEGACS 50A	50 x 50	27,46	74,14

For items without adhesive, write the item without the last A.
E.g.: PEGAC 40 and deduct 1,50 €/lm from the gross price.


PEG... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

PROEDGE OT

POLISHED AND CHROMED BRASS

PROEDGE OT is a corner bead profile in polished and chromed brass, with a radius of curvature of 1.5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE OT** a much sought-after profile that allows an elegant workmanlike application.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

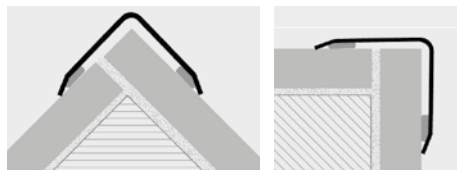

1. Choose "PROEDGE OT" according to the desired finish and width.
2. Cut "PROEDGE OT" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS



POLISHED AND CHROMED BRASS
bar length 2,7 lm - pack. 54 lm - 8/10 mm

Article	LxH mm	€/lm	€/Pc
PEGOL 10	10 x 10	10,35	27,95
PEGOC 10	10 x 10	14,68	39,64

POLISHED AND CHROMED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 54 lm - 8/10 mm

Article	LxH mm	€/lm	€/Pc
PEGOL 15A	15 x 15	11,82	31,91
PEGOC 15A	15 x 15	17,56	47,41
PEGOL 20A	20 x 20	15,14	40,88
PEGOC 20A	20 x 20	21,65	58,45
PEGOC 25A	25 x 25	24,70	66,69
PEGOC 30A	30 x 30	28,79	77,73

For items without adhesive, write the item without the last A.
E.g.: PEGOL 15 and deduct 1,50 €/lm from the gross price.

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.



POLISHED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 27 lm - 10/10 mm

Article	LxH mm	€/lm	€/Pc
PEGOL 25A	25 x 25	15,97	43,12
PEGOL 30A	30 x 30	21,71	58,62

POLISHED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 27 lm - 12/10 mm

Article	LxH mm	€/lm	€/Pc
PEGOL 40A	40 x 40	27,46	74,14
PEGOL 50A	50 x 50	35,12	94,82

PEG... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A.
E.g.: PEGOL 40 and deduct 1,50 €/lm from the gross price.

PROEDGE R AC is a corner bead profile in polished and brushed stainless steel AISI 304/1.4301-V2A, with a radius of curvature of 5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE R AC** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PROEDGE R AC

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 81 lm - 8/10 mm

Article	LxH mm	€/lm	€/Pc
PEGRAC 15A	15 x 15	9,58	25,87 *
PEGRACS 15A	15 x 15	11,43	30,86 *
PEGRAC 20A	20 x 20	10,86	29,32 *
PEGRACS 20A	20 x 20	12,72	34,34 *

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 40,5 lm - 10/10 mm

Article	LxH mm	€/lm	€/Pc
PEGRAC 25A	25 x 25	12,14	32,78 *
PEGRACS 25A	25 x 25	14,04	37,91 *
PEGRAC 30A	30 x 30	17,24	46,55 *
PEGRACS 30A	30 x 30	19,50	52,65 *

For items without adhesive write the item without the last A.
E.g.: PEGRAC 15 and deduct 1,50 €/lm from the gross price.

Suitable for use in contact with foodstuffs.

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 27 lm - 10/10 mm


Article	LxH mm	€/lm	€/Pc
PEGRAC 40A	40 x 40	21,84	58,97 *
PEGRACS 40A	40 x 40	24,74	66,80 *
PEGRAC 50A	50 x 50	25,41	68,61 *
PEGRACS 50A	50 x 50	27,46	74,14 *

PEGR... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A.
E.g.: PEGRAC 40 and deduct 1,50 €/lm from the gross price.

COLOURS

	
AC - Polished stainless steel AISI 304/1.4301-V2A	ACS - Brushed stainless steel AISI 304/1.4301-V2A

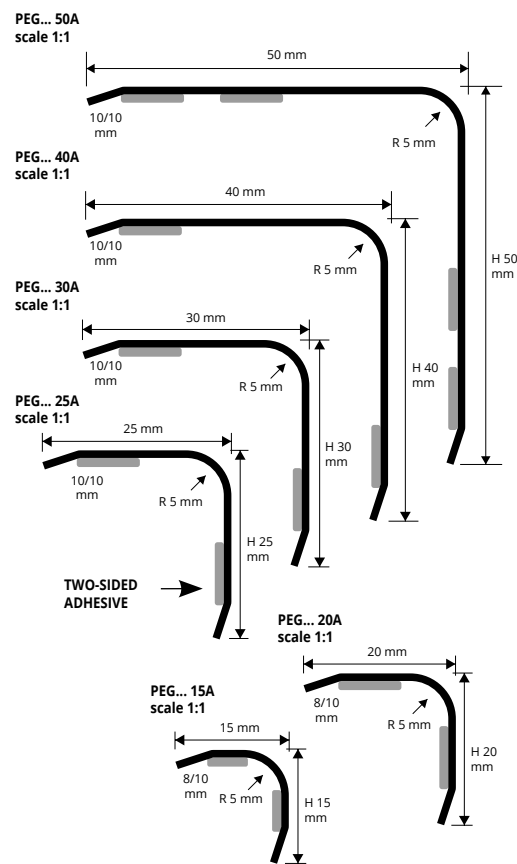

PROEDGE R OT is a corner bead profile in polished and chromed brass, with a radius of curvature of 5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE R OT** a much sought-after profile that allows an elegant workmanlike application.

PROEDGE R OT

POLISHED AND CHROMED BRASS



CHROMED BRASS WITH ADHESIVE
thermo packed - bar length 2,7 lm - pack. 54 lm

Article	LxH mm	€/lm	€/Pc
PEGROC 15A	15 x 15	17,56	47,41 *
PEGROC 20A	20 x 20	21,65	58,45 *
PEGROC 25A	25 x 25	24,70	66,69 *
PEGROC 30A	30 x 30	28,79	77,73 *

POLISHED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 54 lm - 8/10 mm

Article	LxH mm	€/lm	€/Pc
PEGROL 15A	15 x 15	11,82	31,91 *
PEGROL 20A	20 x 20	15,14	40,88 *

For items without adhesive, write the item without the last A.
E.g.: PEGROL 15 and deduct 1,50 €/lm from the gross price.

POLISHED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 27 lm - 10/10 mm

Article	LxH mm	€/lm	€/Pc
PEGROL 25A	25 x 25	15,25	41,18 *
PEGROL 30A	30 x 30	20,72	55,94 *


POLISHED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 27 lm - 12/10 mm

Article	LxH mm	€/lm	€/Pc
PEGROL 40A	40 x 40	27,46	74,14 *
PEGROL 50A	50 x 50	35,12	94,82 *

PEGR... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A.
E.g.: PEGROL 25 and deduct 1,50 €/lm from the gross price.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

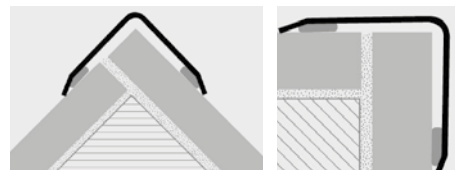

1. Choose "PROEDGE R OT" according to the desired finish and width.
2. Cut "PROEDGE R OT" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS

	
OC - Chromed brass	OL - Polished Brass


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROEDGE AL

ANODIZED AND VARNISHED ALUMINIUM

PEG... 25A
PEGA 25-01A
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROEDGE AL" according to the desired finish and width.
2. Cut "PROEDGE AL" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

PROEDGE AL is a corner bead profile in anodized and varnished aluminum suitably shaped to protect the external corner of wall coverings. Its particular section and the availability in four different finishes make **PROEDGE AL** a much sought-after profile that allows a workmanlike application.



ANODIZED ALUM. (gold, silver and bronze) **WITH ADHESIVE**
thermo packed - bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	LxH mm	€/lm	€/Pc
PEGAO 25A	25 x 25	6,76	18,25
PEGAA 25A	25 x 25	6,76	18,25
PEGAB 25A	25 x 25	6,76	18,25

For items without adhesive, write the article without the last A.
E.g.: PEGAO 25 and deduct 1,50 €/lm from the gross price.

WHITE VARNISHED ALUMINIUM - WITH ADHESIVE
thermo packed - bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	LxH mm	€/lm	€/Pc
PEGA 25-01A	25 x 25	8,43	22,76

COLOURS

ANODIZED


AO - Anodized gold alum.	AA - Anodized silver alum.	AB - Anod. bronze alum.

01 - White varnished alum.

PROEDGE PVC

SHOCKPROOF NON - TOXIC CO-EXTRUDED
WHITE VINYL RESIN

PROEDGE PVC is a corner bead profile in shockproof non-toxic co-extruded white vinyl resin suitably shaped to protect the external corner of wall coverings. Its particular section and the availability in four different widths make **PROEDGE PVC** a much sought-after profile that allows a workmanlike application.

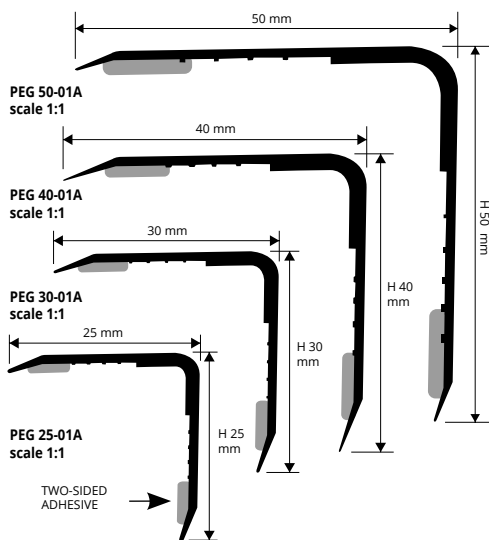

SHOCKPROOF VINYL RESIN WITH ADHESIVE
bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	LxH mm	€/lm	€/Pc
PEG 25-01A	25 x 25	5,71	15,42
PEG 30-01A	30 x 30	6,47	17,47

SHOCKPROOF VINYL RESIN WITHOUT ADHESIVE
bar length 2,7 lm - pack. 30 Pcs - 81 lm

Article	LxH mm	€/lm	€/Pc
PEG 25-01	25 x 25	3,90	10,53
PEG 30-01	30 x 30	4,66	12,58

SHOCKPROOF VINYL RESIN WITH ADHESIVE
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	LxH mm	€/lm	€/Pc
PEG 40-01A	40 x 40	7,22	19,49
PEG 50-01A	50 x 50	7,99	21,57

SHOCKPROOF VINYL RESIN WITHOUT ADHESIVE
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	LxH mm	€/lm	€/Pc
PEG 40-01	40 x 40	5,41	14,61
PEG 50-01	50 x 50	6,18	16,69

COLOURS

01 - White

**FOR OTHER COLORS MINIMUM
ORDER 400 pcs**

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROEDGE PVC" according to the desired width. 2. Cut "PROEDGE PVC" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.




PROSHELL


POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A

PROSHELL is a cove-shaped profile in polished and brushed stainless steel AISI 304/1.4301-V2A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

internal seal hygienic profiles

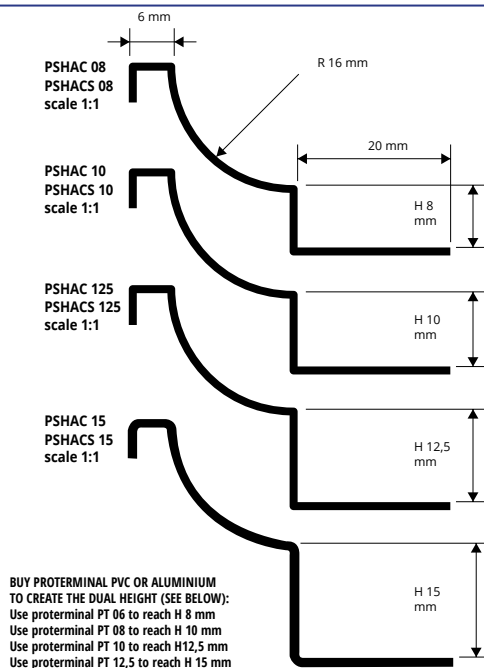

EXAMPLES FOR LAYING

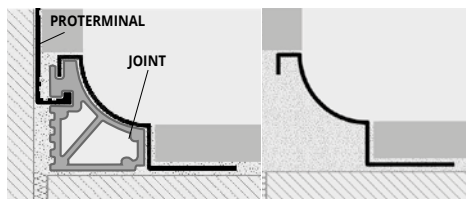

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
- bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PSHAC 08	8	17,24	46,55
PSHAC 10	10	18,13	48,95
PSHAC 125	12,5	19,30	52,11
PSHAC 15	15	20,31	54,84

Suitable for use in contact with foodstuffs.

INSTRUCTIONS FOR LAYING

1. Choose "PROSHELL" according to the tile thickness and desired finish. (*) 2. Cut "PROSHELL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.



BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film - bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm


Article	H mm	€/lm	€/Pc
PSHACS 08	8	19,16	51,73
PSHACS 10	10	20,13	54,35
PSHACS 125	12,5	20,56	55,51
PSHACS 15	15	21,84	58,97

COLOURS



PREWELDED CORNER, CAPS and THREE-WAYS JOINTS

POLISHED AND BRUSHED STAINLESS STEEL

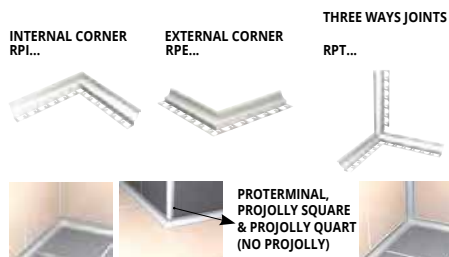

PREWELDED CORNER - POLISHED STAINLESS STEEL

L 100 mm - pack. 10 Pcs

Article	H mm	€/Pc.	€/Pack
RPI .../10	08/10/125	20,82	208,22
RPI 15/10	15	22,09	220,92
RPE .../10	08/10/125	20,82	208,22
RPE 15/10	15	22,09	220,92
RPT .../10	08/10/125	27,59	275,94
RPT 15/10	15	28,74	287,38

Specify height of joint: E.g.: RPI 8 for H 8 mm.

PREWELDED CORNER - BRUSHED STAINLESS STEEL

L 100 mm - pack. 10 Pcs

Article	H mm	€/Pc.	€/Pack
RPIS .../10	08/10/125	22,35	223,55
RPIS 15/10	15	23,51	235,10
RPE .../10	08/10/125	22,35	223,55
RPE 15/10	15	23,51	235,10
RPTS .../10	08/10/125	28,74	287,38
RPTS 15/10	15	30,40	303,98

Specify height of joint: E.g.: RPIS 8 for H 8 mm.



OVERLAPPING JOINTS

POLISHED AISI 316/.4404 V4A STAINLESS STEEL - pack. 10 Pcs


Article	€/Pc.	€/Pack
RPSIACM/10	8,39	83,90
RPSEACM/10	8,39	83,90
RPSTACM/10	8,39	83,90
GPSACM/10	3,86	38,64
TPSACM/10	3,86	38,64

OVERLAPPING JOINTS


BRUSHED AISI 316/.4404 V4A STAINLESS STEEL - pack. 10 Pcs

Article	€/Pc.	€/Pack
RPSIACMS/10	8,81	88,10
RPSEACMS/10	8,81	88,10
RPSTACMS/10	8,81	88,10
GPSACMS/10	4,04	40,43
TPSACMS/10	4,04	40,43

END CAPS

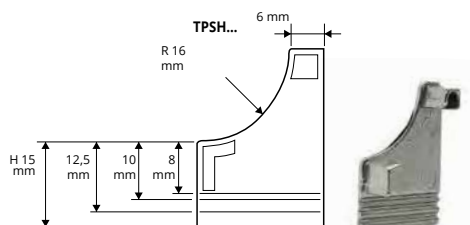

JOINT GISHN...

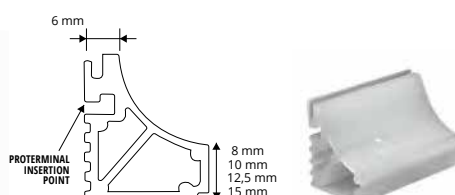

CAPS AND JOINTS IN RIGID GREY PLASTIC

pack. 10 Pcs

Article	€/Pc.	€/Pack
TPSHAC/10	4,48	44,84
TPSHACS/10	4,48	44,84
GISHN 08/10	3,84	38,43
GISHN 10/10	4,21	42,11
GISHN 125/10	4,61	46,09
GISHN 15/10	5,06	50,61

PROSHELL is a cove-shaped profile in polished and brushed stainless steel AISI 316L/1.4404-V4A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PROSHELL

POLISHED AND BRUSHED
STAINLESS STEEL AISI 316L/1.4404-V4A



POLISHED STAINLESS STEEL AISI 316L/1.4404-V4A
with protective film
- bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm




Article	H mm	€/lm	€/Pc
PSHACM 08	8	22,41	60,51
PSHACM 10	10	23,58	63,67
PSHACM 125	12,5	25,08	67,72
PSHACM 15	15	26,41	71,31



BRUSHED STAINLESS STEEL AISI 316L/1.4404-V4A
with protective film
- bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm



Article	H mm	€/lm	€/Pc
PSHACMS 08	8	24,91	67,26
PSHACMS 10	10	26,17	70,66
PSHACMS 125	12,5	26,73	72,17
PSHACMS 15	15	28,40	76,68

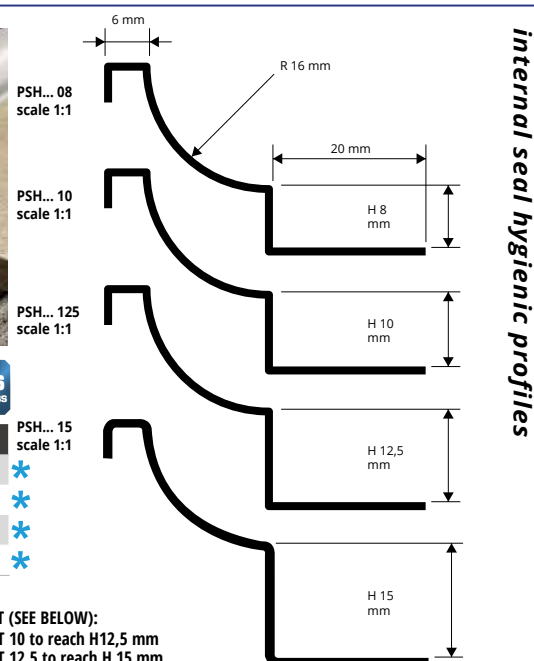

internal seal hygienic profiles

Suitable for use in contact with foodstuffs.

COLOURS



BUY PROTERMINAL PVC OR ALUMINIUM TO CREATE THE DUAL HEIGHT (SEE BELOW):

Use proterminal PT 06 to reach H 8 mm


Use proterminal PT 10 to reach H12,5 mm

Use proterminal PT 08 to reach H 10 mm

Use proterminal PT 12,5 to reach H 15 mm

EXAMPLES AND INSTRUCTIONS FOR LAYING

1. Choose "PROSHELL" according to the tile thickness and desired finish. (*) 2. Cut "PROSHELL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.

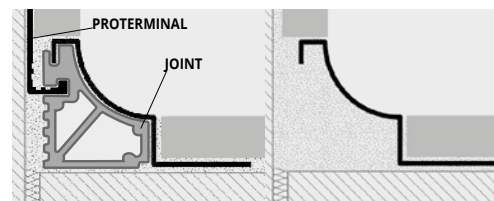

PREWELDED CORNER, CAPS and THREE-WAYS JOINTS

POLISHED AND BRUSHED STAINLESS STEEL

PREWELDED CORNER - POLISHED STAINLESS STEEL
L 100 mm - pack. 10 Pcs

Article	H mm	€/Pc.	€/Pack
RPIACM .../10	08/10/125	27,07	270,70
RPIACM 15/10	15	28,73	287,30
RPEACM .../10	08/10/125	27,07	270,70
RPEACM 15/10	15	28,73	287,30
RPTACM .../10	08/10/125	35,92	359,20
RPTACM 15/10	15	37,36	373,60

Specify height of joint: E.g.: RPI 8 for H 8 mm.

PREWELDED CORNER - BRUSHED STAINLESS STEEL
L 100 mm - pack. 10 Pcs

Article	H mm	€/Pc.	€/Pack
RPIACMS .../10	08/10/125	29,05	290,50
RPISACMS 15/10	15	30,57	305,70
RPEACMS .../10	08/10/125	29,05	290,50
RPEACMS 15/10	15	30,57	305,70
RPTSACMS .../10	08/10/125	37,36	373,60
RPTSACMS 15/10	15	39,51	395,10

Specify height of joint: E.g.: RPIS 8 for H 8 mm.

OVERLAPPING JOINTS

POLISHED AISI 316/1.4404 V4A STAINLESS STEEL - pack. 10 Pcs

Article	€/Pc.	€/Pack
RPSIACM/10	8,39	83,90
RPSEACM/10	8,39	83,90
RPSTACM/10	8,39	83,90
GPSACM/10	3,86	38,60
TPSACM/10	3,86	38,60

OVERLAPPING JOINTS

BRUSHED AISI 316/1.4404 V4A STAINLESS STEEL - pack. 10 Pcs



Article	€/Pc.	€/Pack
RPSIACMS/10	8,81	88,10
RPSEACMS/10	8,81	88,10
RPSTACMS/10	8,81	88,10
GPSACMS/10	4,04	40,40
TPSACMS/10	4,04	40,40

INTERNAL CORNER EXTERNAL CORNER THREE WAYS CORNER



CAPS AND JOINTS IN RIGID GREY PLASTIC
pack. 10 Pcs

Article	€/Pc.	€/Pack
TPSHAC/10	4,48	44,80
TPSHACS/10	4,48	44,80
GISHN 08/10	3,84	38,40
GISHN 10/10	4,21	42,10
GISHN 125/10	4,61	46,10
GISHN 15/10	5,06	50,60



*** = Production on demand with minimum quantity of 20 pcs. Production delay 4/5 weeks. Price to be agreed

* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.


News 2021

PROSHELL ALL


ANODIZED, POLISHED AND
VARNISHED ALUMINIUM

PROSHELL ALL is a cove-shaped profile in anodized, polished and varnished aluminium particularly suitable to ensure cleanliness and hygiene in indoors environment where good resistance to mechanical and chemical stresses are required. Its particular section and the availability in three finishes, three heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSHELL ALL** a much sought-after profile that allows a workmanlike application.


PSH... 8
scale 1:1

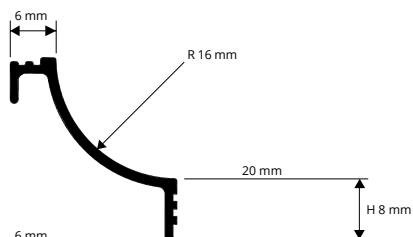

PSH... 10
scale 1:1

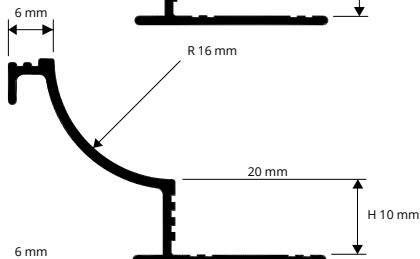

PSH... 125
scale 1:1

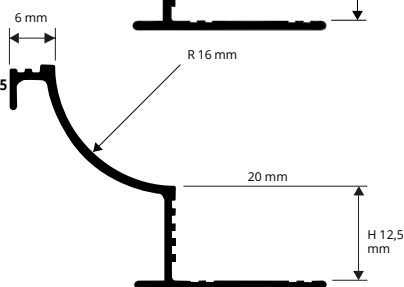

BUY PROTERMINAL PVC OR ALUMINIUM
TO CREATE THE DUAL HEIGHT (SEE NEXT PIC):
Use proterminal PT 08 to reach H 10 mm
Use proterminal PT 10 to reach H 12,5 mm
Use proterminal PT 12,5 to reach H 15 mm




ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSHAA 08	8	10,21	27,57
PSHAA 10	10	10,32	27,86
PSHAA 125	12,5	10,50	28,35

VARNISHED WHITE ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSHA 08-01	8	12,06	32,56
PSHA 10-01	10	12,18	32,89
PSHA 125-01	12,5	14,19	38,31

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

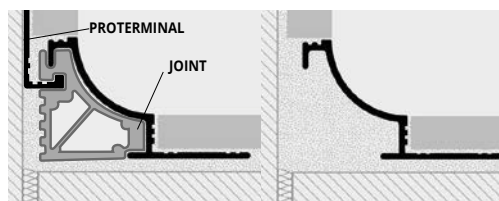

POLISHED CHROME ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PSHBC 08	8	14,18	38,29
PSHBC 10	10	14,43	38,96
PSHBC 125	12,5	14,74	39,80

COLOURS

Article	Color
AA - Anod. Silver alum.	[Image of silver anodized finish]
BC - Polished chrome alum.	[Image of polished chrome finish]
01 - White varnished alum.	[Image of white varnished finish]

1. Choose "PROSHELL ALL" according to the tile thickness and desired finish. 2. Cut "PROSHELL ALL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSHELL ALL" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile. (*) to obtain double height, use the joint of the same size as the selected profile and choose the PROTERMINAL PVC or ALUMINIUM according to the required thickness, see INSTRUCTIONS FOR LAYING.

CORNERS, END CAPS and JOINTS

SILVER ANODIZED, POLISHED CHROME AND VARNISHED WHITE ALUMINIUM / PLASTIC

* accessories of the on demand profiles are also on demand



INTERNAL CORNER
RPSHIA.../...

EXTERNAL CORNER
RPSHEA.../...



END CAP
TPSH.../...

JOINT
GISHN.../...



EXTERNAL/INTERNAL CORNER - ANODIZED SILVER ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
RPSHIAA .../...	08/10/125	179,07	39,40
RPSHEAA .../...	08/10/125	179,07	39,40

EXTERNAL/INTERNAL CORNER VARNISHED WHITE ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
RPSHIA ...-01/...	08/10/125	223,87	49,26
RPSHEA ...-01/...	08/10/125	223,87	49,26

JOINTS IN RIGID GREY PLASTIC - pack. 10 Pcs

Article	H mm	€/Pack
GISHN 08/...	8	38,27
GISHN 10/...	10	42,14
GISHN 125/...	12,5	46,00

EXTERNAL/INTERNAL CORNER POLISHED CHROME ALUMINIUM

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
RPSHIBC .../...	08/10/125	213,97	47,07
RPSHEBC .../...	08/10/125	213,97	47,07

CAPS - ANODIZED SILVER ALUMINIUM/POLISHED CHROME/VARNISHED WHITE ALUM.

Article	H mm	€/Pack 10 Pcs	€/Pack 2 Pcs
TPSHAA 08/...	8	111,45	24,51
TPSHBC 08/...	8	139,35	30,65
TPSHA 08/...	8	146,71	32,29
TPSHAA 10/...	10	111,45	24,51
TPSHBC 10/...	10	139,35	30,65
TPSHA 10/...	10	146,71	32,29
TPSHAA 125/...	12,5	111,45	24,51
TPSHBC 125/...	12,5	139,35	30,65
TPSHA 125/...	12,5	140,05	30,83

Choose the desired packaging. E.g.: TPSH... ...-01/5 (Pack 10 Pcs)
TPSH... ...-01/1 (Pack 2 Pcs)



PROSGUSCIO DA is a cove-shaped profile in shockproof non - toxic coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section, the availability in three finishes, four heights and special pieces, such as internal and external corners, end caps and junctions, make **PROSGUSCIO DA** a much sought-after profile that allows a workmanlike application.

PROSGUSCIO DA

SHOCKPROOF NON - TOXIC COLOURED
VINYL RESIN



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

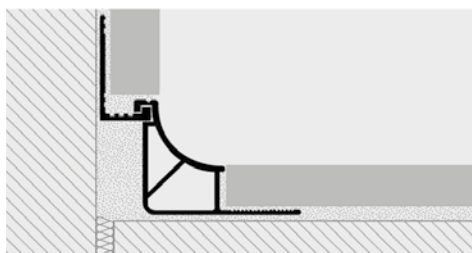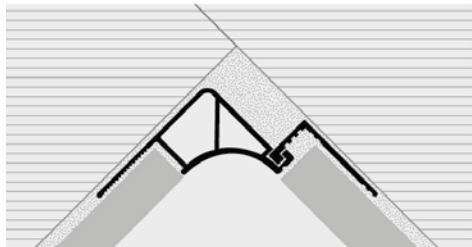

1. Choose "PROSGUSCIO DA" according to the tile thickness and desired colour. 2. Cut "PROSGUSCIO DA" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROSGUSCIO DA" into the adhesive. 4. Lay the tiles on floor and wall aligning them with the profile leaving a 2 mm joint. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation.

NON-TOXIC SHOCKPROOF VINYL RESIN

bar length 2,5 lm - pack. 20 Pc - 50 lm

Article	H mm	€/lm	€/Pc
PS 06-...	6	3,83	9,57
PS 08-...	8	4,16	10,40
PS 10-...	10	4,34	10,85
PS 125-...	12,5	4,80	12,00


H 06 available in the colours: 01-04.

H 08, H 10 and H 125 available in the colours: 01-03-04.

The code of the selected colour must be added to the article code. E.g.: PS 06-... (chosen colour white) PS 06-01. The interchangeable flange corresponds to white Proterminal pvc H 6-8-10 mm.

COLOURS

01 - White	03 - Cement gray	04 - Light Beige
------------	------------------	------------------

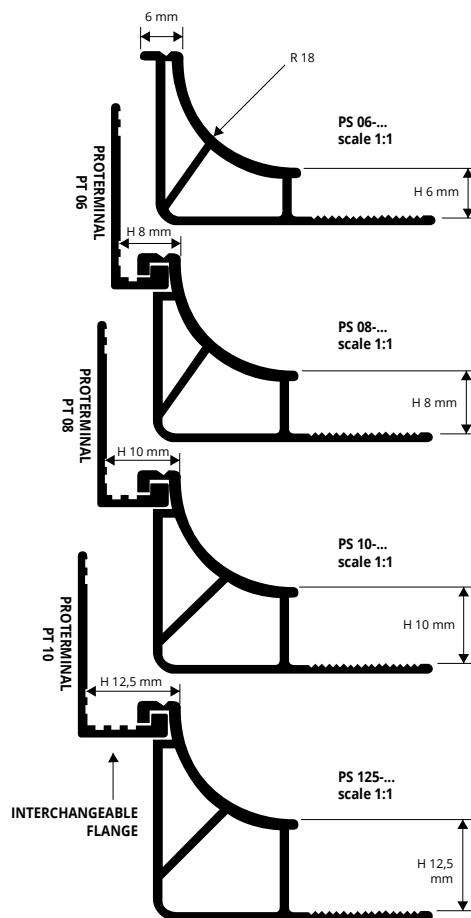

BUY WHITE PROTERMINAL TO CREATE THE DUAL HEIGHT:

Use proterminal PT 06 to reach H 8 mm

Use proterminal PT 08 to reach H 10 mm

Use proterminal PT 10 to reach H 12,5 mm

CORNERS, END CAPS and JOINTS

NON- TOXIC VINYL RESIN - 3 COLOURS

EXTERNAL / INTERNAL CORNER - RVA COLOURED

Article	H mm	€/Pack 2 Pcs	€/Pack 10 Pcs
RAI ...-.../...	06/08/10/125	5,09	24,15
RAE ...-.../...	06/08/10/125	5,09	24,15

Available in the colours: 01 - 03 - 04.

The code of the selected colour must be added to the article code. E.g.: RAI 06-... (chosen colour white) RAI 06-01.

Choose the desired packaging. Ex. RAI 06-01/10 (pack. 10 Pcs)
RAI 06-01/2 (pack. 2 Pcs)

END CAP RT / LF - RVA COLOURED

pack. 10 Pcs (5 right and 5 left) - pack. 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack 2 Pcs	€/Pack 10 Pcs
TCE 06-.../...	06/08/10/125	4,60	21,89

Available in the colours: 01 - 03 - 04.

The code of the selected colour must be added to the article code.

E.g.: TCE 08-... (chosen colour white) TCE 08-01.

Choose the desired packaging. Ex. TCE 08-01/5 (pack. 10 Pcs)
TCE 08-01/1 (pack. 2 Pcs)

JOINTS - RVA COLOURED

pack. 10 Pcs - pack. 2 Pcs

Article	H mm	€/Pack 2 Pcs	€/Pack 10 Pcs
GIN ...-.../...	06/08/10/125	4,60	21,89

Available in the colours: 01 - 03 - 04.

The code of the selected colour must be added to the article code.

E.g.: GIN 08-... (chosen colour white) GIN 08-01.

Choose the desired packaging. Ex. GIN 08-01/10 (pack. 10 Pcs)
GIN 08-01/2 (pack. 2 Pcs)



PROJOLLY - PROJOLLY QUART

INTERNAL CORNER
RAI...-.../...

EXTERNAL CORNER
RAE...-.../...



END CAP
TCE...-.../...

JOINT
GIN...-.../...




PROROUND

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A


PROROUND is a cove-shaped profile in polished and brushed stainless steel AISI 304/1.4301-V2A particularly suitable to ensure cleanliness and hygiene in every kind of environment where high resistance to mechanical and chemical stresses are required. Its particular section and the availability in two finishes and special pieces, such as internal and external corners, make **PROROUND** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

internal seal hygienic profiles

PRDAC/S 35
PRDAC/S 35A
scale 1:1

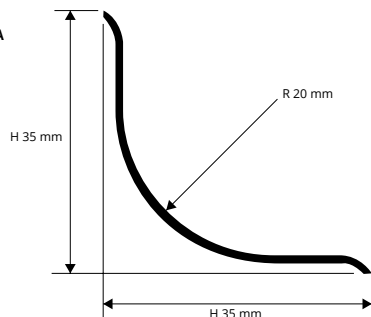

EXAMPLES OF LAYING

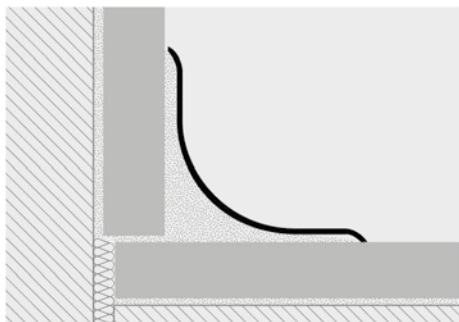

POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
35 x 35 mm - bar length 2,7 lm - pack 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRDAC 35	35	14,55	39,29
PRDAC 35A	35	18,06	48,76



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
35 x 35 mm - bar length 2,7 lm - pack 20 Pcs - 54 lm - 10/10 mm

Article	H mm	€/lm	€/Pc
PRDACS 35	35	17,65	47,66
PRDACS 35A	35	21,17	57,16

1. Choose "PROROUND" according to the desired finish and width. 2. Cut "PROROUND" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS



Suitable for use in contact with foodstuffs.

PREWELDED CORNERS and THREE-WAYS JOINTS without gaps

POLISHED AND BRUSHED STAINLESS STEEL



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A - pack 10 Pcs

Article	L mm	€/Pack
PRDI/10	100	208,17
PRDE/10	100	208,17
PRTE/10	80	312,13

Brushed STAINLESS STEEL AISI 304/1.4301-V2A - pack 10 Pcs

Article	L mm	€/Pack
PRDIS/10	100	220,97
PRDES/10	100	220,97
PRTES/10	80	337,73


PROSANI STRIP & PROSANI STRIP KIT

NON-TOXIC FLEXIBLE WHITE VINYL RESIN


PROSANI STRIP and **PROSANI STRIP KIT** are profiles in non-toxic flexible white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection between the wall tile coverings and sinks, bathtubs and shower trays. **PROSANI STRIP KIT** is provided with a double-sided butyl tape while **PROSANI STRIP** can be applied with silicone. Their particular section and ease of application, and make **PROSANI STRIP KIT** and **PROSANI STRIP** a much sought after profiles that allow a workmanlike application.

internal seal hygienic profiles


PSS 10
scale 1:1



PSS 1035
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

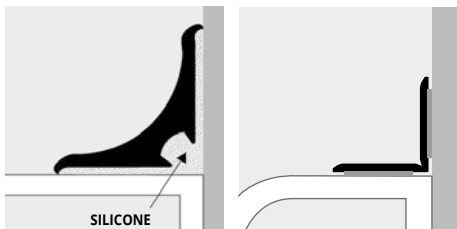

1. Choose the desired profile. 2. Cut the profile to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film (PROSANI STRIP KIT), place correctly the profile and press it without hitting / apply the equipment double-sided butyl tape on the back of the profile (PROSANI STRIP), apply the silicone along the floor-wall joint and place the profile.



FLEXIBLE WHITE VINYL RESIN

roll 25 lm

Article	LxH mm	€/lm	€/Roll
PSS 10	10 X 10	4,03	100,75

PROSANI STRIP KIT ROLL - WHITE

roll 3,5 lm

Article	LxH mm	€/lm	€/Roll
PSS 1035	11 X 11	0,89	3,12



COLOURS




PROSEAL 50 is a cove-shaped profile in shockproof non - toxic coextruded coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in two different colours and special pieces, such as internal and external corners, end caps and joints, make **PROSEAL 50** a much sought-after profile that allows a workmanlike application.

PROSEAL 50

SHOCKPROOF NON - TOXIC COEXTRUDED
COLORED VINYL RESIN



PSA 50-... / PSAA 50-...
scale 1:1

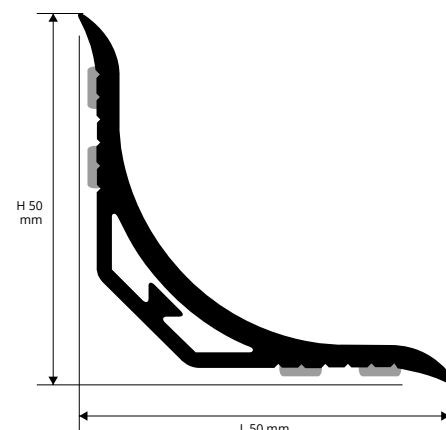

COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF

bar length 2,5 lm - Pack. 40 LM

Article	€/lm	€/Pc
PSA 50-...	8,87	23,95

Available in the colours: 01 - 03 (on demand 04).
The code of the selected colour must be added to the article code.
E.g.: PSA 50... (chosen colour white) PSA 50-01.


COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF - ADHESIVE

bar length 2,5 lm - Pack. 30 LM

Article	€/lm	€/Pc
PSAA 50-...	12,26	33,10

Available in the colours: 01 - 03 (on demand 04).
The code of the selected colour must be added to the article code.
E.g.: PSAA 50... (chosen colour white) PSAA 50-01.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

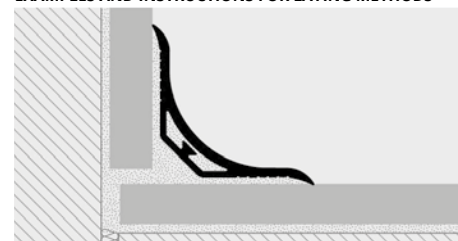

1. Choose "PROSEAL 50" according to the tile thickness and desired finish. 2. Cut "PROSEAL 50" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film (version with adhesive), place the profile and press it without hitting / apply the double-sided butyl tape on the back of the profile (version without adhesive), apply the silicone along the floor-wall joint and place the profile.

COLOURS

01 - White	03 - Cement Grey

AVAILABLE MINIMUM QUANTITY 100 PCS By colour and height
(Price and delivery time to be agreed)

04 - Light Beige

CORNERS and END CAPS

NON - TOXIC VINYL RESIN

INTERNAL / EXTERNAL CORNER AND END CAPS (for PROSEAL 50)

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TRI 50-.../...	8,96	42,31
TRE 50-.../...	8,96	42,31
TRT 50-.../...	8,96	42,31
TRC 50-.../...	8,96	42,31
TGN 50-.../...	8,96	42,31

Available in the colours: 01 - 04. TRI 50-01/10 (pack. 10 Pcs)
The code of the selected colour must be added to the article code.
E.g.: TRI 50-... (chosen colour white) TRI 50-01.



EXTERNAL CORNER



THREE WAYS



END CAP



TRE 50-.../...



TRT 50-.../...



TRC 50-.../...



TGN 50-.../...




TRI 50-.../...

PROSEAL 25


SHOCKPROOF NON - TOXIC COEXTRUDED
COLORED VINYL RESIN

PROSEAL 25 is a cove-shaped profile in shockproof non - toxic coextruded coloured vinyl resin particularly suitable to ensure cleanliness and hygiene in public and industrial environments. Its particular section and the availability in three different colours and special pieces, such as internal and external corners, end caps and joints, make **PROSEAL 25** a much sought-after profile that allows a workmanlike application.

internal seal hygienic profiles

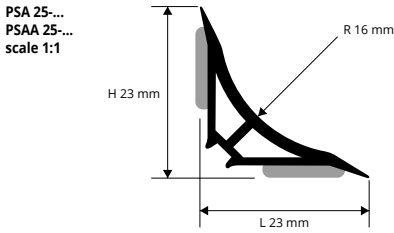

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

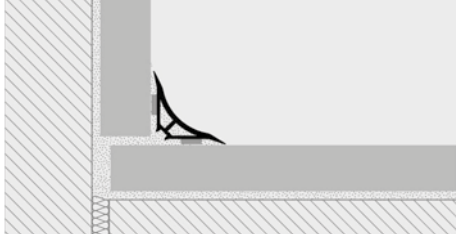

1. Choose "PROSEAL 25" according to the tile thickness and desired finish. 2. Cut "PROSEAL 25" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry, remove the protective film (version with adhesive), place the profile and press it without hitting / apply the double-sided butyl tape on the back of the profile (version without adhesive), apply the silicone along the floor-wall joint and place the profile.



COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF

bar length 2,5 lm - pack. 50 LM

Article	€/lm	€/Pc
PSA 25-...	4,09	10,22

Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: PSA 25-... (chosen colour white) PSA 25-01..

COEXTRUDED VINYL RESIN NON-TOXIC SHOCKPROOF ADHESIVE

bar length 2,5 lm - pack. 50 LM

Article	€/lm	€/Pc
PSAA 25-...	6,52	16,30

Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: PSAA 25-... (chosen colour white) PSAA 25-01..

COLOURS



PROSEAL KIT 25 (1 Pc of 1,80 LM + 2 Pcs of 0,90 lm + 2 INTERNAL CORNERS and 2 END CAPS 1 R and 1 L)

Description	Article	€/KIT
Kit PROSEAL 25	KTPSA 25-01	33,58
1 Pc PROSEAL 25 of 1,80 lm	PSA 25-01	
2 Pcs PROSEAL 25 of 0,90 lm	PSA 25-01	
2 Internal corner	TRI 25-01	
2 End caps	TRC 2501	

CORNERS, END CAPS and THREE-WAYS JOINTS

NON - TOXIC VINYL RESIN



INTERNAL CORNER
TRI ...-.../...



THREE WAYS
TRT ...-.../...



EXTERNAL CORNER
TRE ...-.../...



END CAP
TRC ...-.../...



JOINTS
TGN ...-.../...

INTERNAL / EXTERNAL CORNERS AND END CAPS (for PROSEAL 25)

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TRI 25-.../...	5,47	26,00
TRE 25-.../...	5,47	26,00
TRT 25-.../...	5,47	26,00
TRC 25-.../...	4,98	24,87
TGN 25-.../...	4,98	24,87

Available in the colours: 01 - 03 - 04.
The code of the selected colour must be added to the article code.
E.g.: TRI 25-... (chosen colour white) TRI 25-01.
Choose the desired packaging. Ex. TRI 25-01/10 (pack. 10 Pcs)
TRI 25-01/2 (pack. 2 Pcs)




PROSEAL FLEX

NON-TOXIC FLEXIBLE VINYL RESIN


PROSEAL FLEX is a flexible non-toxic vinyl resin profile suitable to realize cove-shaped connection with resilient flooring in public and industrial environments. Its particular section makes **PROSEAL FLEX** a very sought after profile that allows that allows a workmanlike application.

PSF 15
PSF 20
PSF 25



INSTRUCTIONS FOR LAYING

1. Apply a suitable adhesive for resilient flooring on the support. 2. Place "PROSEAL FLEX" over the adhesive. 3. Apply the adhesive on the profile and the support and lay the resilient flooring.

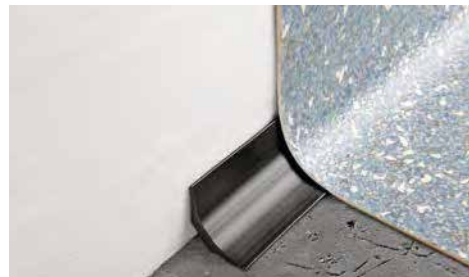

FLEXIBLE BLACK NON-TOXIC VINYL RESIN

bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L x H mm	€/lm	€/Pc
PSF 15-11	15x15	1,24	1,24
PSF 20-11	20x20	1,50	1,50
PSF 25-11	25x25	1,87	1,87

COLOURS



PROBATH is a cove-shaped profile in shockproof non - toxic coextruded white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection between the wall tile coverings and sinks, bathtubs and shower trays. Its particular section and the availability in two different height and special pieces, such as internal and external corners, (only for PSB-20) end caps and joints, make **PROBATH** a much sought-after and easy to lay profile that allows a workmanlike application.

PROBATH

SHOCKPROOF NON - TOXIC
COEXTRUDED VINYL RESIN



CO-EXTRUDED VINYL RESIN NON - TOXIC IMPACT - RESISTANT
bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	H mm	€/lm	€/Pc
PSB 15-01	15	4,36	10,90
PSB 20-01	20	5,61	14,03

AVAILABLE ONLY IN WHITE

COLOURS




01 - White

FOR OTHER COLORS MINIMUM ORDER 400 pcs




PROBATH KIT (1 PC of 1,80 LM + 2 PCS of 0,90 LM + 2 INTERNAL CORNERS and 2 END CAPS 1 R and 1 L)

Description	Article	€/KIT
Kit PROBATH	KTPSB 20-01	32,96
1 Pc PROBATH of 1,80 lm	PSB 20-01	
2 Pc PROBATH of 0,90 lm	PSB 20-01	
2 Internal Corner	TRI 25-01	
2 End caps	TRC 25-01	

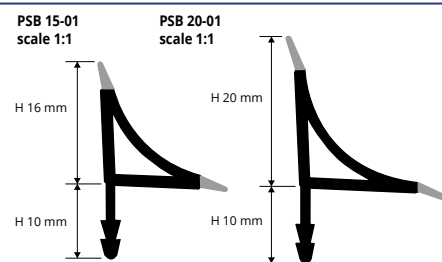

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

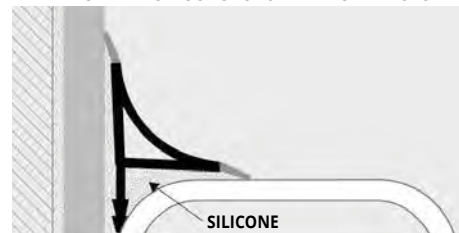

1. Choose "PROBATH" according to the desired height. 2. Cut "PROBATH" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry apply the silicone on the back of the profile and place it without hitting.

internal seal hygienic profiles

PROBATH FLEX is a cove-shaped profile in shockproof non - toxic flexible white vinyl resin particularly suitable to ensure cleanliness and hygiene along the connection between the wall tile coverings and sinks, bathtubs and shower trays. Its particular section and the availability in two different height and special pieces, such as internal and external corners, (only for PSB-20) end caps and joints, make **PROBATH FLEX** a much sought-after and easy to lay profile that allows a workmanlike application.

PROBATH FLEX

SHOCKPROOF NON - TOXIC FLEXIBLE
VINYL RESIN




FLEXIBLE WHITE VYNIL RESIN
bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	H mm	€/lm	€/Pc
PSBF 15-01	15	5,09	12,72
PSBF 20-01	20	6,34	15,85

AVAILABLE ONLY IN WHITE



01 - White

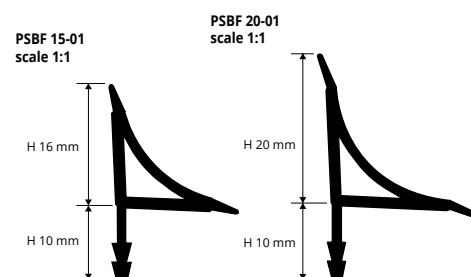

1. Choose "PROBATH FLEX" according to the desired height. 2. Cut "PROBATH FLEX" to the desired length. 3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid. 4. When the surface is perfectly dry apply the silicone on the back of the profile and place it without hitting.

internal seal hygienic profiles

CORNERS, END CAPS and THREE-WAYS JOINTS

NON-TOXIC VINYL RESIN

CORNERS INTERNAL / EXTERNAL, THREE-WAYS, JOINTS AND END CAP

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TRI 25-01/...	5,47	26,00
TRE 25-01/...	5,47	26,00
TRT 25-01/...	5,47	26,00
TRC 25-01/...	4,98	24,87
TGN 25-01/...	4,98	24,87

Choose the desired packaging. Ex. TRI 25-01/10 (pack. 10 Pcs)
TRI 25-01/2 (pack. 2 Pcs)

CORNERS INTERNAL / EXTERNAL AND END CAP - (for PSB 15 - PSBF 15)

Article	€/Pack. 2 Pcs	€/Pack. 10 Pcs
TPSB 15-01/...	4,98	24,87
RIPSB 15-01/...	5,47	26,00
REPSB 15-01/...	5,47	26,00

Choose the desired packaging. Ex. TPSB 15-01/10 (pack. 10 Pcs)
TPSB 15-01/2 (pack. 2 Pcs)



EXTERNAL CORNER
REPSB 15-01



END CAP
TPSB 15-01



INTERNAL CORNER
RIPSB 15-01



INTERNAL CORNER
TRI 25-01



EXTERNAL CORNER
TRE 25-01



END CAP
TRC 25-01



JOINTS
TGN 25-01



THREE WAYS
TRT 25-01




* = Production on demand with minimum quantity of 400 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROKERLAM LINE

POLISHED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

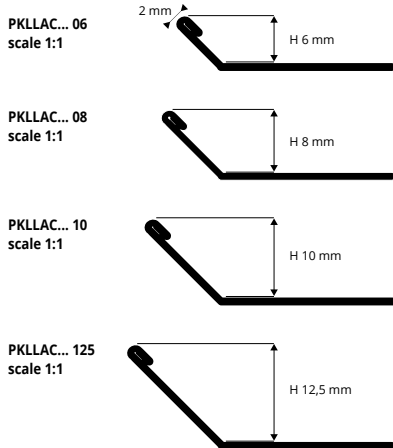

LAYING INSTRUCTIONS



PROKERLAM LINE is a profile in polished and brushed stainless steel AISI 304/1.4301-V2A suitable to protect the external corners of coverings in low thickness. It can be used like connection profile between step tread and riser of stairs coated with ceramic and mosaic with low thickness. Its particular section and the availability in three different heights and finishes and special pieces such as internal and external corners, end caps and joints make **PROKERLAM LINE** a much sought-after profile that allows a workmanlike application even with low thickness coverings.



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pc
PKLLAC 06	6	8,21	22,17
PKLLAC 08	8	8,57	23,14
PKLLAC 10	10	9,00	24,30
PKLLAC 125	12,5	9,53	25,73

1. Choose "PROKERLAM LINE" according to the desired finish.
2. Cut "PROKERLAM LINE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROKERLAM LINE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm


Article	H mm	€/lm	€/Pc
PKLLACS 06	6	10,26	27,70
PKLLACS 08	8	10,74	29,00
PKLLACS 10	10	11,23	30,32
PKLLACS 125	12,5	11,95	32,27

COLOURS



PROKERLAM LINE

ANODIZED, VARNISHED AND STONE LINE ALUMINIUM

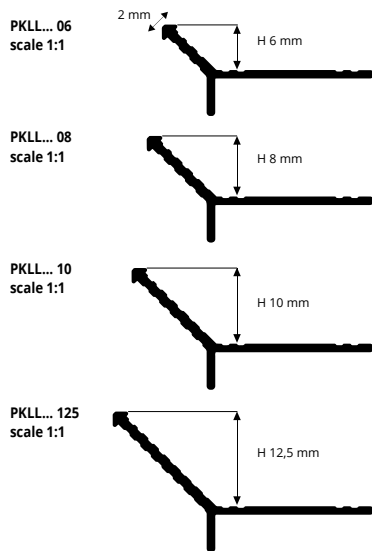

LAYING INSTRUCTIONS



1. Choose "PROKERLAM LINE" according to the desired finish.
2. Cut "PROKERLAM LINE" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the anchoring flange of "PROKERLAM LINE" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



ANODISED SILVER ALUMINIUM thermo packed
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pc
PKLLAA 06	6	5,44	14,69
PKLLAA 08	8	5,80	15,66
PKLLAA 10	10	6,16	16,63
PKLLAA 125	12,5	6,65	17,96

POLISHED CHROME ALUMINIUM thermo packed
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pc
PKLLBC 10	10	10,44	28,19
PKLLBC 125	125	11,11	30,00

COLOURS

ANODIZED	POLISHED
AA - Anodized Silver Alu.	BC - Polished chrome alu.
VARNISHED	
01 - White Varnished Alu.	11 - Black Varnished Alu.

STONE LINE				
SL02 - Stone cream	SL03 - Stone greywary	SL04 - Stone sand	SL05 - Stone grey	SL08 - Stone antrdark



VARNISHED ALUMINIUM (White-Black) thermo packed
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pc
PKLLA 06-01	6	6,57	17,74
PKLLA 06-11	6	6,57	17,74
PKLLA 08-01	8	7,01	18,93
PKLLA 08-11	8	7,01	18,93
PKLLA 10-01	10	7,46	20,14
PKLLA 10-11	10	7,46	20,14
PKLLA 125-01	12,5	7,91	21,36
PKLLA 125-11	12,5	7,91	21,36

STONE LINE ALUMINIUM thermo packed
Bar lenght 2,7 lm - Pack 40 PCS - 108 lm

Article	H mm	€/lm	€/Pc
PKLLA 06-SL...	6	8,73	23,57
PKLLA 08-SL...	8	9,31	25,14
PKLLA 10-SL...	10	9,90	26,73
PKLLA 125-SL...	12,5	10,68	28,84

The code of the selected colour must be added to the article code.
E.g.: PKLLA 06-... (chosen colour stone cream) PKLLA 06-SL02.

PROTERMSTEP ACC is a profile for stair in polished and brushed stainless steel AISI 304/1.4301-V2A. The profile protects the tread and cover the joint between the tread and the riser of the step. It can also be used overturned and for this reason it is suitable for two different tile thickness. Its particular geometry and the availability of two finishes and different heights make **PROTERMSTEP ACC** suitable for every kind of stair with ceramic, terracotta floorings, wood and natural stone coverings.

PROTERMSTEP ACC

POLISHED AND BRUSHED STAINLESS STEEL
AISI 304/1.4301-V2A



POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	h / H mm	€/lm	€/Pc
PTSPAC 0815	08 / 15	17,88	48,28
PTSPAC 10125	10 / 12,5	17,88	48,28
PTSPAC 1530	15 / 30	34,23	92,42
PTSPAC 2025	20 / 25	34,23	92,42

COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A




BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A
bar length 2,7 lm - pack. 15 Pcs - 40,5 lm

Article	h / H mm	€/lm	€/Pc
PTSPACS 0815	08 / 15	23,25	62,78
PTSPACS 10125	10 / 12,5	23,25	62,78
PTSPACS 1530	15 / 30	44,50	120,15
PTSPACS 2025	20 / 25	44,50	120,15

ON DEMAND



ACS - Brushed stainless steel AISI 304/1.4301-V2A

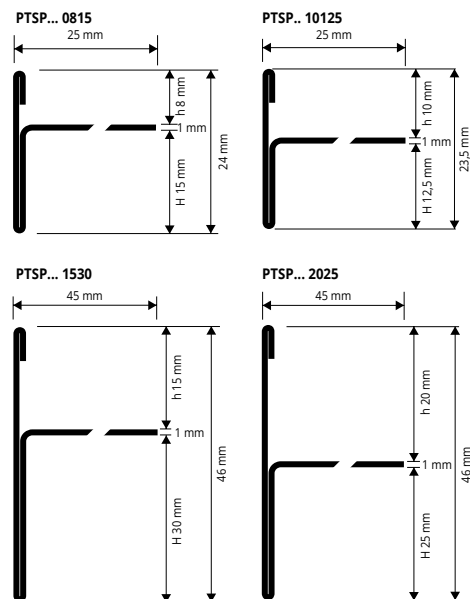

INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERMSTEP ACC" according to the tile thickness and desired finish. 2. Cut "PROTERMSTEP ACC" to the desired length. 3. Lay the raiser of the step and apply the adhesive on the support where the profile will be laid. 4. Press the anchoring flange of "PROTERMSTEP ACC" into the adhesive. 5. Lay the tiles aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 6. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

ANGLE AND JOINT

CORNER - pack. 10 Pcs

Article	h / H mm	€/Pc	€/pack
REPTSAC 0815/10	08 / 15	41,83	418,30
REPTSAC 10125/10	10 / 12,5	41,83	418,30
REPTSAC 1530/10	15 / 30	41,83	418,30
REPTSAC 2025/10	20 / 25	41,83	418,30


JOINT - pack. 10 Pcs

Article	h / H mm	€/Pc	€/pack
GIPTSAC 0815/10	08 / 15	7,65	76,50
GIPTSAC 10125/10	10 / 12,5	7,65	76,50
GIPTSAC 1530/10	15 / 30	7,65	76,50
GIPTSAC 2025/10	20 / 25	7,65	76,50

JOINT GIPTSAC ..



CORNER REPTSAC ..




* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 Pcs, 20% increase for orders of less than 10 Pcs.

PROTOP

ANODIZED AND POLISHED ALUMINIUM

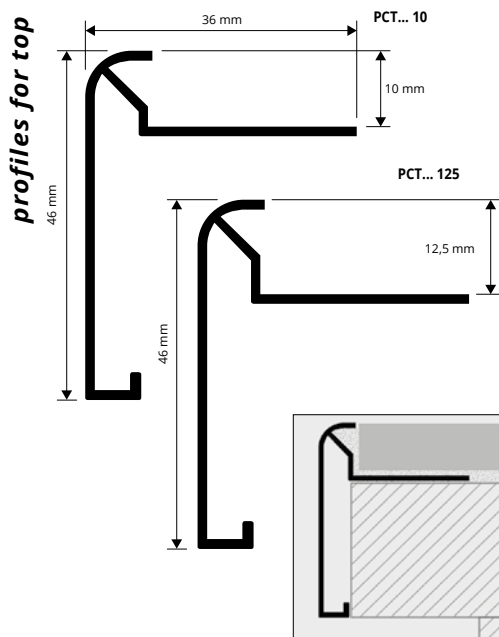

ANODIZED SILVER ALUMINIUM
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PCTAA 10	10	12,89	34,80
PCTAA 125	12,5	13,22	35,69



POLISHED TITANIUM ALUMINIUM
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PCTBT 10	10	21,51	58,08
PCTBT 125	12,5	21,84	58,97

POLISHED CHROME ALUMINIUM
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PCTBC 10	10	21,51	58,08
PCTBC 125	12,5	21,84	58,97

COLOURS

AA - Anodized silver alum.	BT - Polished titanium alum.	BC - Polished chrome alum.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTOP" according to the tile thickness and desired finish. 2. Cut "PROTOP" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTOP" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CORNERS

INTERNAL / EXTERNAL CORNERS ANODIZED SILVER ALUMINIUM
pack. 10 Pcs

Article	€/pack
EPCTAA 90/10 (90°)	189,09
IPCTAA 90/10 (90°)	189,09
EPCTAA 135/10 (135°)	189,09
IPCTAA 135/10 (135°)	189,09



EXTERNAL
CORNER
EPCT... 90

INTERNAL / EXTERNAL CORNERS POLISHED TITANIUM ALUMINIUM
pack. 10 Pcs

Article	€/pack
EPCTBT 90/10 (90°)	189,09
IPCTBT 90/10 (90°)	189,09
EPCTBT 135/10 (135°)	189,09
IPCTBT 135/10 (135°)	189,09



EXTERNAL
CORNER
EPCT... 135

INTERNAL / EXTERNAL CORNERS POLISHED CHROME ALUMINIUM
pack. 10 Pcs

Article	€/pack
EPCTBC 90/10 (90°)	223,50
IPCTBC 90/10 (90°)	223,50
EPCTBC 135/10 (135°)	223,50
IPCTBC 135/10 (135°)	223,50




INTERNAL
CORNER
IPCT... 90

INTERNAL
CORNER
IPCT... 135

PROTOP T

ANODIZED AND POLISHED ALUMINIUM

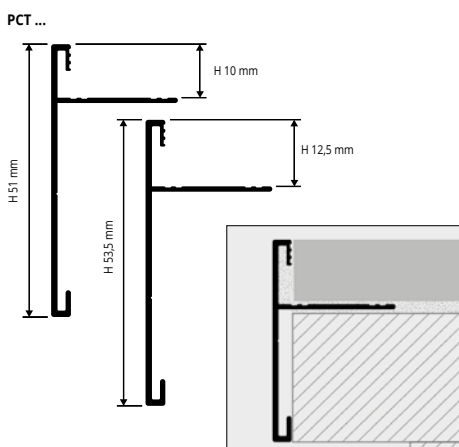

ANODIZED SILVER ALUMINIUM
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PCTAA 10T	10	12,89	34,80
PCTAA 125T	12,5	13,22	35,69



POLISHED CHROME ALUMINIUM
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	H mm	€/lm	€/Pc
PCTBC 10T	10	21,51	58,08
PCTBC 125T	12,5	21,84	58,97

INTERNAL / EXTERNAL CORNER ANODIZED SILVER ALUMINIUM
pack. 10 Pcs

Article	€/pack
IEPCTAA 12590T/10 (90°)	189,09
IEPCTAA 1090T/10 (90°)	189,09
IEPCTAA 10135T/10 (135°)	189,09
IEPCTAA 125135T/10 (135°)	189,09

INTERNAL / EXTERNAL CORNER ANODIZED CHROME ALUMINIUM
pack. 10 Pcs

Article	€/pack
IEPCTBC 12590T/10 (90°)	189,09
IEPCTBC 1090T/10 (90°)	189,09
IEPCTBC 10135T/10 (135°)	189,09
IEPCTBC 125135T/10 (135°)	189,09

COLOURS

AA - Anodized silver alum.	BC - Polished chrome alum.



IEPT... 90T



IEPT... 135T

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTOP T" according to the tile thickness and desired finish. 2. Cut "PROTOP T" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTOP T" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.



POWERED BY:
PREMIER
premier.partners