




POWERED BY:
PREMIER
premier.partners

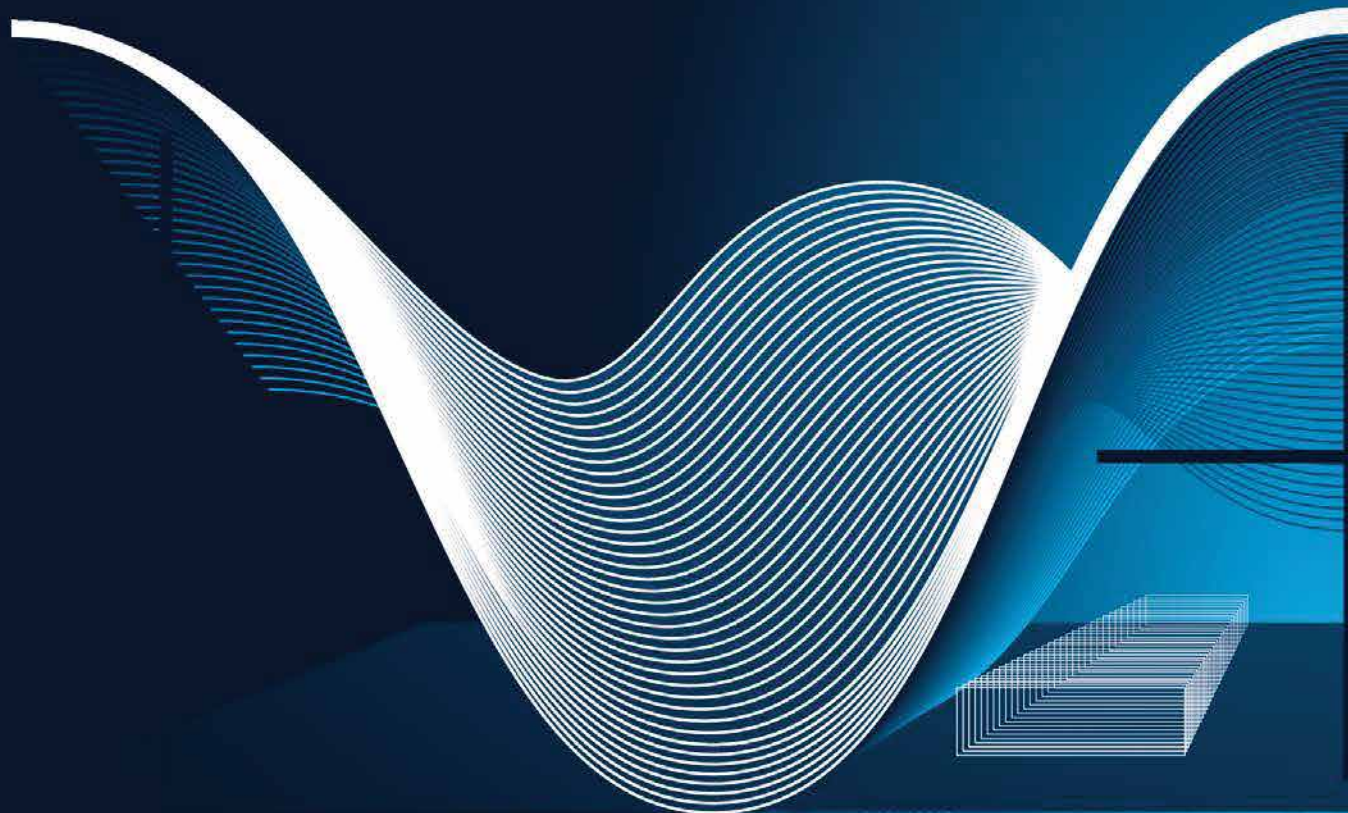

An interpretation of:
Bosjes Chapel, Steyn Studio, CAPE TOWN (South Africa), 2016

POWERED BY:
PREMIER
premier.partners



PROFILES FOR LAMINATE, PARQUET
AND CARPETED FLOORS

WOODEN/LVT

COLOURS
STANDARD AND ON DEMAND

For a precise assessment of colours request the wooden finishes sample range.
For sample finishes, contact the sales office for minimum quantities, timing and costs.

WOOD COLOURS

wooden finishes	Promutifix	SOL 40P Zero Curve Terminal Pin	Terminal	Style Stair	Style Stair L	LVT	Prowalk	SOL 30	Procover wood	Profixer line	7016	7011	Multiskirting round/square	Skirting 40
04W	*	●	*	*	●	*	*	*	*	●	●	*	*	*
05W	●	●	●	●	●	●	*	●	●	●	●	*	*	*
06W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
07W	●	●	*	●	*	*	*	*	*	●	*	●	*	*
08W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
09W	●	●	●	●	*	●	*	●	*	●	*	●	*	*
10W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
11W	*	*	*	*	*	*	*	*	●	*	*	*	*	*
13W	*	●	*	*	●	●	*	●	*	●	●	*	*	*
18W	●	●	●	●	●	●	*	●	*	●	●	●	*	*
21W	●	●	●	●	●	●	*	●	*	●	●	●	*	*
25W	*	●	*	*	●	●	*	●	*	●	●	*	●	●
28W	*	*	*	*	*	*	*	●	*	*	*	*	*	*
29W	●	●	●	●	●	●	*	●	●	●	●	●	●	●
30W	●	●	●	●	●	●	*	*	●	●	●	●	●	●
31W	●	●	●	●	●	●	*	*	*	●	●	●	*	*
32W	●	●	*	●	●	*	*	*	*	●	●	●	*	*
33W	*	●	*	*	●	●	*	*	*	●	●	*	*	*
34W	●	●	●	●	●	●	*	*	*	●	●	●	●	●
35W	●	●	*	●	●	*	*	*	*	●	●	●	*	*
36W	*	●	*	*	●	●	*	*	*	●	●	*	*	*
37W	●	●	●	●	●	●	*	*	*	●	●	●	*	*
38W	*	●	*	*	●	●	*	*	*	●	●	*	*	*
39W	*	●	*	*	●	●	*	*	*	●	●	*	*	*
40W	*	*	*	*	*	*	*	*	*	*	*	●	*	*
41W	●	●	●	●	●	●	*	*	*	●	●	●	*	*
42W	●	●	●	●	●	●	*	*	*	●	●	●	*	*
43W	*	*	*	*	*	●	*	*	*	*	*	●	*	*
44W	●	●	●	●	●	●	*	*	*	●	●	●	*	*
45W	*	●	*	*	●	●	*	*	*	●	●	*	*	*
46W	●	●	●	●	*	●	*	*	*	●	*	●	*	*
47W	*	*	*	*	*	●	*	*	*	*	*	●	*	*
48W	●	●	*	●	*	●	*	*	*	●	*	●	*	*
49W	●	●	*	●	*	●	*	*	*	●	*	●	*	*
50W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
51W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
52W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
53W	*	●	*	*	●	*	*	*	*	●	●	*	*	*
54W	*	●	*	*	●	*	*	*	*	●	●	*	*	*
55W	*	●	*	*	●	*	*	*	*	●	●	*	*	*
56W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
57W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
58W	*	*	*	*	*	*	*	*	*	*	*	*	*	*

wooden finishes	Promutifix	SOL 40P Zero Curve Terminal Pin	Terminal	Style Stair	Style Stair L	LVT	Prowalk	SOL 30	Procover wood	Profixer line	7016	7011	Multiskirting round/square	Skirting 40
59W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
60W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
61W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
62W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
63W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
64W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
65W	●	●	*	●	*	*	*	*	*	●	*	●	*	*
66W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
67W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
68W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
69W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
70W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
71W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
72W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
73W	●	●	*	●	*	*	*	*	*	●	*	●	*	*
74W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
75W	●	●	*	●	*	*	*	*	*	●	*	●	*	*
76W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
77W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
78W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
79W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
80W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
81W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
82W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
83W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
84W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
85W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
86W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
87W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
88W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
89W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
90W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
91W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
93W	●	*	*	*	*	●	*	*	*	*	*	*	*	*
94W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
95W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
97W	*	*	*	*	*	*	*	*	*	*	*	*	*	*
AA	X	X	X	X	X	X	X	X	*	*	●	●	●	●
B	X	X	X	X	X	X	X	X	X	X	●	●	●	●
N	X	X	X	X	X	X	X	X	X	X	●	*	●	●





















© 2022 All rights reserved by Progress Profiles. Printed in Italy

WOODEN/LVT






COLOURS
STANDARD AND ON DEMAND

For a precise assessment of colours request the wooden finishes sample range.
For sample finishes, contact the sales office for minimum quantities, timing and costs.

WOOD COLOURS



								
04W - Dark beech	05W - Light oak (strip)	06W - Dark oak (Walnut)	07W - Light cherry (strip)	08W - Dark cherry (board)	09W - Red walnut	10W - Wengè	11W - Decapè bleached	13W - Indonesian teak
								
18W - Light zerbano	21W - Oak powder	25W - Bleached fir	28W - Aspen oak	29W - White oak	30W - Grey oak	31W - Victoria oak	32W - Pink oak	33W - Sawed oak
								
34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak	39W - Grey elm	40W - Brown oak	41W - Ice oak	42W - Grace oak
								
43W - Manhattan oak	44W - Honey oak	45W - Marocco oak	46W - Black decapè	47W - Black oak	48W - Cork oak	49W - Sand oak	50W	51W
								
52W	53W	54W	55W	56W	57W	58W	59W	60W
								
61W	62W	63W	64W	65W - Tripoli	66W	67W	68W	69W
								
70W	71W	72W	73W - Bangkok	74W	75W - Liotard	76W	77W	78W
								
79W	80W	80W	82W	83W	84W	85W	86W	87W
								
88W	89W	90W	93W - New white	94W	95W	97W		

EXTRUDED EXPANDED PVC COLOURS

			
B - White	GC - Light grey	GS - Dark grey	N - Black
			
04W - Dark beech	05W - Light Oak	06W - Dark Oak	07W - Light cherry
			
08W - Dark cherry	09W - Red Walnut	10W - Wengè	M - Mahogany

Extruded Expanded PVC	Proseal wood	Proangle wood	Skirting	Angle bar
B (White)	●	●	●	●
GC (Light Grey)	●	●	●	●
GS (Dark Grey)	●	●	●	●
N (Black)	●	●	●	●
04W (Dark Beech)	X	X	●	●
05W (Light Oak)	●	●	●	●
06W (Dark Oak)	X	X	●	●
07W (Light cherry)	X	X	●	●
08W (Dark cherry)	X	X	●	●
09W (Red Walnut)	X	X	●	●
10W (Wengè)	●	●	●	●
M (Mahogany)	X	X	●	●

ANODIZED COLOURS

			
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium
			
CH - Anod. champagne alum.	SB - Anod. sand aluminium		

Anodized Aluminium Colours	Promultifix	SOL 40P Zero Curve Terminal Pin	Terminal	Style Stair	Style Stair L	LVT	Prowalk	Prostep ins	SOL 30	Profixer line	Proscrow
AO (anod. gold)	●	●	●	●	●	●	●	●	●	●	●
AA (anod. silver)	●	●	●	●	●	●	●	X	*	●	*
AB (anod. bronze)	●	●	●	●	●	●	●	X	*	●	*
AT (anod. titanium)	*	*	*	*	*	*	*	X	*	*	*
CH (anod. champagne)	*	*	*	*	*	*	*	X	*	*	*
SB (anod. sand)	*	*	*	*	*	*	*	X	*	*	*

● = Available finishes	X = Not available finishes
* = minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.	

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

PROMULTIFIX SYSTEM®

INSTRUCTIONS FOR LAYING

PATENTED

PROGRESS PROFILES® has filed an innovative patent PROMULTIFIX SYSTEM® in respect of a wide range of aluminum profiles covered with very strong films in wooden finishes, plus anodized finishes.

The PROMULTIFIX SYSTEM® system is a multipurpose profile for finishing laminate, melamine-coated, parquet and wood floating floors.

FIXING: it can be fixed with adhesive, nylon anchors, glue, flatten down base and screws.

STANDARD Wooden FINISHES: Light oak (strip), Light cherry (strip), Red walnut (merbau-apple-walnut), Light zerbano, Oak powder, White oak, Grey oak, Victoria oak, Pink oak, Havana oak, Edinburgh oak, Carvi oak, Ice oak, Grace oak, Honey oak, Black decapè, Cork oak, Sand oak, Tripoli, Bangkok, Liotard, New white.

STANDARD ALUMINUM FINISHES: anodized Silver, Gold and Bronze.

ANODIZED COLOURS




* ANODIZED COLOURS ON DEMAND




WOODEN COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

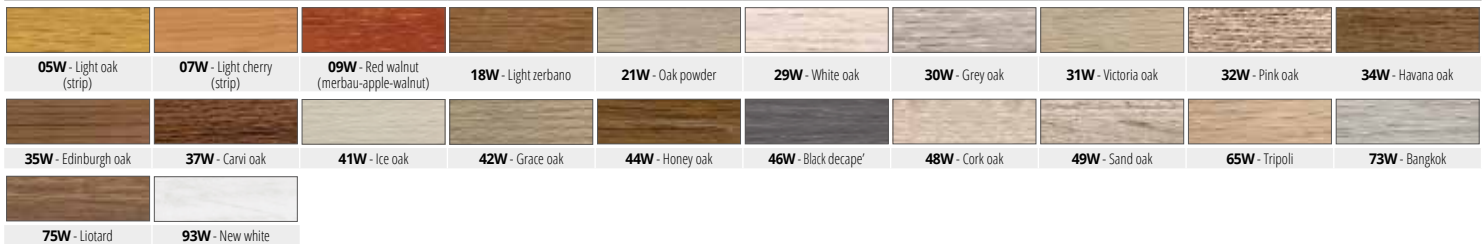

* WOODEN COLOURS ON DEMAND

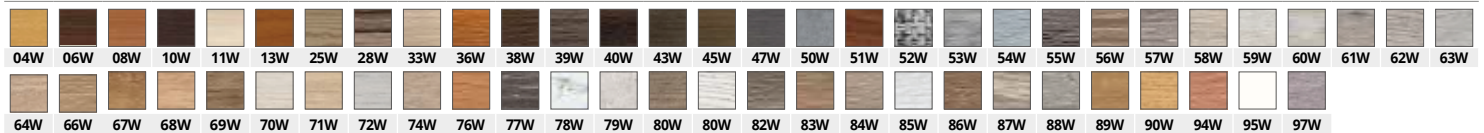

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.
For sample finishes, contact the sales office for minimum quantities, timing and costs.

PROMULTIFIX SYSTEM

PROMULTIFIX SYSTEM is composed of an aluminium profile with adhesive, with a lengthwise groove in form of dovetail, where nylon anchors can be inserted, or a punched aluminium flatten down base for an easy and invisible fixing.

NYLON SCREW ANCHORS



PERIMETRIC SUPPORTS



FLATTEN DOWN BASE



* = Article on demand minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.

It is a system composed of a special TOP with adhesive, with a visible surface of 44.7 mm, anodized aluminium or covered with wooden film. The aluminium TOP can be fixed to the floor in different ways: with adhesive, with nylon anchors, support with removable spacers, flatten down base.

PROMULTIFIX SYSTEM

ALUMINIUM PROFILES
FIXING KIT



TOP IN ANOD. ALUMINIUM with adhesive (6 finishes of which 3 on demand) n.3 KIT (15 screws, 12 perimeter pins, 6 joints) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PMPFX... 42A	44,7	8,39	22,65

TOP IN ANOD. ALUMINIUM with adhesive (6 finishes of which 3 on demand) + n.1 KIT (5 screws, 4 perimeter pins, 2 joints) thermo packed - bar length 0,90 lm - 15 Pcs

Article	L mm	€/Pc
PMPFX... 42090AS	44,7	8,81

TOP IN ALUM. COVERED with adhesive (80 wooden finishes of which 59 on demand) + n.3 KIT (15 screws, 12 perimeter pins, 6 joints) thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PMPFX... 42A	44,7	12,01	32,43

TOP IN ALUM. COVERED with adhesive (80 wooden finishes of which 59 on demand) + n.1 KIT (5 screws, 4 perimeter pins, 2 joints) thermo packed - bar length 0,90 lm - 15 Pcs


Article	L mm	€/Pc
PMPFX... 42090AS	44,7	12,62

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 05W - 07W - 09W - 18W - 21W - 29W - 30W - 31W - 32W - 34W - 35W - 37W - 41W - 42W - 44W - 46W - 48W - 49W - 65W - 73W - 75W - 93W. The code of the selected colour must be added to the article code. E.g.: PMPFX... 42A (chosen finish anod. gold) PMPFXAO 42A.


EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the profile of the required finish, if necessary cut the TOP in the required length.
2. Clean, remove the grease and dry the substrate: the temperature should be at least of 15° C.
- Fixing with biadhesive tape:**
3. Remove the paper protection from the adhesive and lay the TOP with a vertical pressure without moving the profile.
- Fixing with screw anchors:**
3. Drill the substrate with a 6 mm bit, 5 holes per linear meter. 4. Remove the paper protection from the adhesive. 5. Insert the screw anchors in the profile dovetail groove. 6. Beat with a rubber/pvc hammer to insert the screw anchors into the holes.
- Fixing of the aluminium flatten down base:**
3. Cut the flatten down base to the requested length. 4. Remove the paper protection from the adhesive. 5. Insert the base into the profile groove dovetail, then fix or glue the base to the floor. 6. Make a uniform pressure on the profile with the hands or a rubber hammer.
- Perimetric laying:**
3. Remove the paper protection from the adhesive. 4. Cut the perimetric pins according to the thickness of the floor. 5. Insert the perimetric pins into the profile groove dovetail using 4 supports per linear meter. 6. Fix the profil making a uniform pressure on the profile with the hands, but do not move the profile.


One fixing kit is composed of: 5 screws, 4 perimetric pins, 2 joints





PMPFX... 42090AS / 42A
scale 1:1

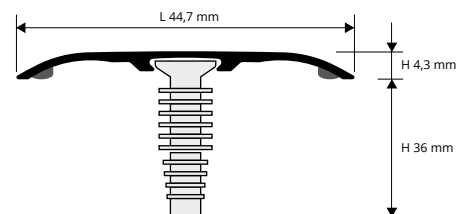

PMPFX... 42090AS / 42A
scale 1:1




PMPFX... 42090AS / 42A + PMFIXBSAN 23
scale 1:1

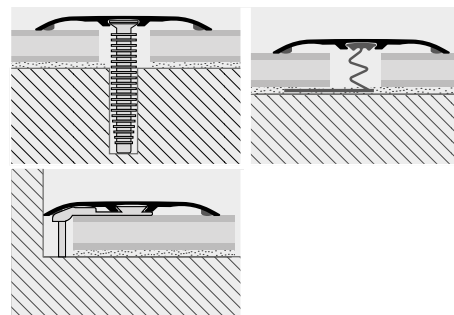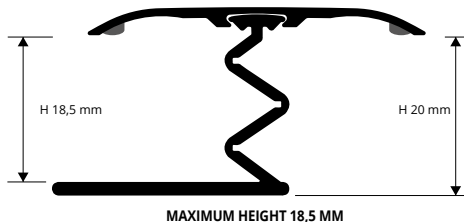

SCREWS AND SCREW ANCHORS, TAP-DOWN BASE


NICKEL - PLATED FLATHEAD SCREWS + SCREW ANCHORS
pack. 1.000 Pcs

Article	Ø mm	L mm	€/Pack.
VINIPT 325	3	25	73,96



PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORED
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMFIXBSAN 23	23	6,42	17,33

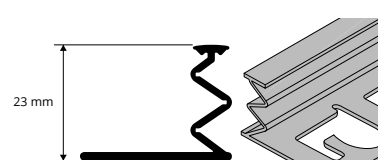



PROGRESS® PROFILES has filed an innovative patent PROINSERT SYSTEM in respect of a wide range of aluminum profiles covered with very strong films in 77 wooden finishes are available, plus 6 anodized finishes.

The **PROINSERT SYSTEM** comprises a complete set of profiles for finishing laminate, melamine-coated, parquet and wood floating floors.

INTERCHANGEABLE INSERTS in 7 heights: (H 07, 09, 11, 13, 15, 17 and 19 mm). **PROFILES COVERED** with film: resistant to wear and UV rays (classe AC1). **TWO VERSATILE VERSIONS OF BASES:** available for fixing with glue or screws.


INSTRUCTIONS FOR LAYING:




1) Choose between the two types of aluminum base.



2) Fix and/or glue the base to the floor.

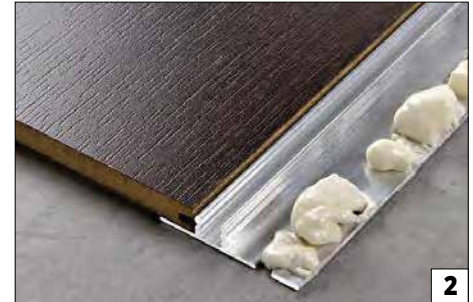

3) Lay the floor correctly leaving between 3 and 10 mm gap for the natural expansion of the wood.

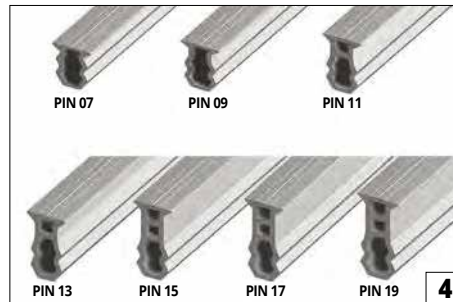


4) Choose the vinyl resin insert according to the clear height and thickness of the floor.



5) Keep the profile with the groove for insertion facing upwards and slot in the insert from the top downwards (if it does not slide easily, lubricate with water, silicone spray or vegetable oil).



6) Place the profile over the "U" shaped channel.

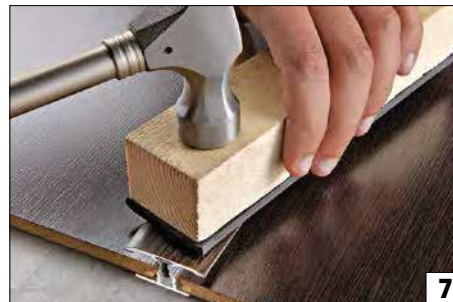

7) With the help of a wooden tapping block, apply pressure evenly over the whole length of the profile using a hammer. If tapping is done correctly, a "click" will be heard when the profile slots into place.

THESE PROFILES ARE APPLIED TO CREATE:

- Threshold covers and expansion joints (SOL 30, SOL 40P and SOL 50)
- Transition joints for differences in level and floors in differing materials and thickness (ZERO CURVE)
- Perimeter joints or terminal expansion pieces (TERMINAL PIN)
- Corner joints and step nosings (serie STYLE STAIR)

SOL 30, SOL 40P AND SOL 50



ZERO CURVE



TERMINAL PIN



STYLE STAIR / STYLE STAIR L



PROFIXER LINE SYSTEM

The **PROFIXER LINE SYSTEM** comprises an assortment of profiles in aluminum with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminum profile may be inserted for easy and invisible fixing.

NYLON SCREW ANCHORS



TAP-DOWN BASE



SOL 40P range comprises a large assortment of universal jointing profiles in aluminium covered with film that is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Thanks to the insert in rigid PVC (non-conducting) between the base and the top, the new **SOL 40P** stops and eliminates electrostatic charges and magnetic fields and whatever else may be transmitted between two floors (e.g.: heated floors). available in wooden finishes, plus anodized finishes. Any insert of height H 7, 9, 11, 13, 15, 17 and 19 mm may be used with either the punched/perforated base for screwing or for gluing. Covering width 40 mm.

SOL 40P

TOP IN WOODEN OR ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE



ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 17, 19 - 40,5 lm)

Article	H mm	€/lm	€/Pc
PISPC... 407 (PIN 07)	7 / 10	14,42	38,93
PISPC... 409 (PIN 09)	9 / 12	14,55	39,29
PISPC... 4011 (PIN 11)	11 / 14	14,68	39,64
PISPC... 4013 (PIN 13)	13 / 16	14,82	40,01
PISPC... 4015 (PIN 15)	15 / 18	14,96	40,39
PISPC... 4017 (PIN 17)	17 / 20	15,20	41,04
PISPC... 4019 (PIN 19)	19 / 22	15,39	41,55

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
length 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)


Article	H mm	€/Pc
PISPC... 4079S (PIN 07)	7 / 10	14,74
PISPC... 4099S (PIN 09)	9 / 12	14,95
PISPC... 40119S (PIN 11)	11 / 14	15,19
PISPC... 40139S (PIN 13)	13 / 16	15,46
PISPC... 40159S (PIN 15)	15 / 18	15,72
PISPC... 40179S (PIN 17)	17 / 20	16,13
PISPC... 40199S (PIN 19)	19 / 22	16,54

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 56W - 57W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PISPC... 4079S (chosen finish anod. gold) PISPCAO 4079S.

ANODIZED COLOURS




* ANODIZED COLOURS ON DEMAND



WOODEN COLOURS



* WOODEN COLOURS ON DEMAND

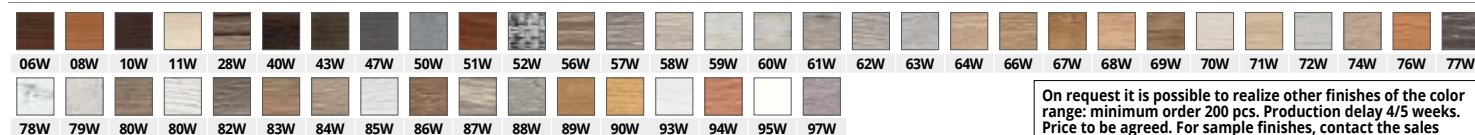

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix and/or glue the base to the floor. 2. Lay the floor leaving from 3 to 10 mm between the floor and the insert. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.





* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **ZERO CURVE** range comprises a large assortment of terminal transition profiles for joining floors at different levels and with different thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

transition profiles

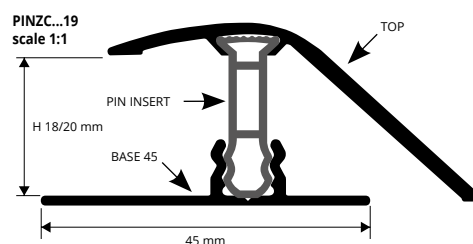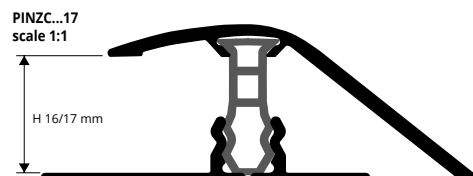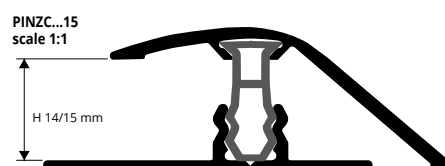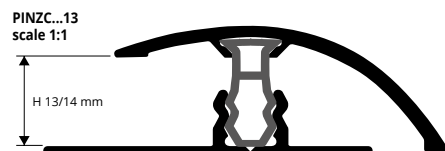

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm	€/l/m	€/Pc
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9	13,93	37,61
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12	14,60	39,42
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14	14,80	39,96
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15	15,00	40,50
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17	15,40	41,58
PINZC... 19 (top PINZ... 15 + PIN 19)	18 / 20	15,91	42,96

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
L. 0.90 Im - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)



Article	H mm	€/Pc
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9	13,64
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12	14,57
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14	14,79
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15	15,00
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17	15,38
PINZC... 19S (top PINZ... 15 + PIN 19)	18 / 20	15,77

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PINZC... 07S (chosen finish anod. gold) PINZCAO 07S.

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(80 wooden finishes of which 49 on demand) thermo packed
 bar length 2,7 lm - pack. 20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm	€/lm	€/Pc
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9	20,14	54,38
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12	20,70	55,89
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14	20,95	56,57
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15	21,23	57,32
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17	21,49	58,02
PINZC... 19 (top PINZ... 15 + PIN 19)	18 / 20	21,97	59,32

COMPLETE

ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(80 wooden finishes of which 49 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)




Article	H mm	€/Pc
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9	19,83
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12	20,67
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14	20,95
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15	21,20
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17	21,48
PINZC... 19S (top PINZ... 15+ PIN 19)	18 / 20	21,84

ANODIZED COLOURS




*** ANODIZED COLOURS ON DEMAND**



WOODEN COLOURS




*** WOODEN COLOURS ON DEMAND**

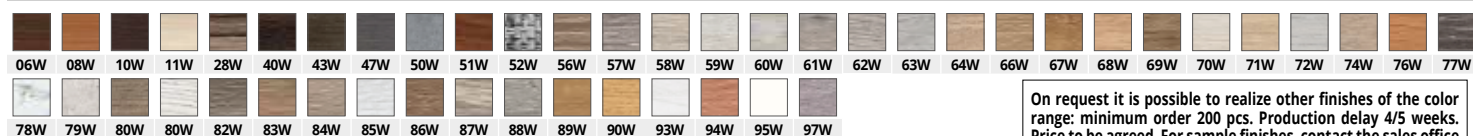

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

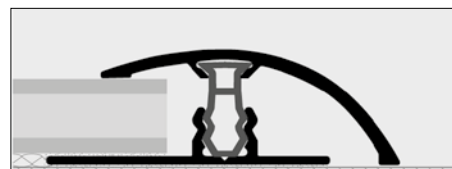

1. Fix and/or glue the base to the floor. 2. Lay the floor leaving from 3 to 10 mm between the floor and the insert. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.




TERMINAL PIN

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **TERMINAL PIN** series consists in a wide range of terminal/ outer joint squares ideal to realize the connection and junction with floors in laminate or melamine and/or wood/parquet rolled floor. The **TERMINAL PIN** allows the floor underneath to expand for more than 5 / 10 mm. It prevents from the use of the skirting -board and covers perfectly any kind of floor with a minimum thickness of 7 mm and a maximum of 22 mm. It delimitates the floor in proximity of walls, coverings, windows, doors, sliding doors, doormats buss etc.

terminal - outer profiles

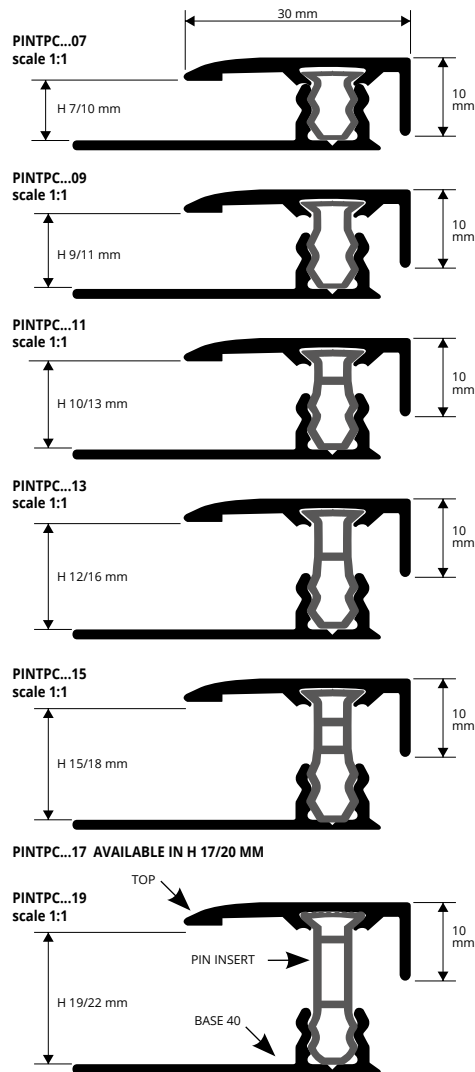

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (PIN 11, 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm	€/lm	€/Pc
PINTPC... 07 (PIN 07)	7 / 10	12,82	34,61
PINTPC... 09 (PIN 09)	9 / 11	13,21	35,67
PINTPC... 11 (PIN 11)	10 / 13	13,62	36,77
PINTPC... 13 (PIN 13)	12 / 16	14,11	38,10
PINTPC... 15 (PIN 15)	15 / 18	14,79	39,93
PINTPC... 17 (PIN 17)	17 / 20	15,61	42,15
PINTPC... 19 (PIN 19)	19 / 22	16,42	44,33

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)




Article	H mm	€/Pc
PINTPC... 07S (PIN 07)	7 / 10	13,85
PINTPC... 09S (PIN 09)	9 / 11	14,33
PINTPC... 11S (PIN 11)	10 / 13	14,83
PINTPC... 13S (PIN 13)	12 / 16	15,30
PINTPC... 15S (PIN 15)	15 / 18	15,77
PINTPC... 17S (PIN 17)	17 / 20	17,65
PINTPC... 19S (PIN 19)	19 / 22	17,22

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PINTPC... 07S (chosen finish anod. gold) PINTPCAO 07S.

ANODIZED COLOURS




*ANODIZED COLOURS ON DEMAND



WOODEN COLOURS



* WOODEN COLOURS ON DEMAND

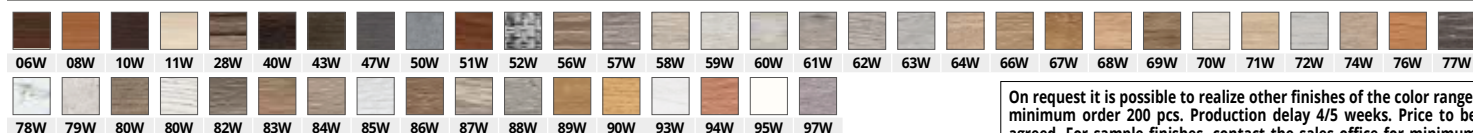

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix PINBFTL 40 base at the outer edge/wall.
2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on each side to accommodate the natural expansion between the floor and the base.
3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base.
4. With the aid of a board, hammer the TOP to the desired fitting level.

* = Article on demand minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

The **TERMINAL** range comprises a large assortment of perimeter joint or edging profiles in aluminium covered in wooden finishes are available, plus anodized finishes. They are used in various laying situations. Ideal as an edging profile for wood parquet, laminate and melamine-coated floors. They finish the floor where it joins to abutting surfaces, windows, glazed areas, doors, terraces and may also be used for joining two floors: wood/tiles, wood/carpeting.

TERMINAL

ALUMINIUM COVERED WOODEN FINISHES AND ANODIZED FINISHES



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm
(H 11 - H 13 - H 15 mm - 80 lm)

Article	H mm	€/lm	€/Pc
PINT... 07	7	6,27	16,93
PINT... 09	9	6,42	17,33
PINT... 11	11	6,55	17,69
PINT... 13	13	6,79	18,33
PINT... 15	15	7,07	19,09

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W-08W-10W-29W-30W-31W-34W-37W-41W-42W.
The code of the selected colour must be added to the article code. E.g.: PINT... 07 (chosen finish anod. gold) PINTAO 07.

ANODIZED ALUM. (6 anod. alum. finishes of which 3 on demand)
thermo packed

bar length 0,90 lm - 20 Pcs - BLISTER PACKS



Article	H mm	€/Pc
PINT... 07S	7 / 8	7,04
PINT... 09S	9 / 10	7,17
PINT... 11S	11 / 12	7,31
PINT... 15S	15 / 16	7,88

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 05W-08W-10W-29W-30W-31W-34W-37W-41W-42W.
The code of the selected colour must be added to the article code. E.g.: PINT... 07S (chosen finish anod. gold) PINTAO 07S.



ALUMINIUM COVERED (80 wooden finishes of which 70 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm
(H 11 - H 15 mm - 80 lm)

Article	H mm	€/lm	€/Pc
PINT... 09	9	10,07	27,19
PINT... 11	11	10,35	27,95
PINT... 15	15	11,99	32,37


ALUMINIUM COVERED (80 wooden finishes of which 70 on demand)
thermo packed

bar length 0,90 lm - 20 Pcs - BLISTER PACKS



Article	H mm	€/Pc
PINT... 09S	9 / 10	12,89
PINT... 11S	11 / 12	12,96
PINT... 15S	15 / 16	13,50

PINT... 07
scale 1:1




PINT... 09
scale 1:1




PINT... 11
scale 1:1



PINT... 13
scale 1:1

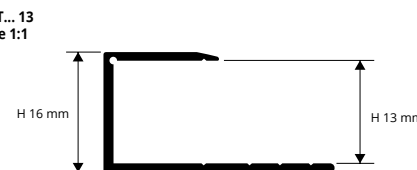

PINT... 15
scale 1:1

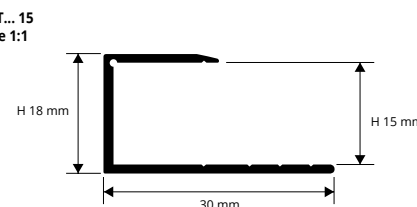

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS




1. Choose the **TERMINAL** according to the required height and finish and fix with screws and screw anchors or with glue/silicone; the profile must be placed next to the abutting surface e.g. wall, glazing, etc. 2. Align the laminate/melamine/wood floor, ensuring that a large enough gap is left to accommodate the natural expansion between the floor and the profile (approx. 3/10mm on one side).

ANODIZED COLOURS



* ANODIZED COLOURS ON DEMAND



WOODEN COLOURS



* WOODEN COLOURS ON DEMAND



On request it is possible to realize other finishes of the color range: minimum order 100 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.


* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

STYLE STAIR

TOP IN WOODEN FINISHES
and ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **STYLE STAIR** range comprises a large assortment of aluminium step nosing profiles for the edges of steps in wood, parquet, laminate or melamine with thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. Select the most suitable profile for the thickness of the floor. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

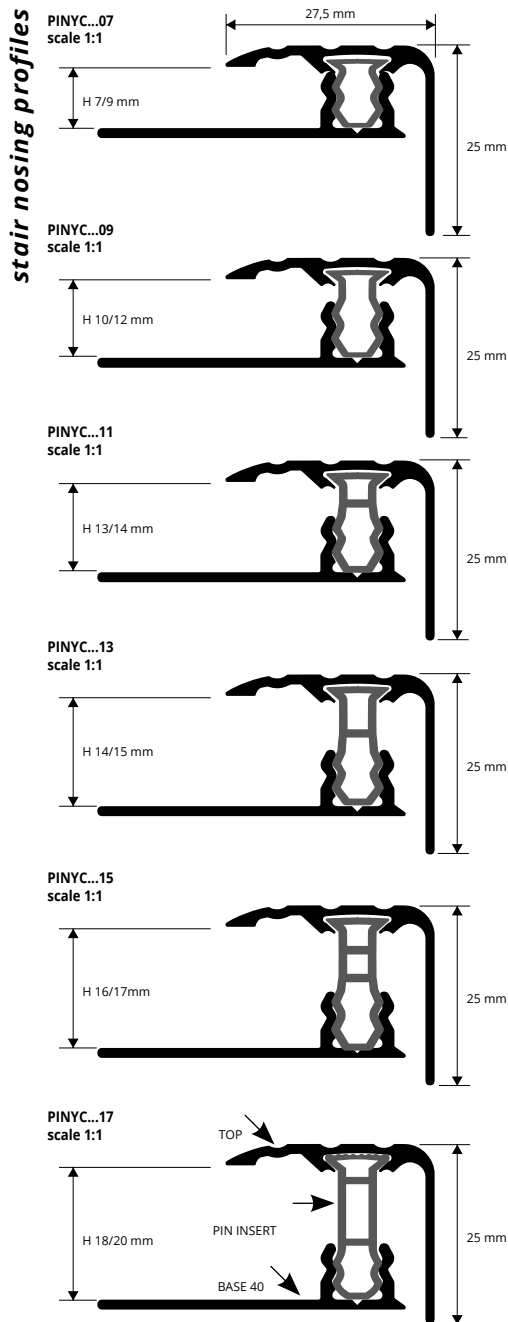

ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm	€/lm	€/Pc
PINYC... 07 (PIN 07)	7 / 9	13,19	35,61
PINYC... 09 (PIN 09)	10 / 12	13,56	36,61
PINYC... 11 (PIN 11)	13 / 14	13,93	37,61
PINYC... 13 (PIN 13)	14 / 15	14,31	38,64
PINYC... 15 (PIN 15)	16 / 17	14,67	39,61
PINYC... 17 (PIN 17)	18 / 20	15,05	40,64

COMPLETE

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 05W - 07W - 09W - 18W - 21W - 29W - 30W - 31W - 32W - 34W - 35W - 37W - 41W - 42W - 44W - 46W - 48W - 49W - 65W - 73W - 75W. The code of the selected colour must be added to the article code. E.g.: PINYC... 07 (chosen finish anod. gold) PINYCAO 07.




ALUM. TOP COVERED + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(80 wooden finishes of which 60 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)

Article	H mm	€/lm	€/Pc
PINYC... 07 (PIN 07)	7 / 9	19,07	51,49
PINYC... 09 (PIN 09)	10 / 12	19,40	52,38
PINYC... 11 (PIN 11)	13 / 14	19,78	53,41
PINYC... 13 (PIN 13)	14 / 15	20,15	54,41
PINYC... 15 (PIN 15)	16 / 17	20,53	55,43
PINYC... 17 (PIN 17)	18 / 20	20,88	56,38

COMPLETE

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



TOP IN ANODIZED FINISHES



TOP IN WOODEN FINISHES

1. Fix the base exactly over the stair riser. 2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.

ANODIZED COLOURS

AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium
---------------------------	-----------------------------	-----------------------------

* ANODIZED COLOURS ON DEMAND

AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium
-------------------------------	----------------------------	---------------------------

WOODEN COLOURS

05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut	18W - Light zerbano	21W - Oak powder	29W - White oak	30W - Grey oak	31W - Victoria oak	32W - Pink oak	34W - Havana oak	35W - Edinburgh oak
37W - Canvi oak	41W - Ice oak	42W - Grace oak	44W - Honey oak	46W - Black decap	48W - Cork oak	49W - Sand oak	65W - Tripoli	73W - Bangkok	75W - Liotard	

* WOODEN COLOURS ON DEMAND

04W	06W	08W	10W	11W	13W	25W	28W	33W	36W	38W	39W	40W	43W	45W	47W	50W	51W	52W	53W	54W	55W	56W	57W	58W	59W	60W	61W	62W	63W
64W	66W	67W	68W	69W	70W	71W	72W	74W	76W	77W	78W	79W	80W	82W	83W	84W	85W	86W	87W	88W	89W	90W	93W	94W	95W	97W			

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

* = Article on demand minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.

STYLE STAIR L comprises a large range of aluminium stair nosing protecting profiles for step in timber, parquet, laminate or melamine material with thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. The profiles is made with 3 pcs. A natural aluminium base to screw or glue to the pavement, a PIN in non-toxic rigid to insert in the TOP, then a TOP should be selected most suitable for the floor.

STYLE STAIR L

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE



ALUM. TOP + PIN INSERT + ALUM. BASE 40 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 14 - H 16 - H 18 mm - 40,5 lm)



Article	H mm	€/lm	€/Pc
PINYLC... 07 (PIN 07)	7 / 9	13,56	36,61
PINYLC... 09 (PIN 09)	10 / 12	13,93	37,61
PINYLC... 11 (PIN 11)	13 / 14	14,31	38,64
PINYLC... 13 (PIN 13)	14 / 15	14,67	39,61
PINYLC... 15 (PIN 15)	16 / 17	15,05	40,64
PINYLC... 17 (PIN 17)	18 / 20	15,42	41,63

COMPLETE

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 58W - 54W - 55W.

The code of the selected colour must be added to the article code. E.g.: PINYLC... 07 (chosen finish anod. gold) PINYLCAO 07.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



TOP IN ANODIZED FINISHES


TOP IN WOODEN FINISHES

1. Fix the base exactly over the stair riser. 2. Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on one side to accommodate the natural expansion between the floor and the base. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.

ANODIZED COLOURS




* ANODIZED COLOURS ON DEMAND



WOODEN COLOURS



* WOODEN COLOURS ON DEMAND

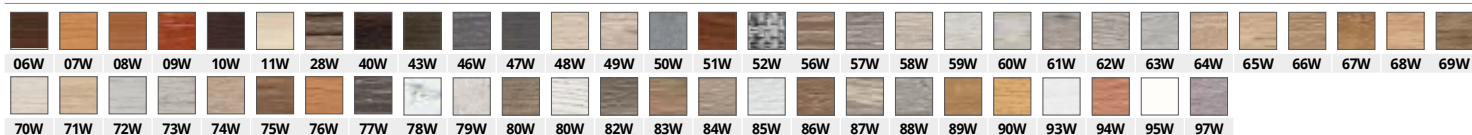

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.



UNIVERSAL, CONNECTION AND PERIMETER JOINTS



SOL 30P (Page 244)



ZERO CURVE (Page 244)



TERMINAL PIN (Page 244)

CONNECTION JOINTS



**PROINTER KL
ACC / ALL** (Page 30-32)



**PROSHELL D
ALL** (Page 159)



**PROSHELL R
ALL** (Page 159)



PROLEVALL 305
(Page 80)



PROLINOLEUM
(Page 85)



PROFLOOR 24
(Page 85)



**PROSLIDER KL
ALL** (Page 86)



**PROCOVER
1045 ALL** (Page 86)

STAIR NOSINGS PROFILES



PROSTYLE KL 10 (Page 161)




PROSTAIR KL 20 (Page 161)

LVT PROFILES - SOL 30P

AWOODEN FINISHES and ANODIZED FINISHES

universal joints

PISPC... 3046
PISPCAA 4046
scale 1:1



EXAMPLES OF LAYING



INSTRUCTIONS FOR LAYING METHODS

1. Choose SOL P / ZERO CURVE / TERMINAL PIN according to the desired finish. 2. Cut the BASE in vinyl resin/PVC to the desired length and fix it with adhesive or dowels to the support. 3. Lay the floor in vinyl, leaving a 5 mm joint between the vertical walls of the base in vinyl resin/PVC and the floor. 4. Cut the desired TOP in aluminium to the desired length. 5. Place a small wooden board on the TOP in aluminium and hammer equally in order to facilitate the insertion of the TOP into the pvc base.



ALUMINIUM TOP 6 anod. finishes (3 on demand) + **BASE** (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PISPC... 3046	30	7,40	19,98

The code of the selected colour must be added to the article code. E.g.: PISPC... 3046 (chosen finish anod. gold) PISPCAO 3046.

ALUMINIUM TOP 80 wooden finishes (56 on demand) + **BASE** (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PISPC... 3046	30	10,80	29,16

The code of the selected colour must be added to the article code. E.g.: PISPC... 3046 (chosen finish anod. gold) PISPCAO 3046.

ALUMINIUM TOP (anod. silver) + **BASE** (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	L mm	€/lm	€/Pc
PISPCAA 4046	40	7,73	20,87

LVT PROFILES - ZERO CURVE

WOODEN FINISHES and ANODIZED FINISHES

transition profiles

PINZC... 2646
PINZCAA 3246
scale 1:1



EXAMPLES OF LAYING



ALUMINIUM TOP (anod. silver) + **BASE** (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINZCAA 3246	32	7,73	20,87

ALUMINIUM TOP 6 anod. finishes (3 on demand) + **BASE** (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINZC... 2646	26	7,40	19,98

The code of the selected colour must be added to the article code. E.g.: PINZC... 2646 (chosen finish anod. gold) PINZCAO 2646.

ALUMINIUM TOP 80 wooden finishes (56 on demand) + **BASE** (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINZC... 2646	26	10,80	29,16


The code of the selected colour must be added to the article code. E.g.: PINZC... 2646 (chosen finish anod. gold) PINZCAO 2646.

LVT PROFILES - TERMINAL PIN


WOODEN FINISHES and ANODIZED FINISHES

terminal

PINTPC... 1946
PINTPCAA 2546
scale 1:1



EXAMPLES OF LAYING



ALUMINIUM TOP (anod. silver) + **BASE** (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINTPCAA 2546	25	7,73	20,87

ALUMINIUM TOP 6 anod. finishes (3 on demand) + **BASE** (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINTPC... 1946	19	7,40	19,98

The code of the selected colour must be added to the article code. E.g.: PINTPC... 1946 (chosen finish anod. gold) PINTPCAO 1946.

ALUMINIUM TOP 80 wooden finishes (56 on demand) + **BASE** (vinyl resin/PVC) -thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINTPC... 1946	19	10,80	29,16

The code of the selected colour must be added to the article code. E.g.: PINTPC... 1946 (chosen finish anod. gold) PINTPCAO 1946.

COLOURS

(For a precise assessment of colours request the wooden finishes sample range)

ANODIZED									
ON DEMAND - MINIMUM QUANTITY 200 PCS									
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium				
05W - Light oak (strip)	09W - Red walnut (merbau-apple-walnut)	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir	29W - White oak	30W - Grey oak	31W - Victoria oak	
33W - Sawed oak	34W - Havana oak	36W - American oak	37W - Carvi oak	38W - Queens oak	39W - Grey elm	41W - Ice oak	42W - Grace oak	43W - Manhattan oak	
44W - Honey oak	45W - Morocco oak	46W - Black decap	47W - Black oak	48W - Cork oak	49W - Sand oak	93W - New white			

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

PROWALK 2510 & 2520 are new stair-nosing profiles for existing stairways. Designed to protect and restore stair steps made of wood, laminate, ceramic, etc. Made with anodized aluminium and wooden finishes. Available in self-adhesive or perforated versions. Sizes available: 2.7 m lengths and 0.9 m & 1.35 m Self-Pack.

PROWALK 2510 & 2520

ANODIZED ALUMINIUM AND WOODEN FINISHES
PUNCHED OR SELF ADHESIVE



ANODIZED ALUMINIUM with adhesive thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PWK... 2510A	24 x 10	5,94	16,04
PWK... 2520A	24 x 20	6,52	17,60

ANODIZED ALUMINIUM with adhesive thermo packed - bar length 0,90 lm - pack. 20 Pcs



Article	L x H mm	€/Pc
PWK... 25109AS	24 x 10	6,39
PWK... 25209AS	24 x 20	7,36



ANODIZED ALUMINIUM punched thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PWK... 2510F	24 x 10	4,46	12,04
PWK... 2520F	24 x 20	5,12	13,82

ANOD. ALUM. PUNCHED with screws and screw anchors thermo packed - bar length 0,90 lm - pack. 20 Pcs



Article	L x H mm	€/Pc
PWK... 25109FS	24 x 10	5,37
PWK... 25209FS	24 x 20	6,18

ANOD. ALUM. PUNCHED with screws and screw anchors thermo packed - bar length 1,35 lm - pack. 20 Pcs




Article	L x H mm	€/Pc
PWK... 251013FS	24 x 10	7,79

Available in the colours: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs).
The code of the selected colour must be added to the article code. E.g.: PWK... 2510A (chosen finish anod. silver) PWKAA 2510A.

ALUMINIUM WOOD FINISH with adhesive thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	L x H mm	€/lm	€/Pc
PWK... 2510A	24 x 10	9,89	26,70
PWK... 2520A	24 x 20	11,89	32,10

Available on demand in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W with a minimum quantity order of x pcs.
The code of the selected colour must be added to the article code. E.g.: PWK... 2510A (chosen finish dark beech) PWK04 2510A.

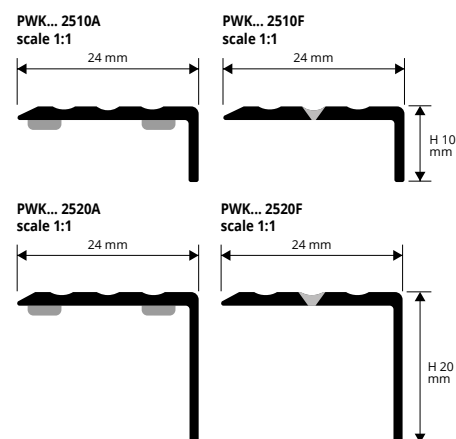

stair nosing profiles

EXAMPLES OF LAYING

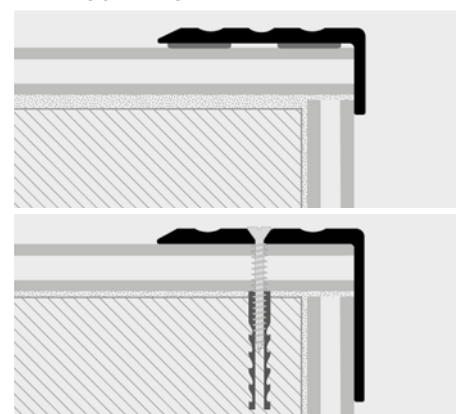

PROSTEP INS is a step cover profile in silver anodized aluminium ideal for protecting and laying laminated wood / floating melaminic and parquets. Available in two heights 10.5 and 16.

PROSTEP INS

ANODIZED SILVER ALUMINIUM



ANODIZED SILVER ALUMINIUM thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm	€/lm	€/Pc
PTSAA 105	10,2	6,52	17,60
PTSAA 16	15,9	7,02	18,95


COLOURS



AA - Anod. silver aluminium



EXAMPLES OF LAYING

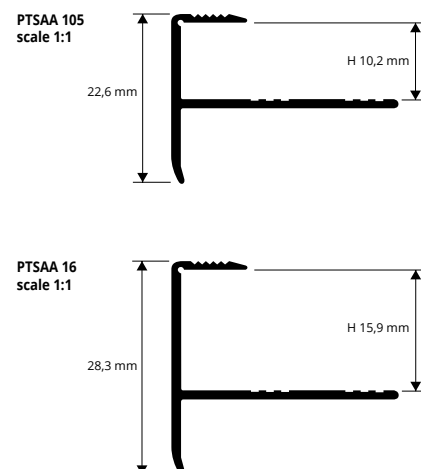

stair nosing profiles

WOODEN/LVT

* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

SOL 30 SELF-ADHESIVE


ALUMINIUM COVERED WITH PROTECTIVE FILM
IN WOODEN FINISHES

SOL 30 self-adhesive is a joint/threshold cover profile in aluminum covered with film wooden finishes, which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.

threshold - joint-cover profiles

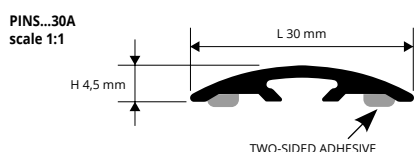

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

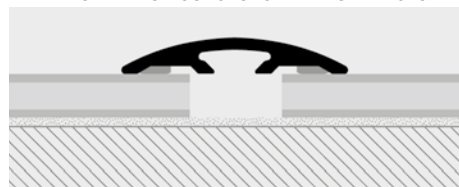

1. Choose the adhesive "SOL 30" in the required finish. 2. Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.



ALUMINIUM COVERED 80 wooden finishes (71 on demand) with ADHESIVE
thermo packed - length 30 mm - bar length 2,7 lm - pack 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINS...30A	30	11,25	30,38



ALUMINIUM COVERED 80 wooden finishes (71 on demand) with ADHESIVE - thermo packed - bar length 0,90 lm - 20 Pcs

Article	L mm	€/Pc
PINS...309AS	30	11,51


Available in the wooden finishes: 04W - 05W - 07W - 08W - 09W - 10W - 11W - 28W - 29W - 30W.
The code of the selected colour must be added to the article code. E.g.: PINS... 30A (chosen finish dark beech) PIN304W 30A.

ZERO CURVE SELF-ADHESIVE


ALUMINIUM COVERED WITH WOODEN FINISHES
AND ANODIZED ALUMINIUM

ZERO CURVE self-adhesive is a transition profile in anodised aluminum and aluminum covered with film in wooden finishes, which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.

transition profiles

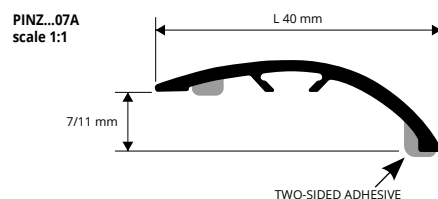

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

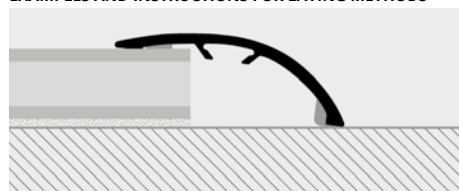

1. Choose the "ZERO CURVE" with adhesive with the required finish. 2. Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using an iron/steel hammer.



ALUMINIUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE
thermo packed - length 40 mm - bar length 2,7 lm - pack 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINZ...07A	40	17,46	47,14
PINZAA 07A	40	9,78	26,41



ALUMINIUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE thermo packed - bar length 0,90 lm - 20 Pcs

Article	L mm	€/Pc
PINZ...079AS	40	17,39

Available in the finish: AA - 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINZ... 07A (chosen finish dark beech) PINZ04W 07A.

COLOURS

ANODIZED								
AA - Anod. silver aluminium								
04W - Dark beech	05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut (merbau-apple-walnut)	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir	29W - White oak
30W - Grey oak	31W - Victoria oak	32W - Pink oak	33W - Sawed oak	34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak
39W - Grey elm	41W - Ice oak	42W - Grace oak	44W - Honey oak	45W - Morocco oak	46W - Black decapé	48W - Cork oak	49W - Sand oak	53W
54W	55W	65W - Tripoli	73W - Bangkok	75W - Liotard				

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

SOL 40P self-adhesive is a joint/threshold cover profile in aluminum covered with film in wooden finishes, which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.



SILVER ANODIZED ALUMINUM with ADHESIVE
thermo packed - length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PNSPAA 409 PAS	40	8,64	23,33

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE
thermo packed - length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PNSP.. 40 PA	40	15,86	42,82

Available in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PNSP... 40 PA (chosen finish dark beech) PNSP04W 40 PA.

SILVER ANODIZED ALUMINUM with ADHESIVE
thermo packed - bar length 90 cm - pack. 20 Pcs

Article	L mm	€/Pc
PNSPAA 409 PAS	40	8,57

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE - thermo packed - bar length 0,90 lm - 20 Pcs

Article	L mm	€/Pc
PNSP.. 409 PAS	40	16,18

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE - thermo packed - bar length 1 lm - 20 Pcs


Article	L mm	€/Pc
PNSPAA 4010 PAS	40	9,48

SILVER ANODIZED ALUMINUM with ADHESIVE
- thermo packed - bar length 1 lm - 20 Pcs


Article	L mm	€/Pc
PNSP.. 4010 PAS	40	17,73

SOL 40P SELF-ADHESIVE

ALUMINIUM COVERED WOODEN FINISHES



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the adhesive "SOL 40" in the required finish. 2. Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.

threshold - joint-cover profiles

PROCOVER WOOD is a joint-cover profile in aluminum covered with a very strong film available in wooden finishes. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.



ALUMINUM COVERED 80 wooden finishes (76 on demand) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	L x H mm	€/lm	€/Pc
PCRA... 149	14 x 9	6,29	16,98
PCRA... 269	26 x 9	11,06	29,86




Available in the wooden finishes: 05W - 11W - 28W - 29W - 30W.
The code of the selected colour must be added to the article code.
Es.: PCRA.. 149 (chosen finish light oak) PCRA04W 149.

PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM
IN WOODEN FINISHES

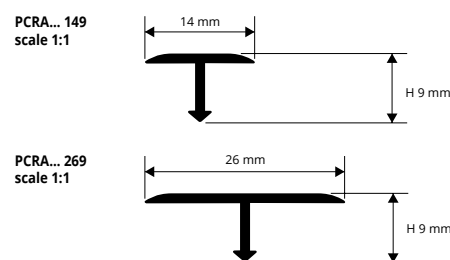

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

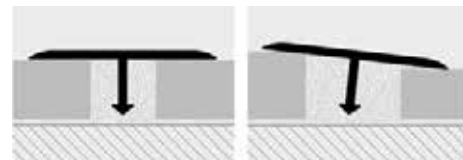

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm - 2/32" - 1/8" side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

threshold - joint-cover profiles

COLOURS



On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks.
Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

PROCOVER INSERT

VINYL RESIN / BLACK RUBBER


Vinyl resin/rubber profile "U-form" for inserting PROCOVER with PINBFT 45 or PINBFT 40 Proinsert System base.

VINYL RESIN / RUBBER
length 2,7 lm and/or in rolls

Article	€/lm	€/Roll
PCPCR	3,81	10,29


PROINSERT BASE 45 and BASE 40 - ALUM. PUNCHED/PERFORED
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PINBFT 45	45	6,07	16,39
PINBFT 40	40	5,99	16,17

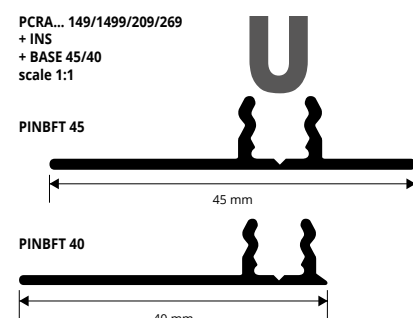


PROFIXER LINE SYSTEM

ZERO CURVE INSERTS + NYLON ANCHORS + BASE
WOODEN FINISHES AND ANODIZED FINISHES

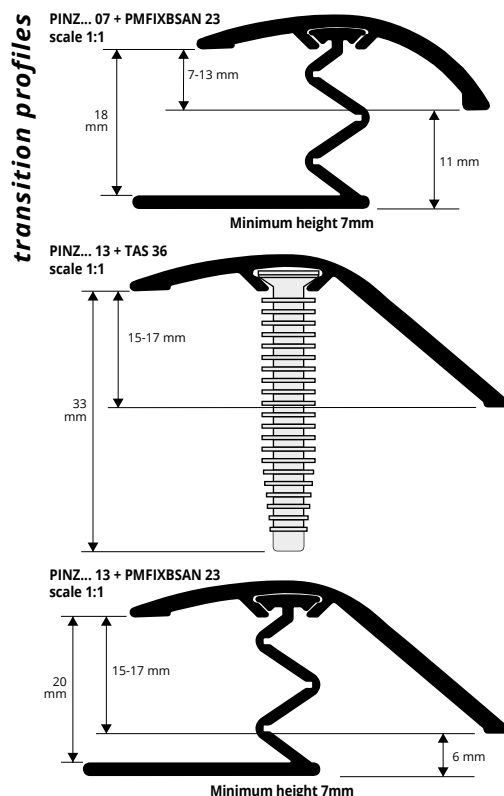

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



COLOURS

ANODIZED					
ON DEMAND - MINIMUM QUANTITY 200 PCS					
AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium	AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium
04W - Dark beech	05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut (merbau-apple-walnut)	13W - Indonesian teak	18W - Light zerbano
21W - Oak powder	25W - Bleached fir	29W - White oak	30W - Grey oak	31W - Victoria oak	32W - Pink oak
33W - Sawed oak	34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak
39W - Grey elm	41W - Ice oak	42W - Grace oak	44W - Honey oak	45W - Marocco oak	46W - Black decap
48W - Cork oak	49W - Sand oak	53W	54W	55W	65W - Tripoli
73W - Bangkok	75W - Liotard				

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

The **PROFIXER LINE SYSTEM** comprises an assortment of profiles in aluminium with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminium profile may be inserted for easy and invisible fixing.

The profiles are covered with wooden finishes that are highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Plus anodized finishes. The **PROFIXER LINE SYSTEM** profiles are recommended for floors up to 22.5 mm thick.



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	H mm	€/lm	€/Pc
PINZ... 07	40	7 - 13	7,92	21,38
PINZ... 13	47	15 - 17	11,37	30,70

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07.

ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 0,90 lm - 20 Pcs

Article	L mm	H mm	€/Pc
PINZ... 07S	40	7 - 13	9,82
PINZ... 13S	47	15 - 17	12,00

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 100 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07.

1. Choose the PROFIXER LINE SYSTEM profile in the required type and finish. 2. Cut the profile to the required length. 3a. For the version with screw anchors: make 5 drill holes per linear metre on the floor using a Ø 7mm drill, insert the anchors into the relative groove/channel of the profile and with the help of a rubber/plastic hammer, tap evenly over the surface until the anchor slots into the hole. 3b. For the version with tap-down aluminium base: first insert the base into the groove/channel of the "TOP" profile and then fix or glue the base to the floor; alternatively first fix or glue the base to the floor and then insert the 'profile'. 4. Close the profile, applying uniform pressure, either manually or with the help of a rubber hammer.


(For a precise assessment of colours request the wooden finishes sample range)

NYLON 36 SCREW ANCHORS AND TAP-DOWN BASE

SCREW ANCHORS 36 - H 36 mm - pack. 20 Pcs
for SOL 30-40-50 and ZERO CURVE 07-15


Article	H mm	€/Pc	€/Pack.
TAS 36	36	0,26	5,20

minimum order 5 pcs.



PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORATED
for SOL 30-40-50 and ZERO CURVE 07-15
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMFIXBSAN 23	23	6,42	17,33

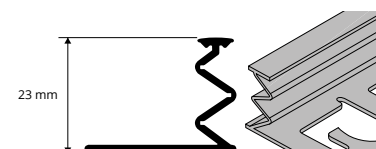

The **PROFIXER LINE SYSTEM** comprises an assortment of profiles in aluminium with a longitudinal dovetail groove/channel into which the anchors or the tap-down punched/perforated aluminium profile may be inserted for easy and invisible fixing.

The profiles are covered with wooden finishes that are highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Plus six anodized finishes (3 available on demand). The **PROFIXER LINE SYSTEM** profiles are recommended for floors up to 22.5 mm thick.

PROFIXER LINE SYSTEM

INSERTS SOL 30 - SOL 40P - SOL 50
+ NYLON ANCHORS + BASE



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINS... 30	30	5,79	15,63
PNSP... 40P	40	7,47	20,17

ANODIZED ALUM. (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 0,90 lm - 20 Pcs with 5 anchors

Article	L mm	€/lm	€/Pc
PINS... 309S	30	6,78	

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs)

ALUMINIUM COVERED (80 wooden finishes of which 71 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINS... 30	30	10,86	29,32

ALUM. COVERED (80 wooden finishes of which 71 on demand)
thermo packed - bar length 0,90 lm - 20 Pcs with 5 anchors

Article	L mm	€/lm	€/Pc
PINS... 309S	30	10,80	

Available in the wooden finishes: 04W - 05W - 07W - 08W - 09W - 10W - 11W - 28W - 29W - 30W.
The code of the selected colour must be added to the article code.
E.g.: PINS...30 (chosen finish dark beech) PINS04W 30.







ALUMINIUM COVERED (80 wooden finishes of which 49 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PNSP... 40 P	40	13,66	36,88

Available in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code.
E.g.: PINS... 30 (chosen finish anod. gold) PINSAO 30.

ANODIZED SILVER ALUMINIUM
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINSAA 50	50	8,21	22,17

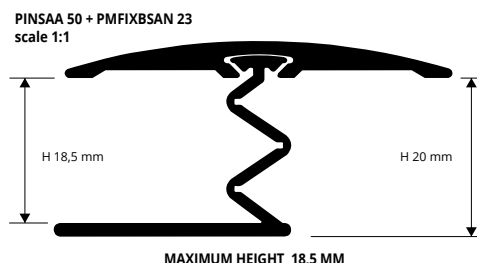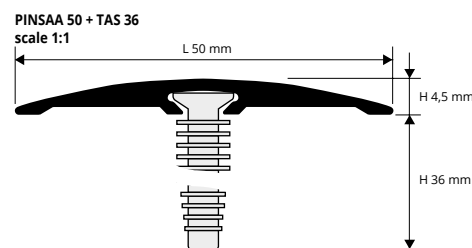


joints

NYLON 36 SCREW ANCHORS AND TAP-DOWN BASE

SCREW ANCHORS 36 - H 36 mm - pack. 20 Pcs
for SOL 30-40-50 and ZERO CURVE 07-15


Article	H mm	€/Pc	€/Pack.
TAS 36	36	0,26	5,20

minimum order 5 pcs.




PROFIXER TAP-DOWN BASE - ALUM. PUNCHED/PERFORATED
for SOL 30-40-50 and ZERO CURVE 07-15
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm	€/lm	€/Pc
PMFIXBSAN 23	23	6,42	17,33



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

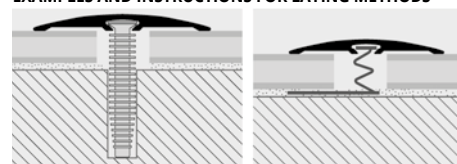

1. Choose the PROFIXER LINE SYSTEM profile in the required type and finish. 2. Cut the profile to the required length.

For the version with screw anchors:

3. Make 5 drill holes per linear metre on the floor using a Ø 7mm drill, insert the anchors into the relative groove/channel of the profile and with the help of a rubber/plastic hammer, tap evenly over the surface until the anchor slots into the hole.

For the version with tap-down aluminium base:



3. First insert the base into the groove/channel of the "TOP" profile and then fix or glue the base to the floor; alternatively first fix or glue the base to the floor and then insert the 'profile. 4. Close the profile, applying uniform pressure, either manually or with the help of a rubber hammer.

PROSCREW 34

ANODIZED SILVER, GOLD, BRONZE, SAND
AND CHAMPAGNE ALUMINIUM

universal joints with screw

PSWC... 34
scale 1:1

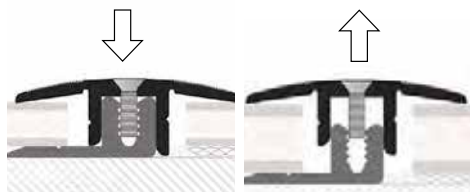

BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND
CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWCAA 34	34	15,65	42,26
PSWCAO 34	34	15,65	42,26
PSWCSB 34	34	15,65	42,26
PSWCAB 34	34	16,42	44,33
PSWCCH 34	34	16,42	44,33

To order the following items (top and base), see page 259
Add + 5% of the price €/lm for the self pack version 0,90 lm


TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND
CHAMPAGNE ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWAA 34	34	8,59	23,19
PSWAO 34	34	8,59	23,19
PSWSB 34	34	8,59	23,19
PSWAB 34	34	9,44	25,49
PSWCH 34	34	9,44	25,49

BASE IN NATURAL ALUMINIUM
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWBAN 07F	22,6	5,61	15,15


PSWBAN 07F



PROSCREW 44

ANODIZED SILVER, GOLD, BRONZE, SAND
AND CHAMPAGNE ALUMINIUM

PSWC... 44
scale 1:1



BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND
CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWCAA 44	44	16,42	44,33
PSWCAO 44	44	16,42	44,33
PSWCSB 44	44	16,42	44,33
PSWCAB 44	44	17,24	46,55
PSWCCH 44	44	17,24	46,55

To order the following items (top and base), see page 259
Add + 5% of the price €/lm for the self pack version 0,90 lm


TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND
CHAMPAGNE ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWAA 44	44	9,69	26,16
PSWAO 44	44	9,69	26,16
PSWSB 44	44	9,69	26,16
PSWAB 44	44	10,66	28,78
PSWCH 44	44	10,66	28,78

BASE IN NATURAL ALUMINIUM
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWBAN 07F	22,6	5,61	15,15


PSWBAN 07F



PROSCREW 33

ANODIZED SILVER, GOLD, BRONZE, SAND
AND CHAMPAGNE ALUMINIUM

PSWC... 33
scale 1:1

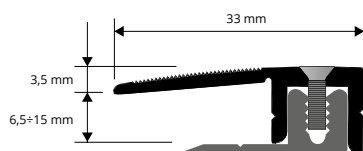

BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND
CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWCAA 33	33	15,65	42,26
PSWCAO 33	33	15,65	42,26
PSWCSB 33	33	15,65	42,26
PSWCAB 33	33	16,42	44,33
PSWCCH 33	33	15,68	42,34

To order the following items (top and base), see page 259
Add + 5% of the price €/lm for the self pack version 0,90 lm


TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND
CHAMPAGNE ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWAA 33	33	8,59	23,19
PSWAO 33	33	8,59	23,19
PSWSB 33	33	8,59	23,19
PSWAB 33	33	9,44	25,49
PSWCH 33	33	9,44	25,49

BASE IN NATURAL ALUMINIUM
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWBAN 07F	22,6	5,61	15,15

PSWBAN 07F



COLOURS


ANODIZED



AA - Anod. silver alum.

ON DEMAND (minimum quantity 100 pcs)

ANODIZED



AO - Anod. gold alum.

AB - Anod. bronze alum.

CH - Anod. champagne alum.

SB - Anod. sand alum.

* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.

Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.



BASE + TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM + SCREWS AND SCREW ANCHORS
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	L mm	€/lm	€/Pc
PSWCA 50	50	17,12	46,22
PSWCAO 50	50	17,12	46,22
PSWCSB 50	50	17,12	46,22
PSWCAB 50	50	17,82	48,11
PSWCCH 50	50	17,82	48,11

To order the following items (top and base), see page 259
Add + 5% of the price €/lm for the self pack version 0,90 lm

COLOURS



ON DEMAND (minimum quantity 100 pcs)




TOP IN ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PSWAA 50	50	10,82	29,21
PSWAO 50	50	10,82	29,21
PSWSB 50	50	10,82	29,21
PSWAB 50	50	11,91	32,16
PSWCH 50	50	11,91	32,16

BASE IN NATURAL ALUMINIUM
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm




Article	L mm	€/lm	€/Pc
PSWBAN 07F	22,6	5,61	15,15



PROSCREW 50

ANODIZED SILVER, GOLD, BRONZE, SAND AND CHAMPAGNE ALUMINIUM

PSWC... 50
scale 1:1

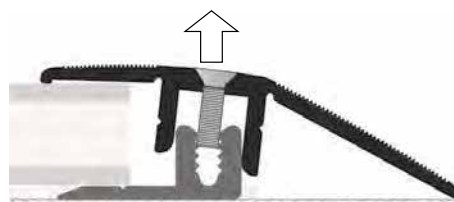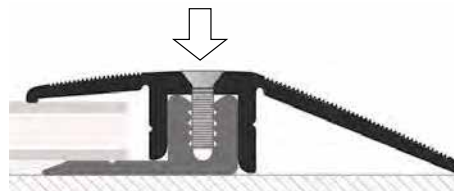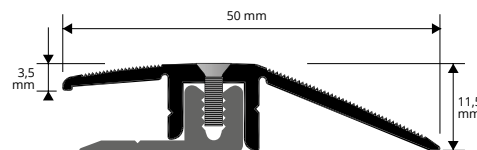

universal joints with screw

SCREWS to fix all perforated versions

NICKEL PLATED

WHITE NICKEL-PLATED FLATHEAD SCREW UNI 7688 3X10

pack. 14 Pcs


Article	Ø mm	H mm	€/Pack.
VIZBP 310	05	10	3,73

WHITE NICKEL-PLATED FLATHEAD SCREW UNI 7688 3X16


pack. 14 Pcs

Article	Ø mm	H mm	€/Pack.
VIZBP 316	05	16	3,73

VIZBP 310



VIZBP 316




KIT PROSCREW

KIT PROSCREW

Article	€/KIT
KIT PROSCREW	6,22

KIT consists of 14 screws VIZBP 310, 14 screws VIZBP 316, 15 screws + screw anchors VINPT 325

KIT PROSCREW

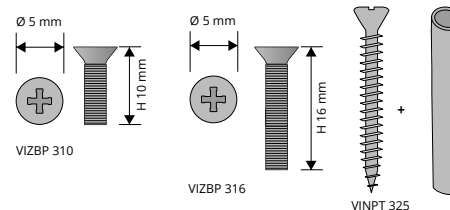

EXAMPLES OF LAYING



* = Production on demand with minimum quantity of 200 pcs. Production delay 4/5 weeks. Price to be agreed.


Prices are referred to whole packs 10% increase for minimum orders of 10 Pcs 20% increase for orders of less than 10 Pcs.

PROMULTISKIRT SQUARE



FOAMED VINYL RESIN

PROMULTISKIRT SQUARE is an expanded vinyl resin profile covered with a vinyl resin film available in white, black, silver and wood finishes. The profile has a good resistance to chemical agents and can be secured to the wall with plastic supports fixed with screws or silicone. The skirting height is 100 mm, it can be cut to 80 and 60 mm heights thanks to the pre-incisions on the back. PROMULTISKIRT SQUARE in expanded vinyl resin coated with vinyl resin film is suitable for any indoor environment.

BTEPR... 108614/S
Scale 1:1



BTEPRS 18/100
Scale 1:1

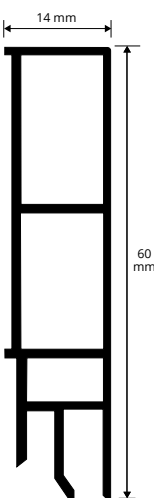

FOAMED VINYL RESIN (wood finishes - black - white and silver)
bar length 2,4 lm - pack 20 Pcs - 48 lm

Article	L mm	€/lm	€/Pc
BTEPR... 108614/S	100/80/60	8,39	20,14

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: BTEPR...108614/S (chosen finish Havana oak) BTEPR34W 108614/S



PATENTED

SUPPORT / FIXING CLIP - PLASTIC
pack 100 Pcs

Article	H mm	€/pack.
BTEPRS 18	16,5	12,08

Order the SUPPORT and choose the SKIRTING in the desired finish.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS

29W - White oak	30W - Grey oak	34W - Havana oak	B - White	N - Black	AA - Silver

On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks.
Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

LAYING INSTRUCTIONS

1. Choose "PROMULTISKIRT SQUARE" according to the chosen colour. 2. Cut "PROMULTISKIRT SQUARE" to the required length. 3. if necessary cut "PROMULTISKIRT SQUARE" to the required height. * 4. Carefully clean the substrate on which the profile will be placed from oil, grease and dirt residues in general.

Laying with adhesive only:

5a. . With dry surface apply the Proband Fix. 6a. Press the profile against the wall with the correct pressure.


Laying with adhesive and support:

5b. Fix the plastic supports to the wall every 50mm with screws. 6b. Apply Proband Fix only to the back upper part of the skirting board. 7b. Fix the profile to the supports and press it against the wall with correct pressure.

*CUT INSTRUCTIONS



Option 1A: Cut to have the height 80 mm.
Cut along the first pre-incision on the back of the skirting;



Option 1B: Cut to have the height 60 mm.
Cut along the second pre-incision on the back of the skirting;




2. Cut the skirting on the front side at the cut previously made on the back;



3. Remove the excess part.

EXAMPLE OF LAYING

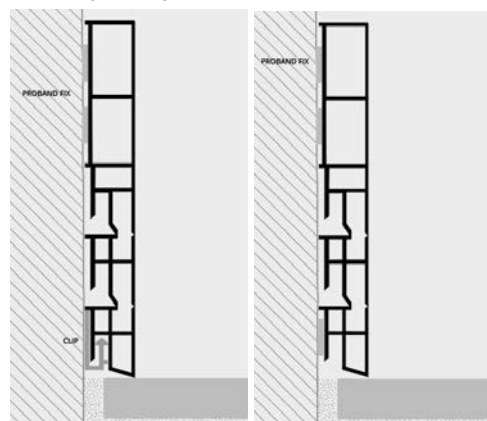

CORNERS, END CAPS AND JOINTS

FOAMED VINYL RESIN

INTERNAL CORNER KIT



KIT BTEPR ... 108614/SI

EXTERNAL CORNER KIT



KIT BTEPR ... 108614/SE

IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)

Article	H mm	€/KIT
KBTEPR...108614/SI	100/80/60	15,63
KBTEPR...108614/SE	100/80/60	15,63

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: KBTEPR...108614/S (chosen finish Havana oak) KBTEPR34W 108614/S

PROMULTISKIRT ROUND is an expanded vinyl resin profile covered with a vinyl resin film available in white, black, silver and wood finishes. The profile has a good resistance to chemical agents and can be secured to the wall with plastic supports fixed with screws or silicone. The skirting height is 100 mm, it can be cut to 80 and 60 mm heights thanks to the pre-incisions on the back. PROMULTISKIRT ROUND in expanded vinyl resin coated with vinyl resin film is suitable for any indoor environment.

PROMULTISKIRT ROUND

FOAMED VINYL RESIN

PATENTED



FOAMED VINYL RESIN (wood finishes - black - white and silver)
bar length 2,4 lm - pack. 20 Pcs - 48 lm

Article	L mm	€/lm	€/Pc
BTEPR... 108614/R	100/80/60	8,39	20,14

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: BTEPR... 108614/R (chosen finish Havana oak) BTEPR34W 108614/R



SUPPORT / FIXING CLIP - PLASTIC
pack. 100 Pcs

Article	H mm	€/pack.
BTEPRS 18	16,5	12,08

Order the SUPPORT and choose the SKIRTING in the desired finish.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS

(For a precise assessment of colours request the wood finishes sample range)

29W - White oak	30W - Grey oak	34W - Havana oak	B - White	N - Black	AA - Silver

On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks.
Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

LAYING INSTRUCTIONS

1. Choose "PROMULTISKIRT ROUND" according to the chosen colour. 2. Cut "PROMULTISKIRT ROUND" to the required length. 3. if necessary cut "PROMULTISKIRT ROUND" to the required height. * 4. Carefully clean the substrate on which the profile will be placed from oil, grease and dirt residues in general.

Laying with adhesive only:

5a. . With dry surface apply the Proband Fix. 6a. Press the profile against the wall with the correct pressure.

Laying with adhesive and support:

5b. Fix the plastic supports to the wall every 50mm with screws. 6b. Apply Proband Fix only to the back upper part of the skirting board.


7b. Fix the profile to the supports and press it against the wall with correct pressure.



Option 1A: Cut to have the height 80 mm.
Cut along the first pre-incision on the back of the skirting;



Option 1B: Cut to have the height 60 mm.
Cut along the second pre-incision on the back of the skirting;




2. Cut the skirting on the front side at the cut previously made on the back;




3. Remove the excess part.


BTEPR... 108614/R
scale 1:1

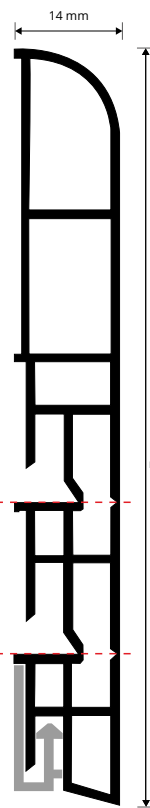

BTEPRS 18/100
scale 1:1

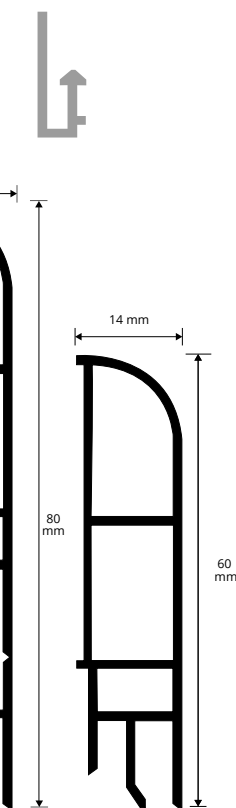

EXAPLE OF LAYING

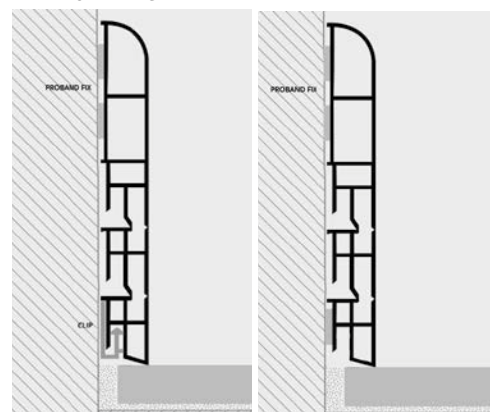

CORNERS, END CAPS AND JOINTS

FOAMED VINYL RESIN

IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)

Article	H mm	€/KIT
KBTEPR...108614/RI	100/80/60	15,63
KBTEPR...108614/RE	100/80/60	15,63

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: KBTEPR...108614/S (chosen finish Havana oak) KBTEPR34W 108614/S

INTERNAL CORNER KIT



KIT BTEPR ...108614/RI

EXTERNAL CORNER KIT




KIT BTEPR ...108614/RE

SKIRTING 7016


FOAMED VINYL RESIN

SKIRTING 7016 is a vinyl resin foam profile with a height of 70 mm. available wooden finishes and finishes in solid colour that could be matched with the PROINSERT SYSTEM's profiles. The profile, suitable like skirting for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, nails, screws or using the pre-punched support fixed to the wall with screws every 57 cm. Its special section, that allows to cover a 16 mm perimetral joint, and wide range of finishes make it a very requested, elegant and economic skirting profile.

BTEPR... 7016
scale 1:1

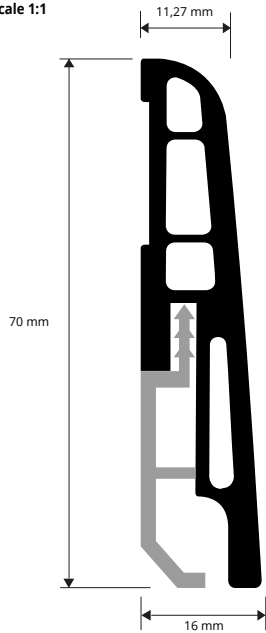

BTEPRS 385/100
scale 1:1



FOAMED VINYL RESIN (wood finishes - black - white and silver)
Length = 2,5 m - Pack 20 pcs - 50 lm

Article	L mm	€/lm	€/Pc
BTEPR... 7016	70	4,42	11,05

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



SUPPORT / FIXING CLIP - PLASTIC
support Length 5 cm

Article	H mm	€/pack.
BTEPRS 385	37,5	12,08

Order the SUPPORT and choose the SKIRTING in the desired finish.


IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)

Article	H mm	€/KIT
KIT BTEPR ...7016I	70	11,13
KIT BTEPR ...7016E	70	11,13

INTERNAL CORNER KIT



EXTERNAL CORNER KIT

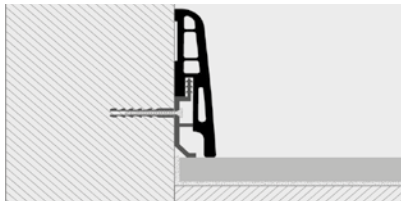

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS


1. Choose "Skirting 7016" in the desired finish. 2. Fix the pre-punched support to the wall with screws every 50 cm.
3. Attach the profile to the support applying low pressure.
4. Alternatively fix the profile using a suitable fast adhesive, nails or screws

COLOURS

(For a precise assessment of colours request the wood finishes sample range)

04W - Dark oak	05W - Light oak	13W - Teak Indonesia	18W - Light Zerbano	21W - Powder Oak	25W - Bleached fir	29W - White oak	30W - Gray oak	31W - Victoria oak	33W - Sawed oak
34W - Havana oak	35W - Edimburgo oak	36W - American oak	37W - Carvi oak	38W - Queens oak	39W - Grey elm	41W - Ice oak	42W - Grace oak	45W - Morocco oak	46W - Black decap
53W	54W	55W	B - White	N - Black	AA - Silver				

On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

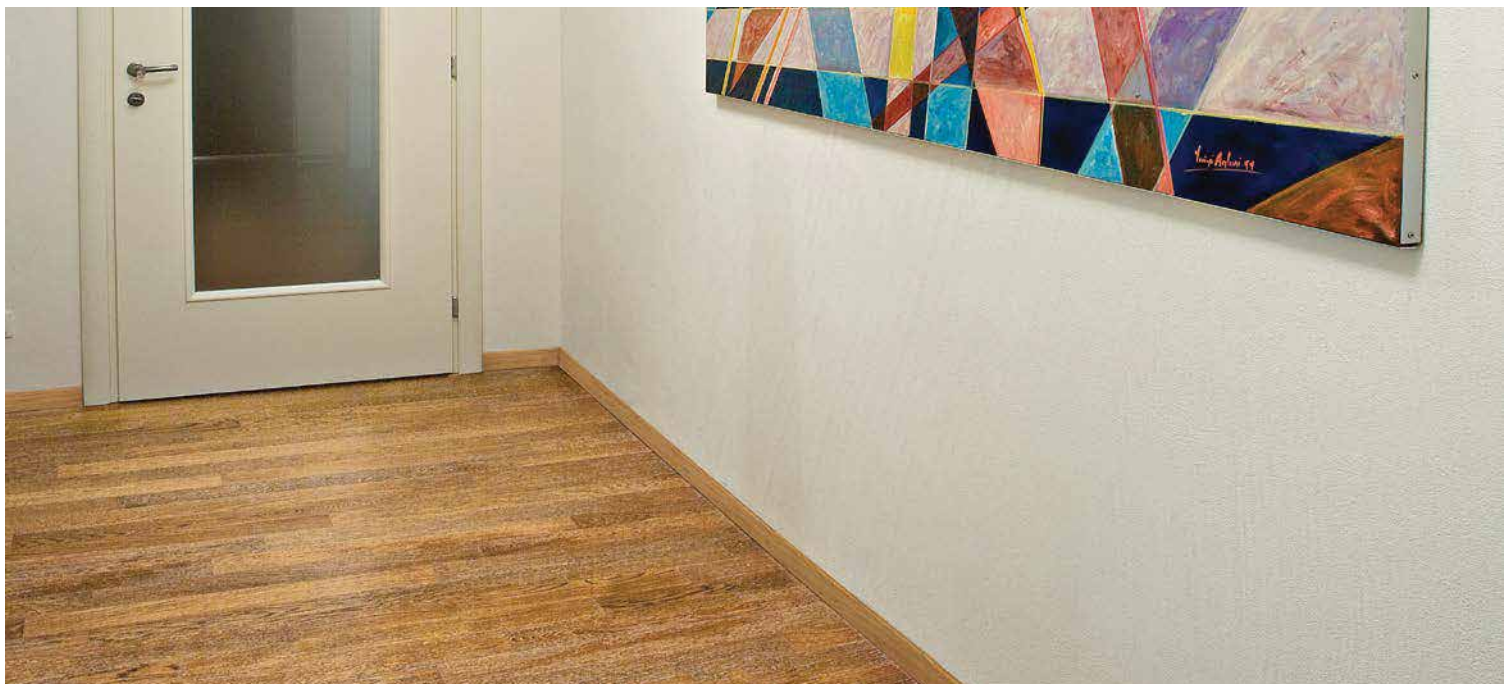

SKIRTING 7011 is a vinyl resin foam profile with a height of 70 mm x 10,5 mm, available in wooden finishes and finishes standard colours that could be matched with the PROINSERT SYSTEM's profiles. Suitable as Basebord for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, or else with nails.

SKIRTING 7011

FOAMED VINYL RESIN



FOAMED VINYL RESIN (wood finishes - black - white and silver)
Length = 2,5 m - Pack 20 pcs - 50 lm

Article	H mm	€/lm	€/pc
BTEPR... 7011	70	4,22	10,55



IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)

Article	H mm	€/KIT
KIT BTEPR ...7011I	70	9,89
KIT BTEPR ...7011E	70	9,89

INTERNAL CORNER KIT

EXTERNAL CORNER KIT



KIT BTEPR...7011I

KIT BTEPR...7011E

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL




COLOURS


(For a precise assessment of colours request the wood finishes sample range)

05W - Light oak	07W - Light cherry	09W - Red walnut	18W - Light Zebano	21W - Powder Oak	29W - White oak	30W - Gray oak	31W - Victoria oak	32W - Pink oak	34W - Havana oak
35W - Edimburgo oak	37W - Carvi oak	40W - Brown oak	41W - Ice oak	42W - Grace oak	43W - Manhattan oak	44W - Honey oak	46W - Black decap	47W - Black oak	48W - Cork oak
49W - Sand oak	65W - Tripoli	73W - Bangkok	75W - Liotard	B - White	N - Black	AA - Silver			

On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

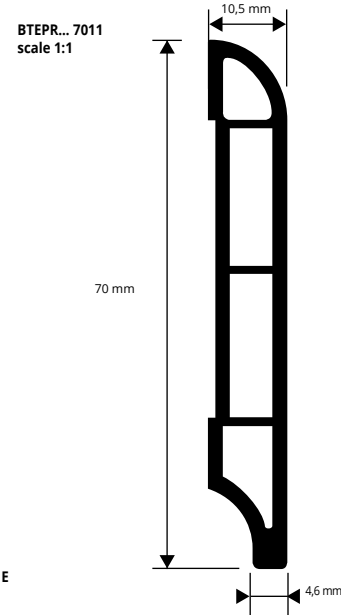

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the "Skirting 7011" in the required the colour. 2. Lay the "Skirting 7011" using quick-setting suitable adhesive for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with nails.

SKIRTING 40 is a vinyl resin foam profile with a height of 40 mm x 10 mm, available in wooden finishes and finishes standard colours that could be matched with the PROINSERT SYSTEM's profiles. Suitable as Basebord for floating and glued wood floor, laminate and LVT, could be laid with suitable adhesive, or else with nails.

SKIRTING 40

FOAMED VINYL RESIN



FOAMED VINYL RESIN (wood finishes - black - white and silver)
Length = 2,4 m - Pack. 20 PCS - 48 Lm

Article	H mm	€/lm	€/pc
BTEPR... 4010	40	4,22	10,13

Available in the finishes: 29W - 30W - 34W - B - N - AA.
The code of the selected colour must be added to the article code.
E.g.: BTEPR... 4010 (chosen finish Havana oak) BTEPR34W 4010

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS

(For a precise assessment of colours request the wood finishes sample range)

29W - White oak	30W - Grey oak	34W - Havana oak	B - White	N - Black	AA - Silver
-----------------	----------------	------------------	-----------	-----------	-------------


On request it is possible to realize other finishes of the color range: minimum order 400 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

IN/EXTERNAL CORNERS and END CAPS KIT
(wood finishes - black - white and silver)


Article	H mm	€/KIT
KIT BTEPR ...4010I	40	6,34
KIT BTEPR ...4010E	40	6,34

KIT BTEPR...4010I
INTERNAL CORNER KIT


KIT BTEPR...4010E
EXTERNAL CORNER KIT



BTEPR... 4010
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

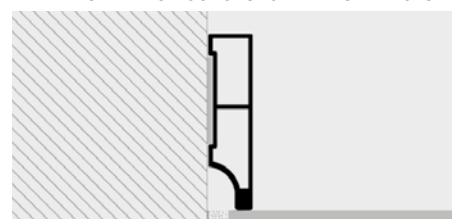


1. Choose the "Skirting 40" in the required the colour. 2. Lay the "Skirting 40" using quick-setting suitable adhesive for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with nails.


PROSEAL WOOD

EXPANDED PVC
2 WOOD FINISHING AND 4 MATCHING COLOURS

PSAW... 20
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

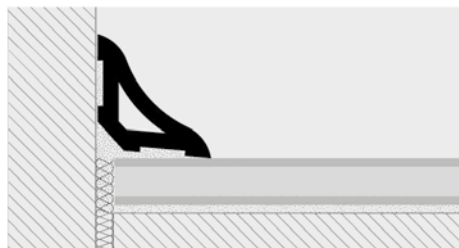

1. Choose "PROSEAL WOOD" color and/or wood finish required.
2. The laying must be carried out using fast fixing acrylic silicone, mastic, bostik suitable for gluing PVC with mortar - plaster - wall units etc., or fix using screws/nails.

PROSEAL WOOD is a new inner connector square suitable for creating a concave skirting for wood / rolled-melamine floating wood / ceramic / marble tiles to reduce the floor /covering detachment. The particular material used allows to resist to the main chemical agents ant to small breakages. **PROSEAL WOOD's** dimensions allow the necessary expansion of the outer joint. Ideal for public (schools, rest homes, recreational area) and private places. In expanded PVC , in 2 wood finishes 4 in matching colours to combine with various wood finishes. Easy to lay with fixing silicone.



EXPANDED PVC - 2 WOOD FINISHING
bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L mm	€/lm	€/Pc
PSAW... 20	21 x 21	0,93	2,23

Available in the wood finishes: 05W - 10W, and colours: B - GC - GS - N.
The code of the selected colour must be added to the article code. E.g.: PSAW...20 (chosen finish black) PSAWN 20.



EXPANDED PVC - 4 COLOURS
bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L mm	€/lm	€/Pc
PSAW... 20	21 x 21	0,87	2,17

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS


B - White	GC - Light gray	GS - Dark gray	N - Black	05W - Light oak (strip)	10W - Wengé (panga panga-wengé)

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.


PROANGLE WOOD

EXPANDED PVC
2 WOOD FINISHING AND 4 MATCHING COLOURS

PGAW... 15
scale 1:1



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

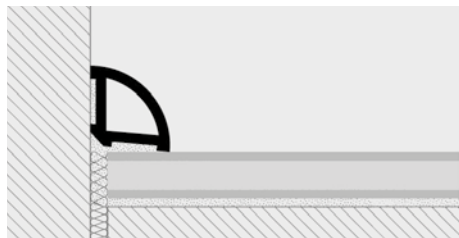

1. Choose "PROANGLE WOOD" color and/or wood finish required.
2. The laying must be carried out using fast fixing acrylic silicone, mastic, bostik, suitable for gluing PVC with mortar-plaster-wall units etc., or fix using screws/nails.

PROANGLE WOOD is a new inner connector square suitable for creating a convex skirting for wood / rolled-melamine floating wood / ceramic / marble floor to reduce the floor /covering detachment. The particular material used allows to resist to the main chemical agents and to small breakages. **PROANGLE WOOD's** dimensions allow the necessary expansion of the outer joint. Ideal for public (schools, rest homes, recreational area) and private places. In expanded PVC , in 2 wood finishes 4 in matching colors to combine with various wood finishes. Easy to lay with fixing silicone.



EXPANDED PVC - 2 WOOD FINISHING
bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L mm	€/lm	€/Pc
PGAW... 15	15 x 15	0,70	1,75

Available in the wood finishes: 05W - 10W, and colours: - GC - GS - N.
The code of the selected colour must be added to the article code. E.g.: PGAW...15 (chosen finish black) PGAWN 15.



EXPANDED PVC - 4 COLOURS
bar length 2,5 lm - pack. 40 Pcs - 100 lm

Article	L mm	€/lm	€/Pc
PGAW... 15	15 x 15	0,64	1,60

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL



COLOURS

B - White	GC - Light gray	GS - Dark gray	N - Black	05W - Light oak (strip)	10W - Wengé (panga panga-wengé)

The shade of the wooden finish in rigid expanded vinyl resin/PVC results slightly different from the film usually applied on the profiles in aluminium.

SKIRTING in PVC foam height 70 mm in 12 finishes: 4 in semi-matt black-grey-white and 8 wooden finishes to be matched with the PROINSERT SYSTEM profiles for floating laminated wood floors and traditional parquet floors. Laying is done by gluing (acetic silicone - acrylic - mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments. Easy to match with many wood species.

SKIRTING

EXPANDED VINYL RESIN



EXPANDED RIGID VINYL RESIN (black - light and dark grey - white)
bar length 2 lm - pack. 60 Pcs - 120 lm

Article	H mm	€/lm	€/Pc	€/Pack.
BTPR... 70	70	1,21	2,42	145,20

EXPANDED RIGID VINYL RESIN (8 wooden finishes)
bar length 2 lm - pack. 60 Pcs - 120 lm

Article	H mm	€/lm	€/Pc	€/Pack.
BTPR... 70	70	1,21	2,42	145,20

Available in the colours: B - GC - GS - N - 04W - 05W - 06W - 07W - 08W - 09W - 10W - M.
The code of the selected colour must be added to the article code. E.g.: BTPR... 70 (chosen colour black) BTPRN 70.

COLOURS

B - White	GC - Light grey	GS - Dark grey	N - Black	04W - Dark beech	05W - Light oak (strip)
06W - Dark oak (Walnut)	07W - Light cherry (strip)	08W - Dark cherry (board)	09W - Red walnut (Merbau-Apple-Walnut)	10W - Wengé (Panga-Panga - Wengé)	M - Mahogany

The shade of the wooden finish in rigid expanded vinyl resin/pvc results slightly different from the film usually applied on the profiles in aluminum.

BTPR...70



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

1. Choose the "SKIRTING" in the required the colour. 2. Lay the skirting using quick-setting acrylic silicone, mastic or bostik, suitable for gluing flexible PVC onto mortar-plaster-accessorised walls, etc. or fix with screws/nails.

USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

ANGLE BAR produced in expanded PVC in 12 finishes: 4 colours in semi-matt, black-grey-white and 8 wooden finishes used to protect angles. Laying is done by gluing (acetic silicone - acrylic - mastic) or using screws or nails. Attractive, strong, hardwearing and economic, it is easy to lay and ideal for many public premises (hospitals, schools, gymnasiums, rest homes and creative areas) and private environments. Easy to match with many wood species.

ANGLE BAR

EXPANDED VINYL RESIN



EXPANDED RIGID VINYL RESIN (black - light and dark grey - white)
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
AGE... 25	25 x 25	1,08	2,92




EXPANDED RIGID VINYL RESIN (8 wooden finishes)
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
AGE... 25	25 x 25	1,11	3,00


Available in the colours: B - GC - GS - N - 04W - 05W - 06W - 07W - 08W - 09W - 10W - M.
The code of the selected colour must be added to the article code. E.g.: AGE... 25 (chosen colour black) AGEN 25.

The shade of the wooden finish in rigid expanded vinyl resin/pvc results slightly different from the film usually applied on the profiles in aluminum.

AGE...25
scale 1:1



EXAMPLE OF LAYING



USE PROBAND FIX FOR FIXING THE PROFILE TO THE WALL

LVT PROFILES - SOL 30P

ALUMINIUM ANODIZED FINISHES AND WOODEN FINISHES


ALUMINIUM TOP 80 wooden fin. "...W" (56 on demand), 6 anodized fin. (3 on demand) **thermo packed** - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PNSP... 3046	30	4,36	11,77
PNSP...W 3046	30	7,47	20,17

Available in the anodized finishes: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 05W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 33W - 34W - 36W - 37W - 38W - 39W - 41W - 42W - 43W - 44W - 45W - 46W - 47W - 48W - 49W. The code of the selected colour must be added to the article code. E.g.: PNSP... 3046 (chosen finish anod. gold) PNSPAO 3046.

ALUMINIUM TOP (anod. silver) **thermo packed** - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PNSPAA 4046	40	4,66	12,58



BASE (vinyl resin/PVC) - bar length 2,7 lm

Article	L mm	€/lm	€/Pc
PINBFT 3646	36	2,36	6,37



LVT PROFILES - ZERO CURVE

ALUMINIUM ANODIZED FINISHES AND WOODEN FINISHES

ALUMINIUM TOP 80 wooden fin. "...W" (56 on demand), 6 anodized fin. (3 on demand) **thermo packed** - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINZ... 2646	26	4,36	11,77
PINZ...W 2646	26	7,47	20,17

ALUMINIUM TOP (anod. silver) **thermo packed** - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINZAA 3246	32	4,66	12,58



BASE (vinyl resin/PVC) - bar length 2,7 lm

Article	L mm	€/lm	€/Pc
PINBFT 2346	23	2,36	6,37



LVT PROFILES - TERMINAL PIN


ALUMINIUM ANODIZED FINISHES AND WOODEN FINISHES

ALUMINIUM TOP 80 wooden fin. "...W" (56 on demand), 6 anodized fin. (3 on demand) **thermo packed** - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINTP... 1946	19	4,36	11,77
PINTP...W 194	19	7,47	20,17


ALUMINIUM TOP (anod. silver) **thermo packed** - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L mm	€/lm	€/Pc
PINTPAA 2546	25	4,66	12,58



BASE (vinyl resin/PVC) - bar length 2,7 lm

Article	L mm	€/lm	€/Pc
PINBFT 2346	23	2,36	6,37




SOL 30 (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

joints

PINS... 30
scale 1:1



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINS... 30	30	5,79	15,63

Available in the anodized finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W.

The code of the selected colour must be added to the article code. E.g.: PINS... 30 (chosen finish anod. gold) PINSAO 30.

ALUMINIUM COVERED (80 wooden finishes of which 71 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	L mm	€/lm	€/Pc
PINS... 30	30	10,86	29,32

TERMINAL PIN (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

terminal
outcroppings

PINTP... 10
scale 1:1



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm	€/lm	€/Pc
PINTP... 10	10	8,43	22,76

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PINTP... 10 (chosen finish anod. gold) PINTPAO 10.

ALUMINIUM COVERED (80 wooden finishes of which 49 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm


Article	L mm	€/lm	€/Pc
PINTP...	10	14,24	38,45

ZERO CURVE 07-09-13-15 (only top)


WOODEN-FINISHES AND ANODIZED FINISHES

transition
profiles


PINZ... 07
scale 1:2




PINZ... 09
scale 1:2



PINZ... 13
scale 1:2



PINZ... 15
scale 1:2



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm
pack. 20 Pcs - 54 lm (H 7 - H 9 mm - 108 lm)

Article	H mm	€/lm	€/Pc
PINZ... 07	7 / 11	7,92	21,38
PINZ... 09	11 / 14	8,61	23,25
PINZ... 13	15 / 17	11,37	30,70
PINZ... 15	19 / 22	11,92	32,18

Available in the anodized finishes: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PINZ... 07 (chosen finish anod. gold) PINZAO 07.

ALUMINIUM COVERED (80 wooden finishes of which 49 on demand)
thermo packed - bar length 2,7 lm
pack. 20 Pcs - 54 lm (H 7 - H 9 mm - 108 lm)


Article	H mm	€/lm	€/Pc
PINZ... 07	7 / 11	14,52	39,20
PINZ... 09	11 / 14	15,07	40,69
PINZ... 13	15 / 19	17,24	46,55
PINZ... 15	19 / 22	18,83	50,84

STYLE STAIR (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

stair nosing
profiles

PINY...



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PINY...	27,5 x 25	9,04	24,41

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 05W - 07W - 09W - 18W - 21W - 25W - 30W - 31W - 32W - 34W - 35W - 37W - 41W - 42W - 44W - 46W - 48W - 49W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PINY... (chosen finish anod. gold) PINYAO.

ALUMINIUM COVERED (80 wooden finishes of which 60 on demand)
thermo packed - bar length 2,7 lm - pack. 10 Pcs - 27 lm


Article	L x H mm	€/lm	€/Pc
PINY...	27,5 x 25	15,25	41,18

STYLE STAIR L (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

stair nosing
profiles

PINYL...



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm	€/lm	€/Pc
PINYL...	45 x 23,8	9,95	26,86

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 04W - 05W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 53W - 54W - 55W.

The code of the selected colour must be added to the article code. E.g.: PINYL... (chosen finish anod. gold) PINYLAO.

ALUMINIUM COVERED (80 wooden finishes of which 57 on demand)
thermo packed - bar length 2,7 lm - pack. 10 Pcs - 27 lm


Article	L x H mm	€/lm	€/Pc
PINYL...	45 x 23,8	16,78	45,31

SOL 40 P (only top)

WOODEN-FINISHES AND ANODIZED FINISHES

joints

PNSP... 40P
scale 1:1



ANODIZED ALUMINIUM (6 anod. alum. finishes of which 3 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm	€/lm	€/Pc
PNSP... 40P	40	7,47	20,17

Available in the colours: AO - AA - AB (AT, CH and SB on demand with a minimum quantity order of 200 pcs) 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.

The code of the selected colour must be added to the article code. E.g.: PNSP... 40P (chosen finish anod. gold) PNSPAO 40P.

ALUMINIUM COVERED (80 wooden finishes of which 49 on demand)
thermo packed - bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	L x H mm	€/lm	€/Pc
PNSP... 40P	40	13,66	36,88


INTERCHANGEABLE INSERT

RIGID IMPACT-RESISTANT
NO-TOXIC VINYL RESIN

RIGID IMPACT-RESISTANT NO-TOXIC VINYL RESIN
bar length 2,7 lm - pack. 20 Pcs - 54 LM

Article	H mm	€/lm	€/Pc
PIN 07	7	1,28	3,46
PIN 09	9	1,40	3,78
PIN 11	11	1,54	4,16
PIN 13	13	1,68	4,54
PIN 15	15	1,81	4,89
PIN 17	17	1,98	5,35
PIN 19	19	2,10	5,67

FOR SOL 40 P AND TERMINAL PIN

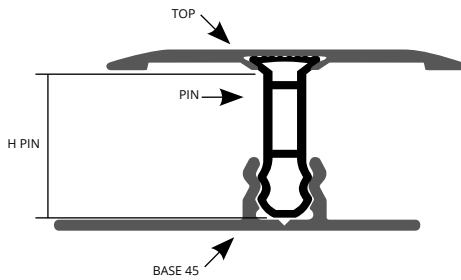

RIGID IMPACT-RESISTANT NO-TOXIC VINYL RESIN
bar length 2,7 lm - pack. 20 Pcs - 54 LM

Article	H mm	€/lm	€/Pc
PIN 09	9	1,40	3,78
PIN 11	11	1,54	4,16
PIN 13	13	1,68	4,54
PIN 15	15	1,81	4,89
PIN 17	17	1,98	5,35
PIN 19	19	2,10	5,67

FOR ZERO CURVE, STYLE STAIR

PIN 07
scale 1:1



PIN 09
scale 1:1



PIN 11
scale 1:1



PIN 13
scale 1:1



PIN 15
scale 1:1



PIN 17
scale 1:1



PIN 19
scale 1:1



For a correct assembly, see the drawings of the complete products in the previous pages

PROINSERT BASE 45 AND BASE 40

NATURAL ALUMINIUM




ALUM. PUNCHED/PERFORED FOR SOL 30-40-50 AND ZERO CURVE
bar length 2,7 lm - pack. 20 Pcs - 54 LM


Article	width mm	€/lm	€/Pc
PINBFT 45	45	6,07	16,39
PINBFT 40	40	5,99	16,17



PINBFT 45
scale 1:1



PINBFT 40
scale 1:1

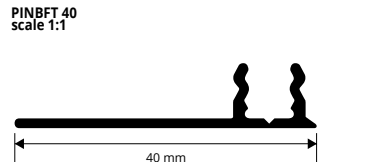

SCREWS and SCREW ANCHORS to fix all perforated version

NICKEL-PLATED

NICKEL - PLATED FLATHEAD SCREWS + SCREW ANCHORS
pack. 1.000 Pcs

Article	Ø mm	length mm	€/Pack.
VINIPT 325	03	25	87,17

BRASS - PLATED FLATHEAD SCREWS + SCREW ANCHORS
pack. 1.000 Pcs

Article	Ø mm	length mm	€/Pack.
VIOTPT 325	03	25	87,17

